

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. Customer Service Phone Number: 502-562-0000

HARDWARE LIST

- A (10) 1/4" x 5/8" Allen Bolts
- B (4) 1/4" x 1/2" Allen Bolts
- C (2) 1/4" x 1" Allen Bolts
- D (12) Flat Washers
- E (12) Spring Washers
- F (1) Allen Wrench

PARTS LIST

- G (1) Stool Back
- H (1) Stool Base
- I (4) Legs
- J (1) Cross Frame







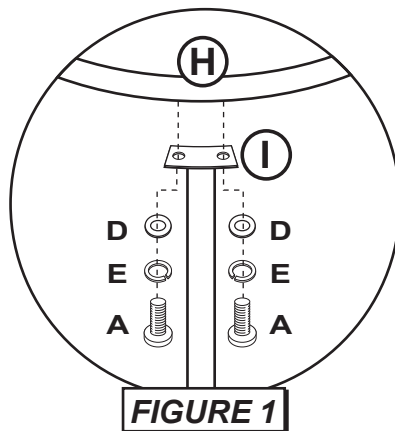
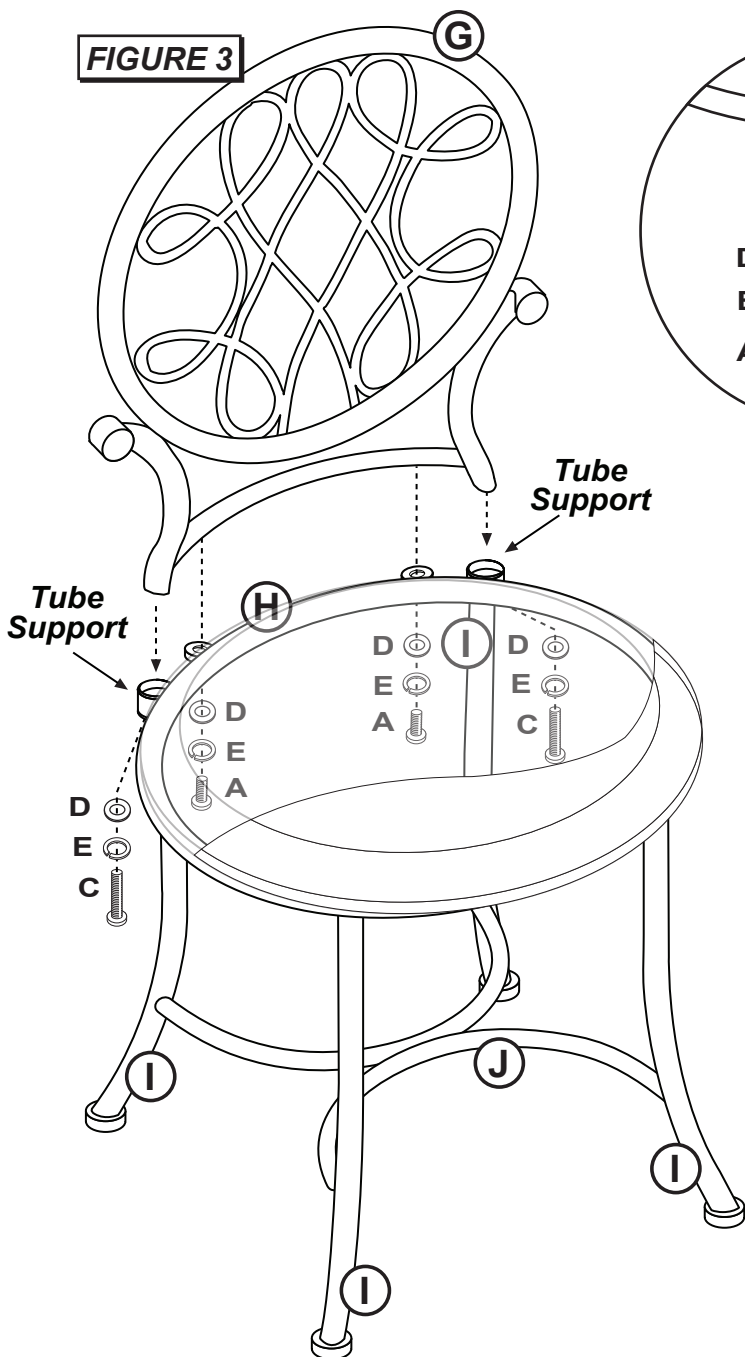
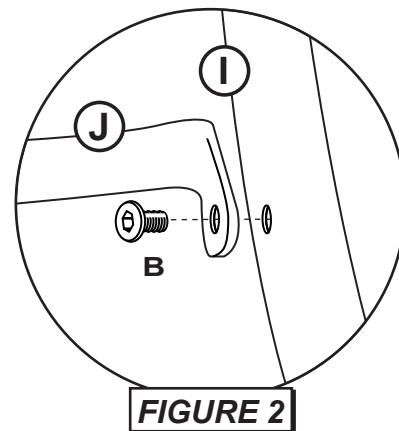
PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	10		B	4	
C	2		D	12	
E	12		F	1	

FIGURE 3

FIGURE 1

FIGURE 2
STEP 1

Begin assembly by first attaching each Leg (I) to Stool Base (H) using 2 Allen Bolts (A), 2 Spring Washers (E) & 2 Flat Washers (D) per each leg. See **Figure 1**.

STEP 2

Attach the Cross Frame (J) to each Leg (I) using 1 Allen Bolt (B) per each leg. See **Figure 2**. Tighten all bolts from **Figures 1 & 2**.

STEP 3

Attach Stool Back (G), by inserting into tube supports located on back of Stool Base (H), then use 1 Allen Bolt (A), 1 Spring Washer (E) & 1 Flat Washer (D) per each end, Tighten all bolts. See **Figure 3**.

STEP 4

Attach Stool Back (G) to Stool Base (H), using 2 Allen Bolts (C), 2 Spring Washers (E) & 2 Flat Washers (D) to hold tight. Tighten all screws. See **Figure 3**.