



### **FEATURES & BENEFITS**


- ★ 4 ExtraLow<sup>®</sup> burners for simmering, melting, or holding long durations
- ★ ExtraHigh Star<sup>®</sup> Burner—22,000 BTUs of power for searing or boiling
- ★ Hydraulic SoftClose<sup>®</sup> hinges prevent slamming for ultra smooth closing
  - Superior grilling results, thermostatically controlled for even heating
  - Superfast 2.5-hour self-clean mode-fastest in the industry

### TECHNICAL DETAILS

I EGHNICAL DETAILS		
Circuit Breaker	20 A	
Volts	120 V, 60Hz 3 Wire	
Energy Source	Gas	
Plug Type	120V-3 prong	
Power Cord Length	65" (1,651 mm)	
Gas Supply	3/4"	
WARRANTY		
Limited Warranty, Entire Appliance, Parts and Labor	2 Year	

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

## RANGETOP



Total Number of Cooktop Burners	4 + Grill
1 – Power of Back Left Burner BTU	15,000 and XLO
2 – Power of Front Left Burner BTU	22,000 and XHI / XLO
3 – Power of Center 12" Electric Grill	1,630 W (6-Pass 2x)
4 – Power of Back Right Burner BTU	15,000 and XLO
5 – Power of Front Right Burner BTU	18,000 and XLO
OVEN	
Oven Capacity	5.7 cu. ft.
Cooking Modes	·
Bake, Convection Bake, Roast, Broil, Keep	o Warm

•		
Sabbath	Yes	
Self-Clean	Yes	
Telescopic Rack(s)	3	
Interior Lights	2	
Bake Power	23,700 BTU	
Broil Power	17,500 (Infrared) BTU	
Home Connect™ (Wi-Fi Enabled)	Yes	
Cavity Interior Dimensions (HxWxD)	16 <b>1/4</b> " x 28" x 21 <b>1/2</b> "	
Cavity Usable Dimensions (HxWxD)	11 <b>1/4</b> " x 25 <b>3/8</b> " x 19 <b>1/2</b> "	
DIMENSIONS & WEIGHT		
Overall Appliance Dimensions (HxWxD)	35 <b>3/4</b> " – 36 <b>3/4</b> " × 35 <b>15/16</b> " × 27 <b>7/8</b> "	
Required Cutout Size (HxWxD)	37 <b>3/4</b> " – 36 <b>3/4</b> " × 36" × 24" – 25 <b>1/8</b> "	
Net Weight	374 lbs.	



## ACCESSORIES (INCLUDED)

3 Telescopic Racks, Multi-Point Meat Probe, 2 Grill Grates, 1 Bx. Ceramic Briquettes, 1 Lg Broil Pan, Island Trim

### ACCESSORIES (OPTIONAL)



PABRICKBKW Flat Ceramic Briquettes with Basket



PWOKRINGHC Wok Ring



2 Star Burners, High-Release Coating PA12LCVRN 12" Professional Indoor Grill Cover



# PA36WTKG Toekick

PAGRIDDLE



# PALPKITGGW

LP Conversion Kit, Pro Grand Gas Models with 4 and 6 Burners

Professional Griddle, Sits on Top of Grates Over



PABRICKW Flat Ceramic Briquettes without Basket



PA12CHPBLK Chopping Block / Cutting Board



PAGRIDDLEW 12" Pro Griddle Plate (for Briquette Grill Models), Fusion Coating



PA36WLBG 7" Low Backguard\*



PAKNOBLUWG Metallic Blue Knob Kit

PAALTKITGW High Altitude Kit, Natural Gas Pro Grand Ranges, 5,400 ft. to 10,200 ft.


#### Contact Customer Support

High Altitude Kit, Gas or Dual-Fuel Pro Grand Ranges Connected to LP Gas, 10,000 ft. to 10,200 ft.

\*Models PCG305xx, PRD305xx, PRD606xx, PRG305xx, PRG304xx and PRD304xx are suitable for 0" rear clearance to combustible surfaces. All other models: when using the included Island Trim a minimum 6" (152 mm) rear clearance is required to a combustible surface. When installing against a combustible surface, a Thermador® Low Backguard is required for a 0" rear clearance to the combustible surface. A Thermador Low Backguard must be purchased separately. A rear clearance to a surface covered in a noncombustible material (metal, ceramic tile, brick, marble, or stone) is 0" when using the included Island Trim. Clearances of less than 6" (152 mm) should be approved by the local codes and/or by the local authority having jurisdiction. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA.




#### **36-INCH RANGE DIMENSIONS**

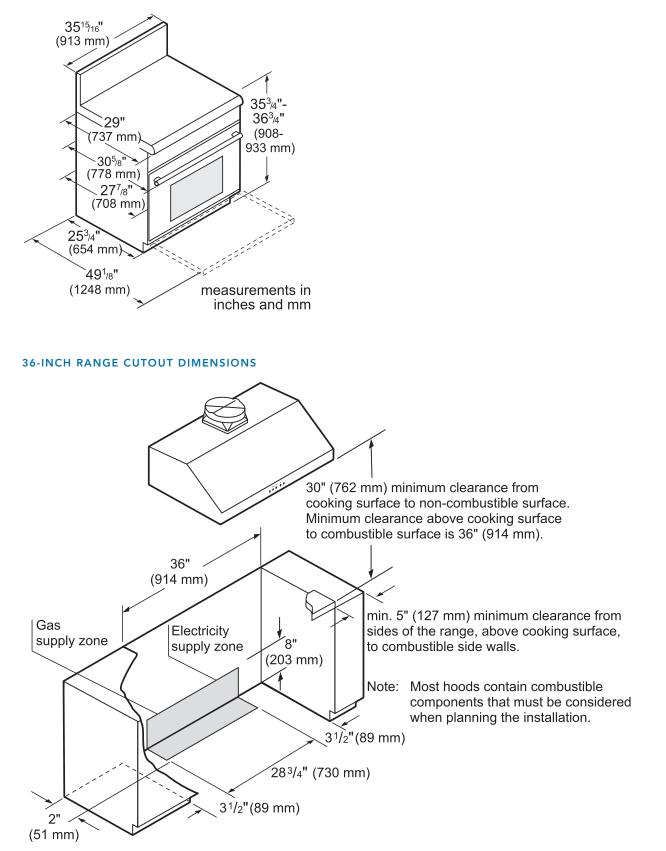




### 36-INCH RANGE CUTOUT DIMENSIONS

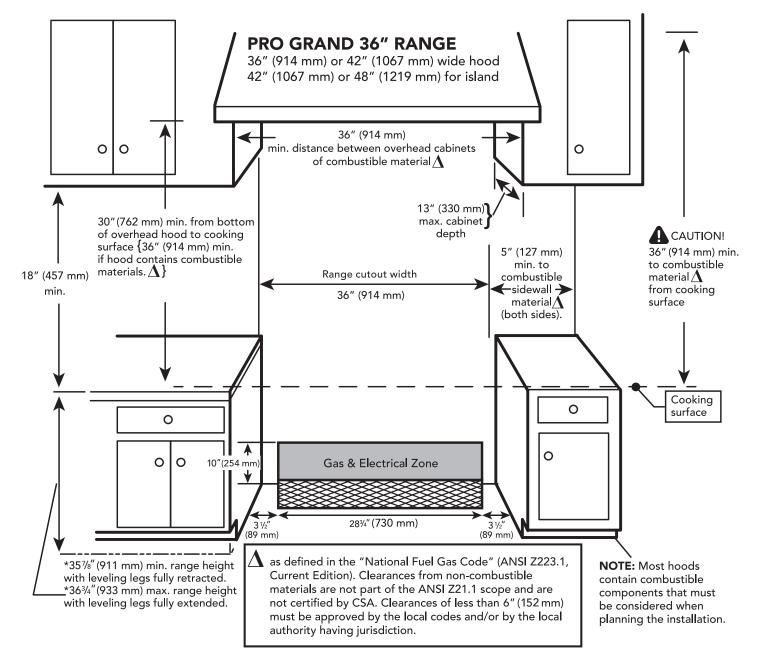



### 36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "LOW BACK"


NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

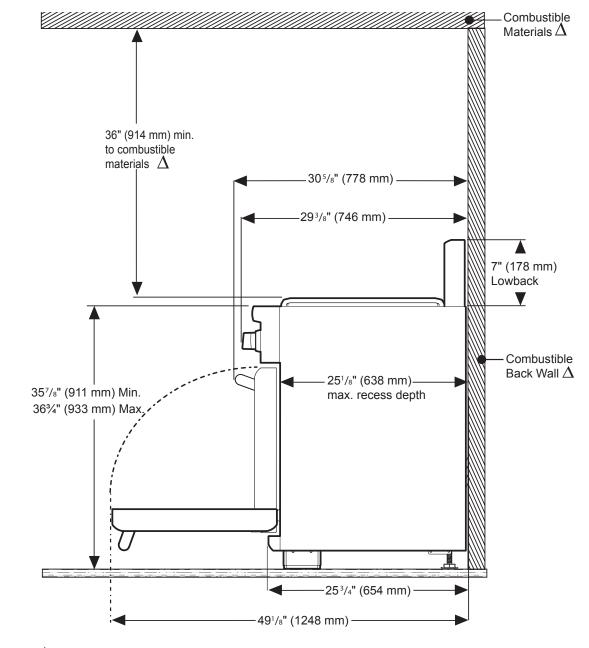

 $\Delta$  As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.



#### 36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

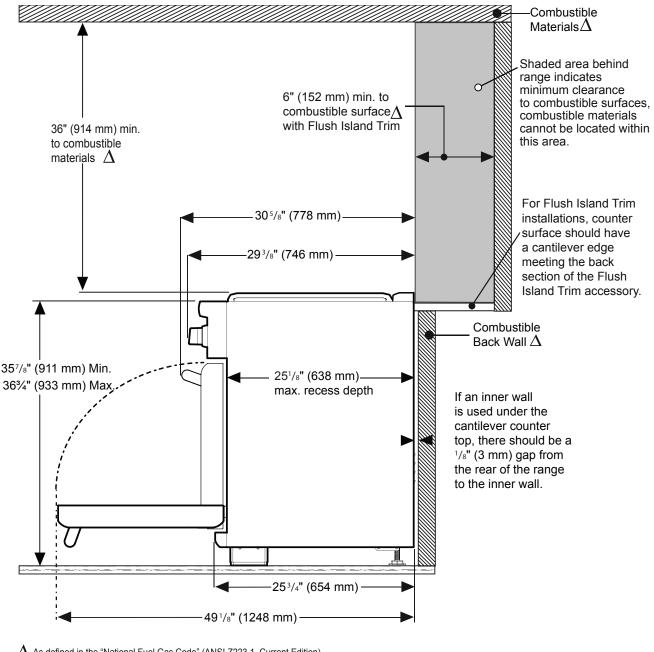

As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.