
CWC8



RECOMMENDED AMP RMS POWER

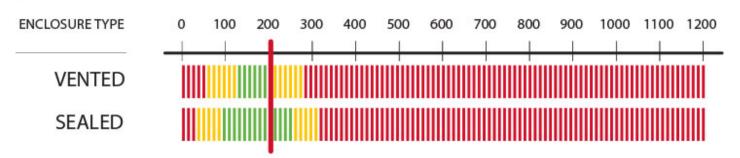

Specifications

Thiele/Small Parameters



44CWCD84 T/S Parameters PDF

(/app/products/caraudio/subs/compc17/p44_cwcd84/files/44CWCD84.pdf)

Size (IN.,CM)

8, 20

Impedance (OHMS)

4 DVC

Recommended Amplifier Power (watts RMS)

200

Peak Power (watts, per ANSI/CTA-2031-A)

400

Sensitivity (dB 1w/1m)

85.6

Mounting Depth (in, cm)

3-7/8, 9.8

Mounting Diameter (in, cm)

7, 17.7

Min Sealed Box Vol (cu. ft, L)

0.5. 14.2

Max Sealed Box Vol (cu. ft, L)

1.2, 34

Min Vented Box Vol (cu. ft, L)

0.66, 18.7

Max Vented Box Vol (cu. ft, L)

1.2, 34

*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

Due to continual developement, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

You may also like these related products* -



43CWR8G

8" CompR Grille

(8-inch-compr-grille)

^{**}Port Volume Excluded.