

LF26C6230V

26 cu. ft. Counter Depth MAX™ Refrigerator

26 cu. ft. Large Capacity

External Ice & Water Dispenser

Ice Plus

Fresh Air Filter

Door Cooling

Smart Inverter

PrintProof™ Noble Steel

ThinQ®

AVAILABLE COLORS

PRINTPROOF™ NOBLE STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

SUMMARY

Refrigerator (cu.ft.) 16.9

Freezer (cu.ft.) 8.6

Total Capacity (cu.ft.) 25.5

ENERGY

ENERGY STAR® Certified Yes

Energy Consumption (kWh/Year) 699

REFRIGERATOR

No. of Shelves 4 Split (4 Fixed)

Shelf Construction Spill Protector Tempered Glass

Shelf Trim White décor

No. of Crisper Bins 2

Light Yes

Cool Guard No

Fresh Air Filter Yes

Light Yes

REFRIGERATOR DOOR

No. of Door Bins (left door) 3

No. of Door Bins (right door) 3

Door Shape Flat

Handle Type Pocket

FREEZER

Door Type Pull Drawer

Handle Type Pocket

Drawers / Shelves 2-Tier Organization

Freezer Light Upper LED Lighting

ICE & WATER SYSTEM

Dispenser Ice & Water

Dispenser Color Dark Graphite

No. of In-door Ice Maker 1

In-door Ice Maker Ice Type Cubed / Crushed

In-door Ice maker Daily production (lbs) 3.0 / 3.3 (Ice Plus) lbs.

In-door Ice Storage Capacity 3.0 lbs

Ice Plus Yes

Filtration System 1 Stage

Filter LT1000P

COOLING

Compressor Type Smart Inverter Compressor

Refrigerant R600a / 78g / 2.75oz

Evaporator 1

Multi Air Flow Cooling

Door Cooling Yes

Temperature Sensors 2

DISPLAY

Display Type Smooth Touch Control / White LED

Temperature Control Electronic/ Digital

Door Alarm Yes

Child Lock Yes

Smart Diagnosis Yes

Auto Closing Door Hinge Yes

Wi-Fi Enabled Yes

ThinQ® Yes

ThinQ® Care Yes

Sabbath Mode Yes

ADA Compliant Yes

MATERIALS & FINISH

Hidden Hinges Yes

All Available Colors Noble Steel

PrintProof™ Yes

Insulation Low GWP and Zero ODP Blowing Agent

DIMENSIONS/CLEARANCES/WEIGHTS

Total (WxHxD) 35 3/4" x 70 1/4" x 29 1/8"

Width 35 3/4"

Height (Top of Hinge or Door cap Décor) 70 1/4"

Width (Door Open 90° without Handle) 40"

Case Edge Clearance (Door Fully Open) 21" (R) 9 5/8" (L) 11 3/8"

Width (Door Fully Open without Handle) 56 3/4"

Door Edge Clearance without Handle 2 1/4"

Height to Top of Case 68 7/8"

Height (Floor to Top of Freezer Door) 27 7/8"

Depth without Door 24 3/4"

Depth without Handles 29 1/8"

Depth (to Hinge Cover) 18 1/4"

Depth (Total with Door Open) 43 5/8"

Depth (Draw Open Fully without Handle) 48 7/8"

Installation Clearance Sides 1/8", Top 1", Back 2"

Carton Dimensions (WxHxD) 38" x 73" x 32"

Weight (Unit/Carton) 262 lbs / 284 lbs

LIMITED WARRANTY

Parts & Labor 1 Year



Sealed System (Parts & Labor) 5 Years

Compressor (Parts & Labor) 5 Years

Inverter Compressor (Parts only) 6-10 Years

UPC CODES

LF26C6230V 195174133781

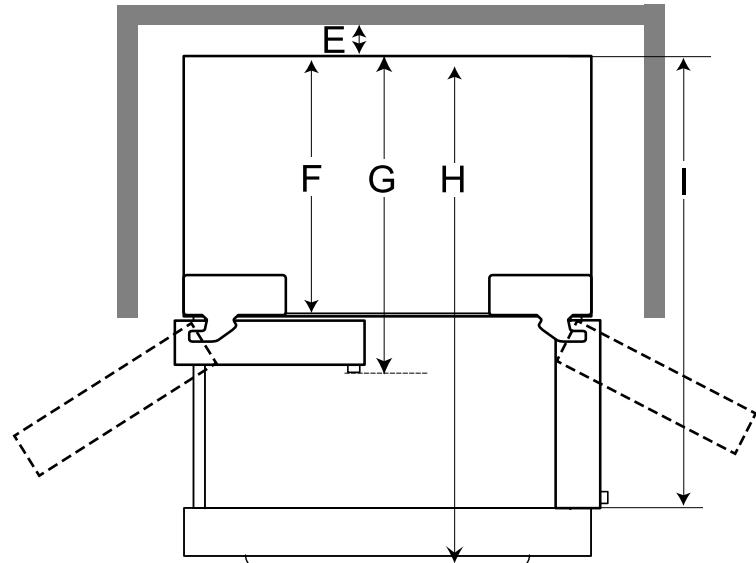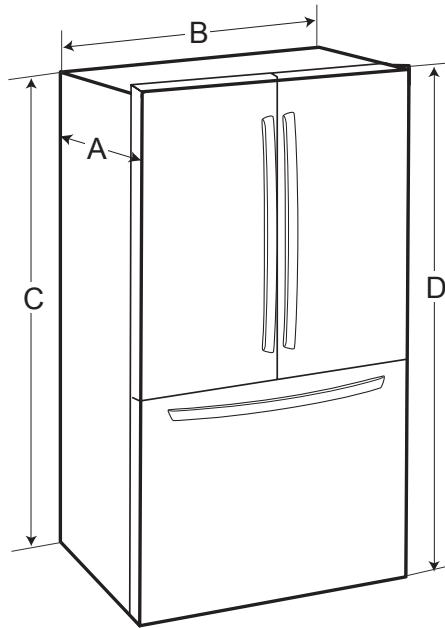

DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges.

Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

DIMENSIONS

A	Depth without Handle	29 1/8" (739 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/4" (628mm)
G	Depth with Handle	31 5/8" (802mm)
H	Depth (Total with Freezer Drawer Open)	48 7/8" (1239 mm)
I	Depth (Total with Door Open 90°)	43 5/8" (1106mm)

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or side-to-side.

If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

- Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
- Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE

- A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

