

Professional Range 30"


SPR30UIMAN
Matt Black
Full electric



Compact-design range with electric oven and induction or ceramic glass cooktop: the perfect mix of style, quality and technology thanks to homogeneous and instantaneous heat, maximum safety and attention to consumption.

Features

- Induction hob** - Induction offers fast cooking and precise temperature control
- Vapor Clean** - By inserting water into a recess at the bottom of the cavity, steam is generated, which softens the residue and facilitates its removal
- Touch control** - Easy and intuitive timer setting with a single touch
- True-convection** - The best cooking performances guaranteed by ventilated circular flow.
- Tangential cooling** - New cooling system with tangential fan and airflow from the door to the splashback
- Soft close** - The door is equipped with a specific system for silent closing

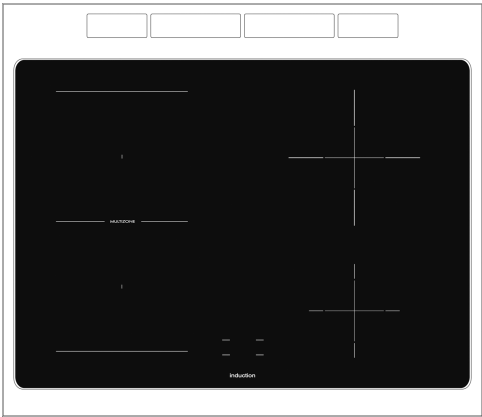

Cooktop technical features

Cooking zones	4
Rear-left - 1850 W - Booster 3000 W	
Front-left - 1850 W - Booster 3000 W	
Rear-right - 2300 W - Booster 3700 W	
Front-right - 1400 W - Booster 2200 W	

Aesthetic

Color	Matt Black
Series	Professional

General information

Range size	30"
Range type	Full electric

Programs / Functions

No. of cooking functions	8
Cleaning functions	VaporClean

Main oven options

Minimum Temperature	151 °F
Maximum temperature	500 °F

Main Oven Technical Features

Volume	4.56 cu. ft.
Cavity material	EverClean enamel
No. of shelves	6
Removable inner door	No
Total no. of door glasses	3
Soft Close system	Yes

Included accessories

Oven wire rack	2
----------------	---


Electrical Connection

Circuit breaker	50 A
Voltage	208/240 V
Frequency	60 Hz

Logistic Information

Width	29 15/16 "
Depth	26 "
Height	34 13/16 "
Net weight	211 lbs

Product dimension drawing

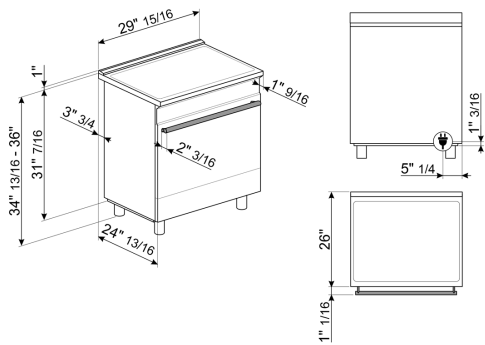


Accessories

		
GT3T Total-extraction telescopic guides	KITTKSPR30 Plinth, 3 sides, 900mm , SPR cookers 30", black	PALPZ Pizza shovel with fold away handle

Color option

	
SPR30UIMMW Color: Matte white	SPR30UIMX Color: Stainless steel

Product installation drawing

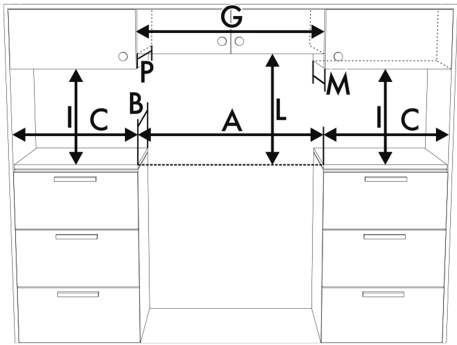

A	24"	610 mm
B	25"	630 mm
C ¹	5 7/8"	150 mm
G ²	24"	610 mm
I ³	18"	457 mm
L	see user manual	
M ⁴	13"	330 mm
P ⁴	13"	330 mm