



# SPECIFICATIONS

## QZ SERIES

### RANGE HOODS



**250 CFM/5.5 Sones @ 0.10" SP. Horizontal**  
**260 CFM/6.0 Sones @ 0.10" SP. Vertical**

#### • Dimensions

Overall bottom projection - 18<sup>3</sup>/<sub>8</sub>"  
 Overall top projection - 12"  
 Height - 6"  
 Available widths: 30" & 36"

#### • Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel.  
 Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

#### • Motor

Fully enclosed PSC 4 pole motor. Variable speed, thermally protected, permanently lubricated. Rated 115/120 Volts, 60 hz.

#### • Lighting



Enclosed in a polycarbonate lens, 60 watt max. type A15 appliance lamp (bulb not included), complete with night light setting.

#### • Ducting Options

Horizontal ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
 Vertical ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
 Vertical ducting: 7" round (duct adapter and damper not included).  
 Ductless: removable front vent (charcoal filter not included).

#### • Blade

Polymeric axial fan blade 9<sup>1</sup>/<sub>8</sub>" diameter with 7 paddles.

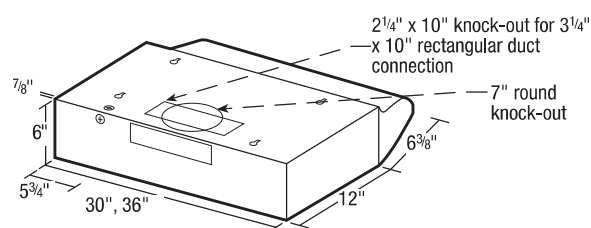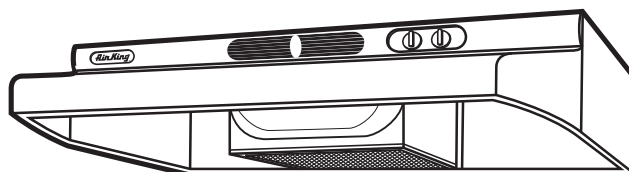

#### • Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp  
 Hood back - 7/8" knockout hole for use with 1/2" cable clamp

#### • Filters

UL rated, class 2 filter.  
 Grease Filter: GF-06 (included).  
 Charcoal Filter: CF-06 (not included).

#### • Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

### EXPANDED PERFORMANCE

| Air Flow - CFM    | Static Pressure (inches of w.g.) |      |     |      |     |      |     |      | Sones<br>@ .1 SP | Fan Speed<br>RPM | Power<br>Watts | Amps |
|-------------------|----------------------------------|------|-----|------|-----|------|-----|------|------------------|------------------|----------------|------|
|                   | 0                                | 0.05 | 0.1 | 0.15 | 0.2 | 0.25 | 0.3 | 0.35 |                  |                  |                |      |
| Vert Ducting High | 294                              | 279  | 260 | 250  | 238 | 213  | 184 | 151  | 6.0              | 2255             | 94             | 2.0  |
| Horz Ducting High | 292                              | 274  | 250 | 238  | 225 | 195  | 165 | 135  | 5.5              | 2141             | 93             | 2.0  |
| Vert Ducting Min  | 206                              | 184  | 149 | 127  | 103 | 48   | -   | -    | 1.5              | 1579             | 32             |      |
| Horz Ducting Min  | 209                              | 179  | 138 | 115  | 92  | 47   | -   | -    | 1.5              | 1499             | 32             |      |

|                   |                     |            |                |            |              |             |                     |            |                                         |  |             |  |
|-------------------|---------------------|------------|----------------|------------|--------------|-------------|---------------------|------------|-----------------------------------------|--|-------------|--|
| <b>PROJECT</b>    |                     |            |                |            |              |             | <b>ARCHITECT</b>    |            |                                         |  |             |  |
| <b>LOCATION</b>   |                     |            |                |            |              |             | <b>ENGINEER</b>     |            |                                         |  |             |  |
| <b>CONTRACTOR</b> |                     |            |                |            |              |             | <b>SUBMITTED BY</b> |            |                                         |  | <b>DATE</b> |  |
| <b>FAN NUMBER</b> | <b>MODEL NUMBER</b> | <b>CFM</b> | <b>IN W.C.</b> | <b>RPM</b> | <b>WATTS</b> | <b>AMPS</b> | <b>SONES</b>        | <b>QTY</b> | <b>OPTIONAL EQUIPMENT &amp; REMARKS</b> |  |             |  |
|                   |                     |            |                |            |              |             |                     |            |                                         |  |             |  |



**U.S.:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:** 8 Edvac Drive  
 Brampton, Ontario L6S 5P2  
 Tel: (905) 456-2033 • 800-250-8767  
 Fax: (905) 456-1015