

Built-In 30" Refrigerator

K 1813 SF / K 1803 SF



Built-In 30" Refrigerator

K 1813 SF / K 1803 SF



SPECIFICATIONS

K 1803 SF — Item 36180311USA - Right Hinged

K 1813 SF — Item 36181311USA - Left Hinged

Overall Unit Width - Excluding Fascia Dimension 29³/₄" (755 mm)

Overall Unit Height - Excluding Fascia Dimension 83¹/₂" - 85³/₁₆" (2121 mm - 2165 mm)

Overall Unit Depth - Excluding Fascia Dimension 24" (610 mm)

Overall Fascia Dimensions 30¹/₂" (775 mm) W x 84" - 85¹¹/₁₆" (2134 mm - 2176.5 mm) H x ³/₄" (19 mm) D

Niche

Minimum Cabinet Opening Width 30" (762 mm)

Minimum Cabinet Opening Height 83⁵/₈" (2124 mm)

Minimum Cabinet Opening Depth 24" (610 mm)

Electrical

Electrical Requirements - Volts/Amps 110V / 120V, 60Hz, 15 Amps
In the case of side-by-side installations, a separate outlet must be used for each appliance.

Power Cord - Plug and length Yes - NEMA 5-15 plug, 5 ft (1.52 m)

Shipping

Shipping Weight 467 lbs (212 kg)

Shipping Dimensions 33⁵/₈" W x 89³/₄" H x 29¹/₄" D

Support

Call Miele 800.843.7231

Miele Website www.mieleusa.com

20/20 Link 2020technologies.com

Features:

- MasterCool controls
- ClearView lighting system
- Drop and Lock Shelves
- SmartFresh storage drawers
- FullView storage drawers
- RemoteVision capable
- Acoustic door and temperature alarm
- Optical door and temperature alarm
- Energy Star

Miele

Outer Trim Details*

1/2" (13 mm)

3/4" (19 mm)

29 3/4" (755 mm)

30 1/2" (775 mm)

24 3/4" (629 mm)

10 1/4" (260 mm)

1 1/8" (29 mm)

4" - 5 3/16" (102 - 132 mm)

84" - 85 11/16" (2134 - 2176.5 mm) Fascia dimensions

24" min. (610 mm)

30" (762 mm)

> 83 5/8" (2124 mm)

Location Codes

Volt - 15 Amp 3-wire molded plug power disconnects lower left rear

EMA 5-15 Outlet - locate less than 9" above or

Notes

is must be done in accordance with local codes

* Outer Trim runs completely across the top and down the sides of the unit. The Side Trim stops at the bottom edge of the door panel.

E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear
O - Standard NEMA 5-15 Outlet - locate less than 9" above finished floor


- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation - please adjust accordingly

Built-In 30" Refrigerator

K 1813 SF / K 1803 SF




POWER SUPPLY CONNECTION BACK VIEW

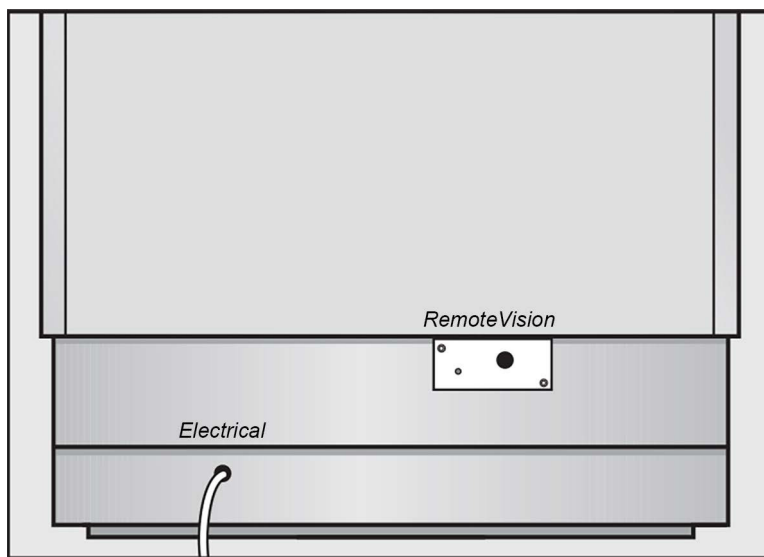


Electrical - 5 foot (1.52 m) - 120 Volt - 15 Amp - NEMA 5-15 molded plug

DOOR PANEL DIMENSIONS WITHOUT OUTER TRIM

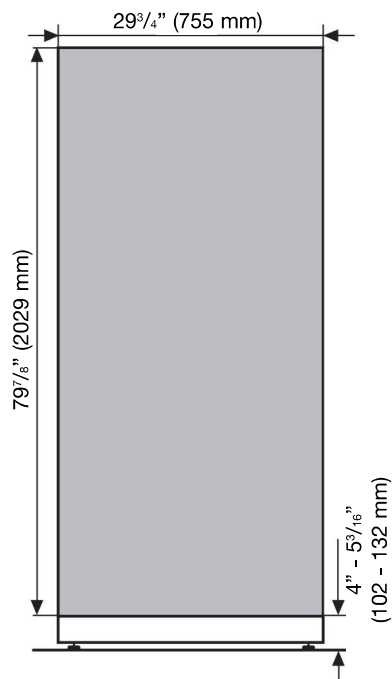


HINGING DETAILS


90° Door

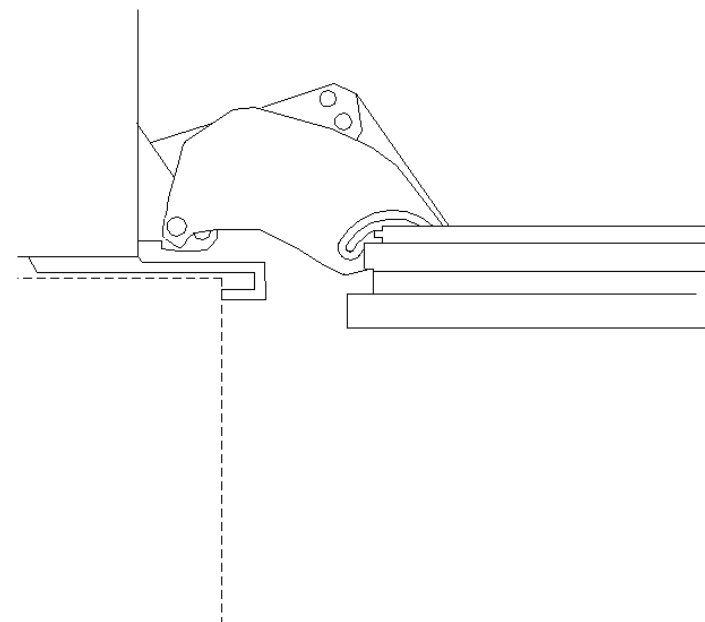

Door Swing

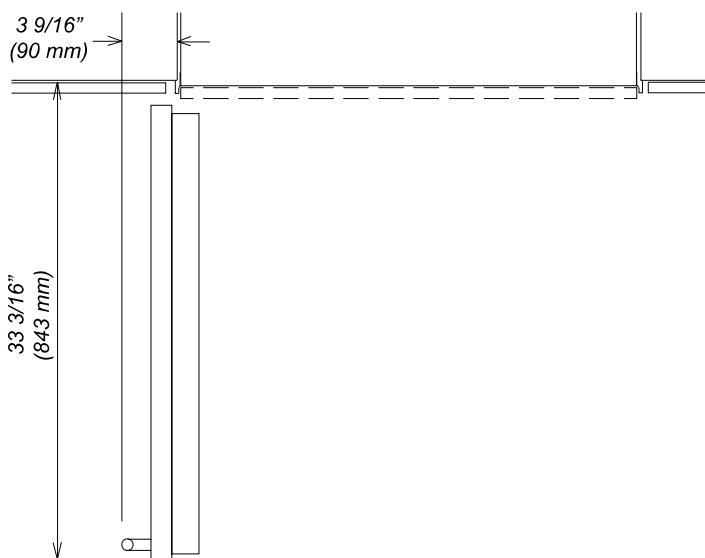

115° Door

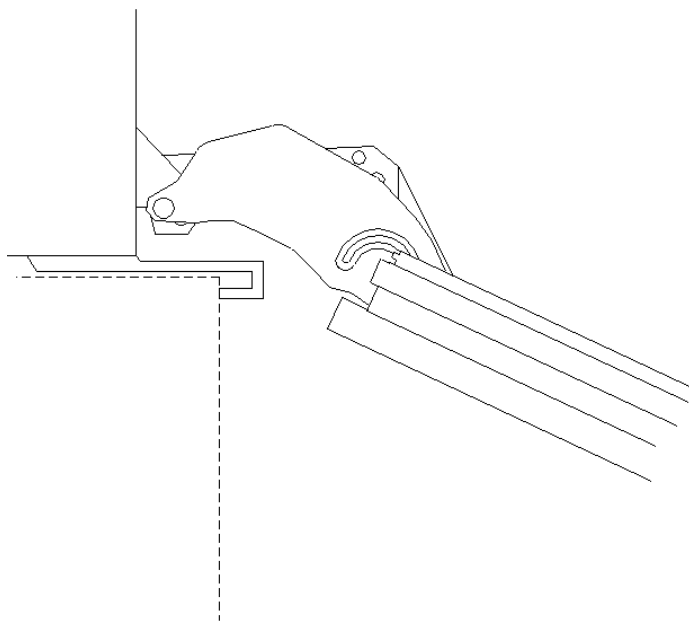

Door Swing

