FRIGIDAIRE GALLERY.

FGGF3047TF





SIGNATURE FEATURES



Quick Bake Convection Bake faster and more evenly with Quick Bake Convection.



Power Burner Power Burner offers more power and faster boil time with 17,000 BTU burner.



CustomFlex[™] Cooktop with Griddle and Oval Burner

Evenly heat and cook pancakes, hamburgers, or quesadillas on the CustomFlex™ Cooktop that includes a Center Oval Burner and cast iron griddle.



Steam Cleaning A 30-minute light oven cleaning that's chemical-free, odor-free, and fast.



FREESTANDING RANGE

30" GAS

PRODUCT DIMENSIONS

Height (Max.)	46-5/8″
Width	29-7/8″
Depth (Incl. Handle)	29-1/4"

MORE EASY-TO-USE FEATURES

Quick Clean Quickly clean your oven in 2 hours with our quick self-clean cycle.

One-Touch Self-Clean Your oven cleans itself — so you don't have to. Self clean options available in 2- and 3-hour cycles.

Smudge-Proof[™] Stainless Steel Resists fingerprints and cleans easily.

Continuous Corner-to-Corner Grates Move heavy pots and pans without lifting with continuous, corner-to-corner grates.

Low Simmer Burner

Perfect for cooking delicate foods and sauces.

Auto Shut-Off

As an extra safety measure, the oven will automatically shut off after 12 hours.

CERTIFICATIONS

Star-K[®] Certified (Sabbath Mode)

BURNERS	BTU
Right Front	17,000
Right Rear	5,000
Left Front	9,500
Left Rear	14,000
Center Oval	10,000

FGGF3047TF FREESTANDING RANGE 30" GAS

FRIGIDAIRE GALLERY.

FEATURES

TERTORES	
Oven Control/Timing System	Express-Select* Controls
Surface Type	Black Porcelain
Sealed Gas Burners	Yes
Grates	Continuous Cast Iron w/Black Matte Finish
Window	Extra-Large
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Exterior Finish (Side Panels)	Black
Convection System	Quick Bake
Oven Cleaning System	Self Clean
Drawer Functionality	Storage

OVEN CONTROLS	
Bake/Broil	Yes/Variable High/Low
Effortless™ Convection Conversion	
Convection Bake/Broil/Roast	
Quick Bake Convection	Yes
Quick Preheat	
My Favorite	
Effortless™ Temperature Probe	
Keep Warm	
Add-a-Minute	
Delay Start	
Self Clean	2, 3 Hours
Quick Clean Option	Yes
Delay Clean	Yes
Kitchen Timer/Timed Cook Option	
Auto Oven Shut-Off	12 Hours
Oven Lockout	Yes
Lower Drawer Control	
COOKTOP FEATURES	


17,000
5,000
9,500
14,000
10,000
5.0
1
2 Standard Racks
Even Baking Technology
Vari-Broil™ Hi/Lo
18,000/13,500

OPTIONAL ACCESSORIES

LP Gas Conversion Kit	PN# GRLP4
Griddle	Included
CERTIFICATIONS	
Star-K® Certified (Sabbath Mode)	Yes
SPECIFICATIONS	
Oven Interior (H x W x D)	18-5/8" x 24-3/8" x 19-1/8"
Power Supply Connection Location	Left Bottom Rear
Gas Supply Connection Location	Right Bottom Rear
Voltage Rating	120V/60Hz/5A
Amps @ 120 Volts	5
Shipping Weight (Approx.)	205 Lbs.

PRODUCT DIMENSIONS

A-Height (Max.)	46-5/8"
B-Width	29-7/8"
C-Depth (Incl. Handle)	29-1/4"
Depth with Door Open 90°	46-9/16"
CABINET CUTOUT DIMENSIONS	
CABINET CUTOUT DIMENSIONS Height (Standard)	36"
	36″ 30″

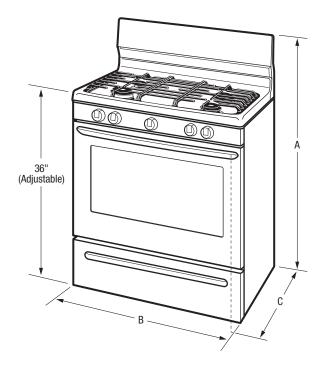




Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com

FRIGIDAIRE -

FGGF3047TF FREESTANDING RANGE 30" GAS

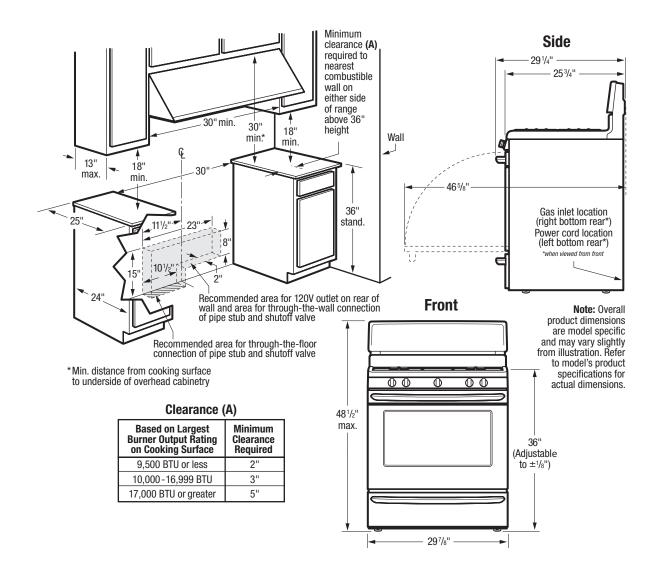

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) 205 Lbs.
- Voltage Rating 120V/60 Hz/5 Amps
- Amps @ 120 Volts = 5 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90°F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible. (Optional LP Gas conversion kit available.)

- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with O" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts..

OPTIONAL ACCESSORIES

- LP Gas Conversion Kit (PN# GRLP4).
- Griddle Included

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com

FRIGIDAIRE -