

Refrigeration Equipment Reach-In Refrigerator, 3 Door, 72 cu.ft - Stainless Steel (R290)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738243 (KCHRI81R3DR)

3-door reach-in refrigerator,
stainless steel, 81 cubic feet,
R290 refrigerant
gas, +33/+41°F - Energy star

Short Form Specification

Item No.

3 full doors refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Interior LED light to save energy and for best internal visibility.

Construction


- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Optional Accessories


- shelf for 54" and 81" (left/right) reach-in PNC 880591 ☐
- middle shelf for 81" reach-ins PNC 880592 ☐
- shelf clips PNC 880611 ☐

APPROVAL: _____

Refrigeration Equipment Reach-In Refrigerator, 3 Door, 72 cu.ft - Stainless Steel (R290)

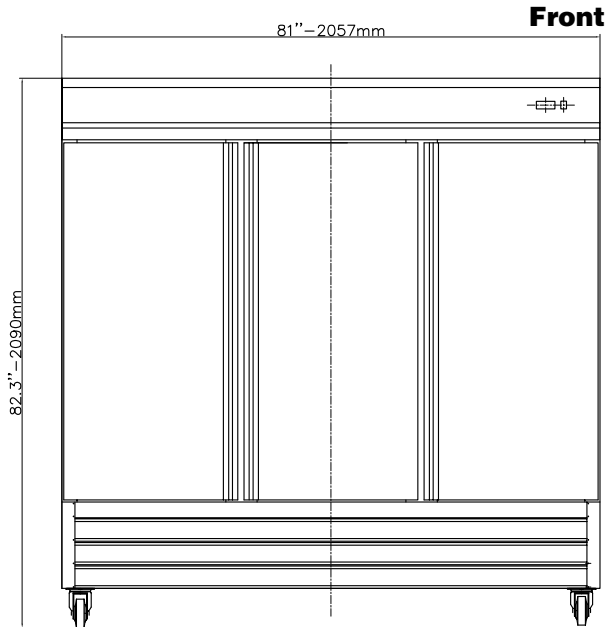

Front

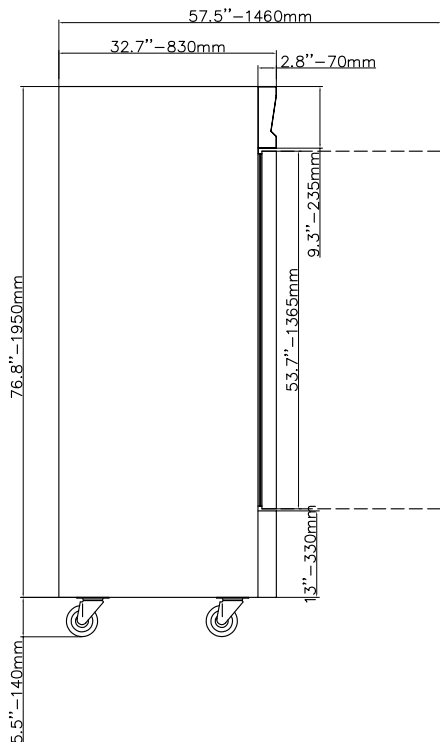

Side

EI = Electrical connection

Electric

Supply voltage:

738243 (KCHRI81R3DR) 115 V/1 ph/60 Hz

Electrical power, max:

0.8 kW

Current consumption:

7.5 Amps

Plug type:

USA NEMA 5-15P

Key Information:

Capacity (Cu. Ft.)	72
Door hinges:	1 Left+2 Right
External dimensions, Width:	81 " (2057 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	27 1/16"
Internal Dimensions (height):	60 1/4"
Internal Dimensions (width):	76 5/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	668 lbs (303 kg)
Shipping volume:	139.55 ft ³ (3.95 m ³)
Number and type of grids (included):	9 - Vinyl-Coated Steel
Type of external material:	430 AISI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	3/4
Refrigerant type:	R290
Refrigerant weight:	150 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost



Refrigeration Equipment
Reach-In Refrigerator, 3 Door, 72 cu.ft - Stainless Steel (R290)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.