


MODEL P195ES70SB POWER PACK

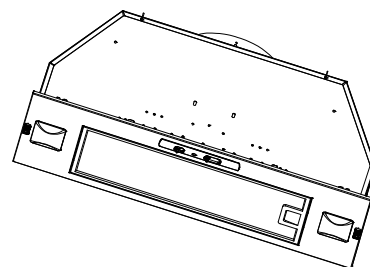

ENERGY STAR® efficiency for custom applications provides the ventilation and lighting you need in one integrated package.

FEATURES

- 3-speed control
- Centrifugal blower, 370 CFM, 5.0 Sones
- 8" round duct connector/backdraft damper
- Enclosed light
- Two 13 Watt, G24Q-1 compact fluorescent lamps (included)
- One piece washable aluminum mesh filter
- 430 stainless steel finish
- Heat Sentry™ automatically turns blower to high speed when excess cooking heat is detected
- Fully enclosed bottom
- Power supply cord included
- One Year Limited Warranty
- Recommended for use with Models L7030, L7036, and L7048 Liners
- For indoor use only

OPTIONS

- Protect cabinet with Model L7030, L7036, or L7048 Stainless Steel Liner
- Recirculation filter Model ROUNDFILTER
- MD6TU / MD8TU

SPECIFICATIONS

VOLTS	HZ	AMPS	CFM		SONES		DUCT
120	60	2.9	MAX.	NORM.	MAX.	NORM.	8" round
			370	130	5.0	0.3	



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

TYPICAL SPECIFICATION

Power Pack shall be Best Model P195ES70SB.

Power Pack shall have a 3-speed fan switch and separate light switch.

Fan must be ducted and use a washable aluminum mesh filter.


Unit shall have a 430 stainless steel finish.

Air delivery to be at least 370 CFM and sound levels not greater than 5.0 Sones.

Unit shall be UL and cUL listed.

Air and sound ratings to be certified by HVI.

Unit shall be ENERGY STAR® certified.

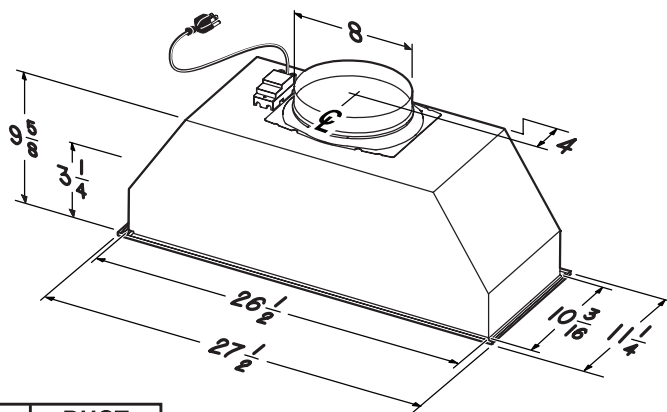

BEST® Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date