

UNDER-COUNTER ICE MAKER

UR15IM20RS (RIGHT DOOR SWING) UL15IM20RS (LEFT DOOR SWING)

Featuring IQ-Touch™ Electronic Controls



SIGNATURE FEATURES



LARGE CAPACITY

Stores up to 30 pounds of ice cubes — and makes over 34 pounds of ice in a 24-hour period.



CRYSTAL-CLEAR ICE CUBES

Makes crystal-clear ice perfect for entertaining.



INTEGRATED CONTROLS

Controls are on the top of the door — so they're easy to set when needed, and hidden from view when the door is closed,



LOW MAINTENANCE

Has a cleaning mode and self-defrosts.

PRODUCT DIMENSIONS

Height (Adjustable) 33-3/4" - 34-3/4"

Width 14-7/8" Depth (Including Handle) 26-3/4"

MORE EASY-TO-USE FEATURES

VERSATILE INSTALLATION OPTIONS

Can be used freestanding or under-counter.

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes three year coverage on parts and one year on labor¹.

FACTORY INSTALLED DRAIN PUMP

This ice maker is easy to install, unlike some that require installation of a separate accessory drain pump kit

ECO MODE

Slows ice production and saves approximately 23% of water and electric usage.

DELAY MODE

Suspends ice production for 2, 4, 6, or 8 hours or days. Perfect during sleeping hours, or during the week for your weekend vacation home.

A.D.A. COMPLIANT

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

Available in:



(S)


Eligibility based on product registration with Electrolux North America within 60 days of purchase Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labor for 1 year.

UNDER-COUNTER ICE MAKER

UR15IM20RS (RIGHT DOOR SWING) UL15IM20RS (LEFT DOOR SWING)



Capacity	Up to 30 Lbs.
Installation Type	Built-In/Freestanding
FEATURES	
IQ-Touch™ Electronic Controls	Yes
Daily Ice Production	Over 34 Lbs.
Clear Ice Cubes	Yes
Ice Cube Size	3/4"
Ice Cubes Produced per Cycle	130
3-Step Self-Cleaning Process	Yes
Self-Cleaning of Mineral Deposits	Yes
Factory Installed Drain Pump	Yes
Frost-Free Performance	Yes
ADDITIONAL FEATURES	
Signature Soft-Arc Door and Handle Design	Yes
Luxury-Close™ Door	Yes
Adjustable Leveling Legs	4
ECO Mode	Yes
Delay Mode	Yes
Cleaning Mode	Yes
A.D.A. Compliant*	Yes
ACCESSORIES	
Ice Scoop	Included
Electrolux ICON® Handle Kit – PN# 5304503432	Optional
SPECIFICATIONS	
Color –	
Stainless Steel	S
Power Supply/Water Inlet Location	Left Bottom Rear
Voltage Rating	120V/60 Hz
Connected Load (kW Rating) @ 120 Volts [‡]	0.48
Minimum Circuit Required (Amps)	15A
Gravity Assisted Drain	Required
Shipping Weight (Approx.)	105 Lbs.
*When properly installed, this model is A.D.Aqualified based on the Unit Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Jus Standards for Accessible Design.	
For use on adequately wired 120V, dedicated circuit having 2-wire servi ground wire. Appliance must be grounded for safe operation.	ce with a separate
NOTE: Always consult local and national electric and plumbing codes. Re Installation Guide for detailed installation instructions on the web at elect	fer to Product




Height (Adjustable)	33-3/4" - 34-3/4"
Width	14-7/8"
Depth (Including Rear Extrusion)	24"
(with Door Open 90°)	37-3/4"



UNDER-COUNTER ICE MAKER

UR15IM20RS (RIGHT DOOR SWING)
UL15IM20RS (LEFT DOOR SWING)



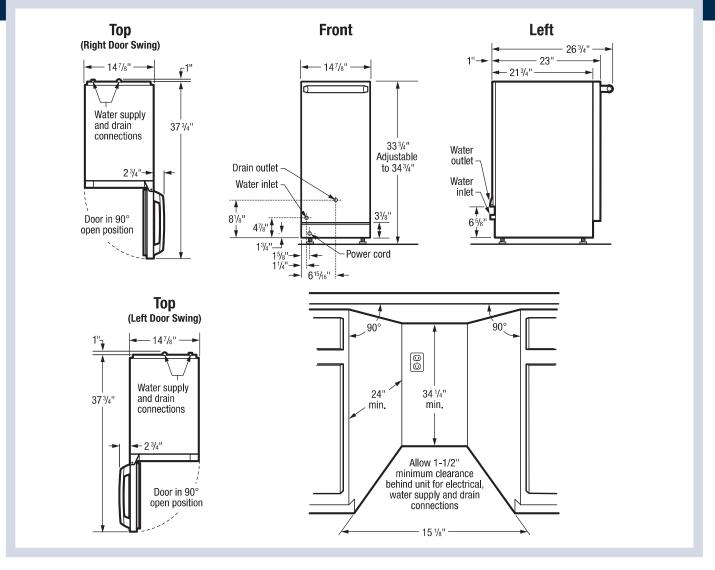

Under-Counter Ice Maker Specifications

- Product Weight 100 Lbs.
- Voltage Rating 120V/60Hz/15 Amps
- Connected Load (kW Rating) @115 Volts = 0.48 kW
 (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 1.0A
- · Electrical cable supplied.
- · Always consult local and national electric and plumbing codes.
- Unit is designed for either freestanding or built-in, under-counter installation with right or left door swing.
- Built-in, under-counter installation does not require additional airspace for top, sides or rear of unit.
- Proper built-in, under-counter installation requires that both electrical outlet and plug be completely recessed to ensure unit will fit flush against rear wall.
- To allow for ease of installation and removal, it is recommended that cabinet rough opening dimensions be increased by at least 1/4" over product's dimensions.

- For proper ventilation, unit can NOT be installed behind closed doors; front grille MUST remain unobstructed.
- Must be positioned on flat, level surface, capable of supporting entire weight when fully loaded.
- · Leveling legs supplied to adjust height and level unit.
- Do not position unit near any heat source to ensure optimum performance.
- Unit requires zero clearance when installing flush with cabinet or wall.
- When installing against cabinet or wall that extends beyond front edge of unit, 2-3/4" minimum handle clearance required to allow for 90° door swing, providing sliding shelves with necessary clearance.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Optional Accessories

• Electrolux ICON® Handle Kit - (PN# 5304503432).

