

# UBCgb3730

Undercounter Beverage Refrigerator

# LIEBHERR

## Refrigeration and Freezing



home.liebherr.com

UBCgb3730	
Energy consumption (kWh / y)	199
Estimated Yearly Energy Cost in US \$	28
Sound rating dB(A)	34
Refrigerator capacity cu.ft. (l)	4.8 (136)
Defrost type	Automatic
Electronic control	Touch
Interior light	LED ceiling light - dimmable
Number of shelves / height adjustable	3/3
Shelf material	Glass
Shelf on Telescopic rails	1 pull-out wire shelf with wood trim
Temperature range	36°F to 50°F (2°C to 10°C)
Number of temperature zones	1
FreshAir activated charcoal filter	Yes
Door alarm	Yes
Door type	Full black glass door with recessed handle
SoftSystem	No
Door hinges Right, reversible	Yes
<b>Product dimensions</b>	
in inch (H / W / D)	33 13/16 / 23 1/2 / 22 11/16
in cm (H / W / D)	85.9 / 59.7 / 57.6
<b>Cut out dimensions</b>	
in inch (H / W / D)	33 7/8 - 36 1/4 / 24 / 22
in cm (H / W / D)	86-92 / 60 / 56.5
Net weight lbs. (kg)	99.2 (45)
Voltage V / Hz	115/60



## Accessories

<b>Air Filter</b>	9882460
<b>Height-adjustable stainless-steel toe kick</b>	7742874

## Features


- Power Cooling** The fan – as powerful as it is quiet – distributes the cold air efficiently throughout the entire refrigeration compartment.
- Fresh Air** The FreshAir activated charcoal filter cleans the circulating air and quickly binds unpleasant odors.
- Touch-Display** The touch display enables easy and intuitive operation of your Liebherr. All functions are clearly arranged on the display. A gentle tap on the functions is all it takes to select them.
- Smart Device** Keep an eye on your drinks wherever you are. The beverage center can be quickly set up in a network with the SmartDeviceBox accessory. This give you all benefits of the SmartDevice app.
- Super Cool** Generates greater cold reserves so that freshly stored food can be rapidly chilled. Reversion from the chilling temperature of +35.6°F to the normal refrigeration temperature.
- Super Quiet** Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound absorbing compressors.

\* Energy Cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 14 cents per KWh.

\*\* Noise output – according to EN 60704-3

# Diagrams

## Product and Cut out Dimensions

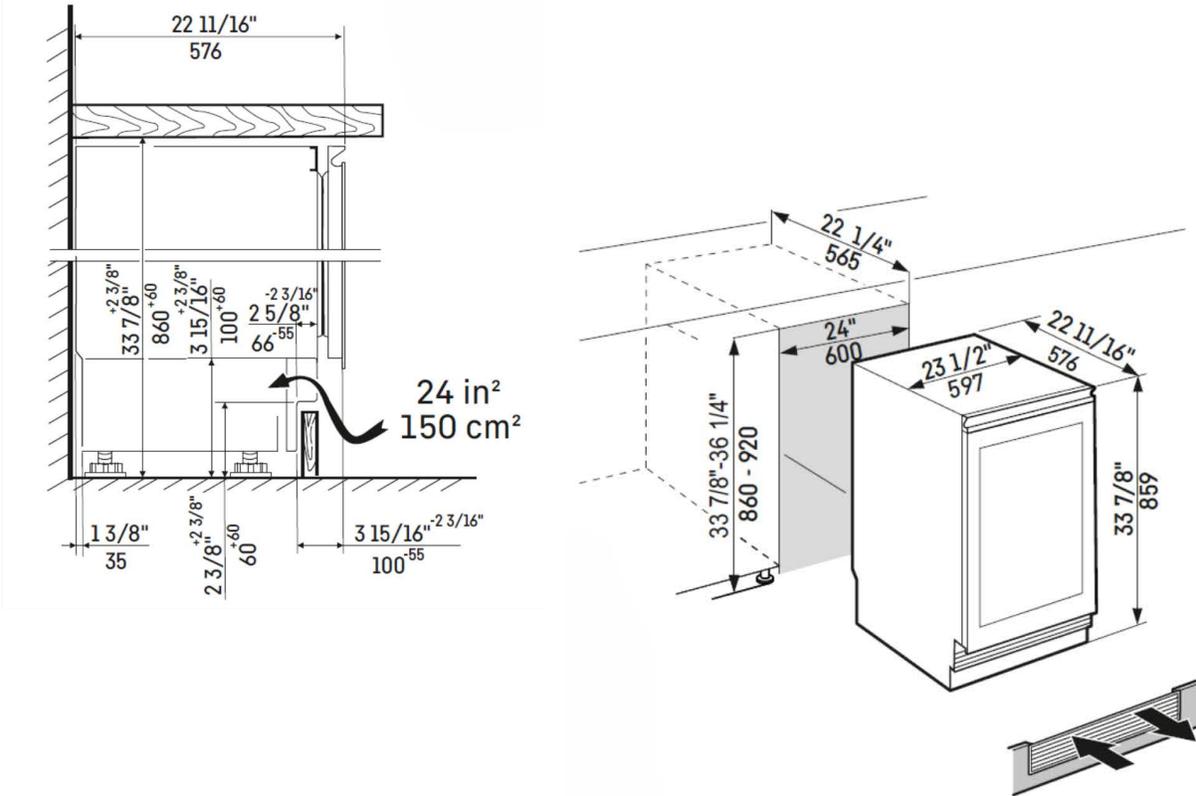

This is a built-in undercounter model which means that it is enclosed by a kitchen cabinet. This type of cabinet must be carefully constructed using the correct dimensions and it must provide suitable ventilation to ensure proper appliance operation.

The floor on which the appliance stands must be horizontal, and level and the kitchen cabinets must be aligned horizontally and vertically. The power cord exists the rear of the appliances and has a length of 6.5 ft (2m). We recommend the electrical outlet not be situated behind the appliance and be easily accessible. The under counter can be installed in a standard niche of 34" up to taller niche of 36". Height can be adjusted in a range of  $2 \frac{3}{8}''$  (60mm) by turning the leveling feet.

To ensure proper refrigeration performance of the appliance, designed ventilation is required. The toe kick installation will be different depending on the cabinets where the appliance is installed. A toe kick panel will be required to cover the gap between the ventilation grill and the floor.