


30" OVERLAY WARMING DRAWER

600 SERIES

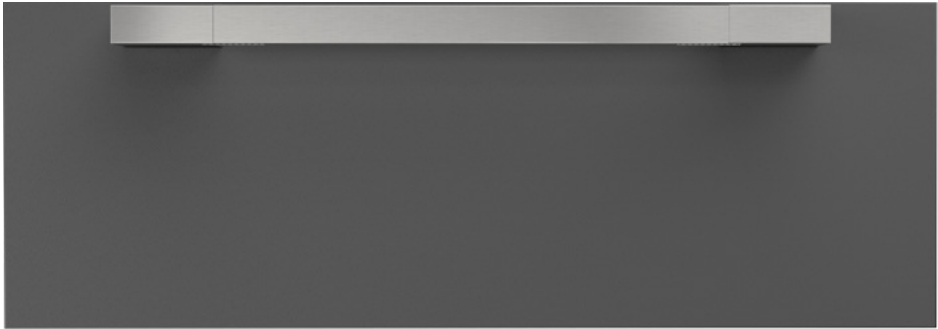

DESCRIPTION

The 600 series 30” pull-to-open panel warming drawer (requires handle), equipped with a soft-closing mechanism, offers unmatched versatility for modern kitchens. Featuring a unique true convection design, this practical appliance goes beyond just warming—it also excels at slow cooking, proofing, dehydrating, and defrosting, all within a compact, fully enclosed space. The convection fan ensures even heat distribution, keeping your side dishes, pies, and bread at the perfect temperature from top to bottom. Whether you’re prepping or serving, this warming drawer is the ultimate kitchen companion.

FEATURES

Knob Control
Overlay panel installation
Pull-to open and Push-to-close
Soft Closing
Heavy Duty full extension rails
True convection heating system
Even heat distribution
All stainless steel structure
Warming Temperature range: min. 90 °F up to 195 °F;
min. 30 °C up to 90 °C
2 Internal lights
Handle and overlay panel not included

FUNCTIONS

Pre-heat dishes
Pre-heat coffee cups
Keep warm ready food
Defrosting
Leavening dough
Slow cooking min. 90 °F up to 195 °F
min. 30 °C up to 90 °C


MODEL CODE

F6IWD3001

- Keep Warm
- Defrost
- Proofing
- Slow Cooking
- Sliding Telescopic Rails
- Soft Closing
- Americans with Disabilities Act †

30" OVERLAY WARMING DRAWER

600 SERIES

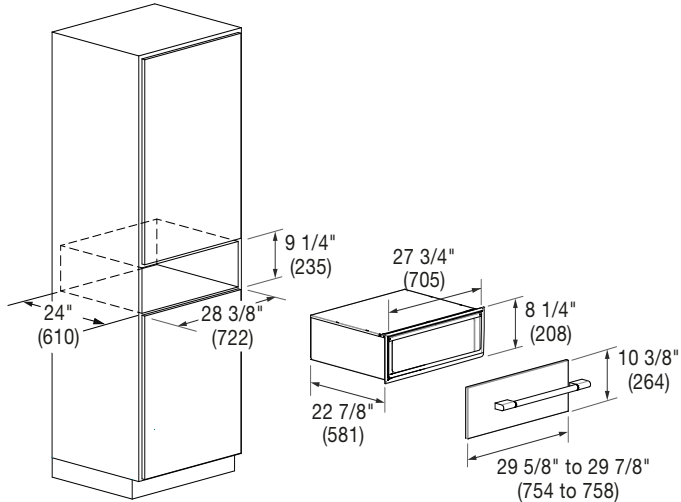

MODEL CODE	30" WARMING DRAWER F6IWD3001	
GENERAL DETAILS		
Finish	Overlay	
Close/Open Mechanism	Pull-to-open and Push-to-close	
Drawer Material	Stainless Steel	
Compatible Ovens	F7MSP30S1-F7MDP30S1 - F7MSCO30S1- F7MSPD30S1 - F4MSP30S1	
Temperature (max), °F (°C)	195	(90)
Thermostat, °F (°C)	90 - 195	(30 - 90)
Interior Lights	2 x 20 W Halogen	
CAPACITY		
Volume (each), cu. ft. (L)	1.9	(53.3)
Useable Width, in. (mm)	24-3/8	(620)
Useable Height, in. (mm)	7-7/8	(200)
Useable Depth, in. (mm)	16-7/8	(430)
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	29-5/8	(754)
Product Height, in. (mm)	10-3/8	(264)
Product Depth, in. (mm)	22-7/8	(581)
Cutout Width, in. (mm)	28-3/8	(722)
Cutout Height (min), in. (mm)	9 1/4	(235)
Cutout Depth (min), in. (mm)	24	(610)
Net Weight, lbs. (kg)	67.2	(30.5)
POWER / RATINGS		
Max power absorbed (W)	1100 W	
Power V (Hz)	120	(60)
Power Cable	NEMA 5-15P	
Power Cable Lenght, in. (mm)	86 5/8	(2200)
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.