




## Model Number: CWEH6-K42


Special Notes: LED GU10 lighting. This model is not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes.

## WALL MOUNTED SPECIFICATIONS


|           |         |
|-----------|---------|
| WIDTH:    | 42"     |
| DEPTH:    | 19 1/2" |
| HEIGHT:   | 6"      |
| CFM:      | 250     |
| SONES:    | 7.4     |
| AMPS:     | 3.5     |
| # LIGHTS: | 3       |

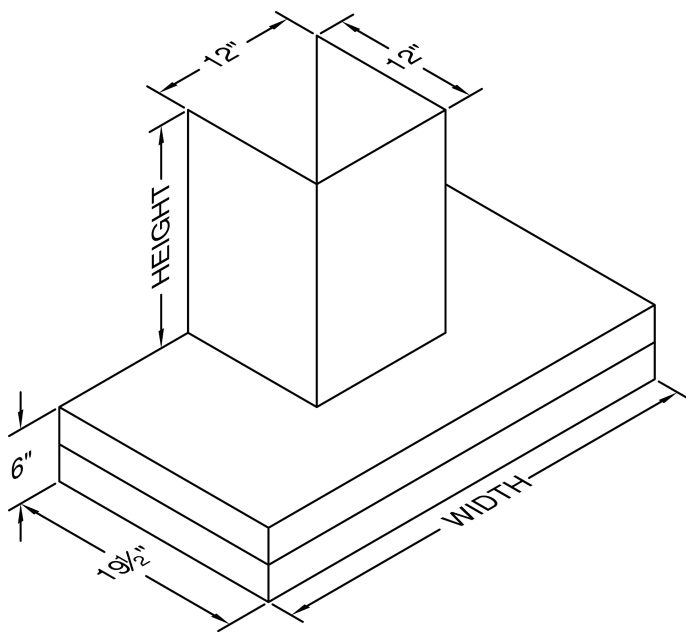


The VP521 transition is available for top vent applications at an additional charge.



### CONNECTION DIAGRAM

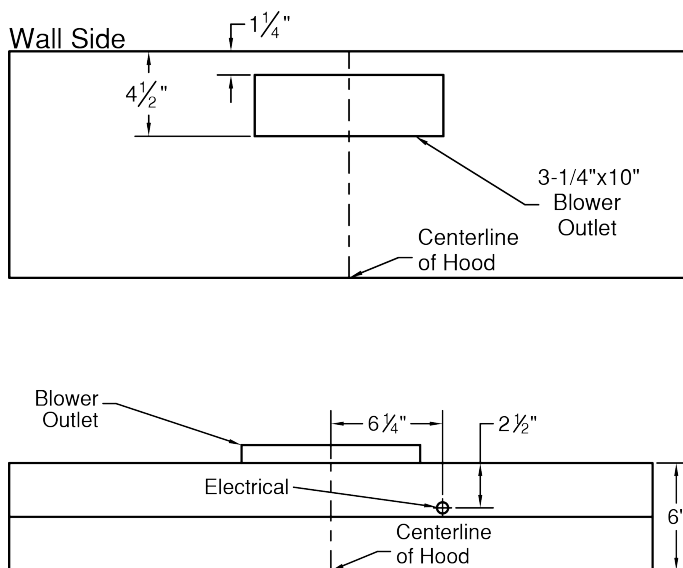

### REC. MOUNTING HEIGHT\*

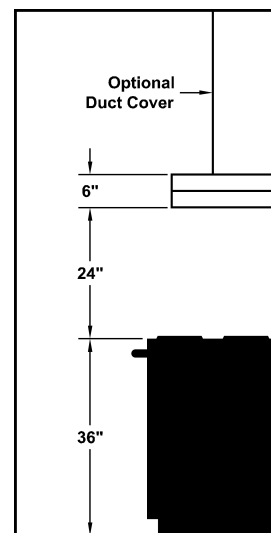

\* Exceeding recommended mounting height may compromise performance.

### ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

| MODEL           | VOLTS | AMPS+ | HZ | RPM  | CFM SP@0.0" | EQUIV CFM\$ | CFM SP@0.1" | CFM SP@0.2" | CFM SP@0.3" | MIN. ROUND DUCT SIZE | SONES# |
|-----------------|-------|-------|----|------|-------------|-------------|-------------|-------------|-------------|----------------------|--------|
| K250 (Top Vent) | 115   | 3.5   | 60 | 1550 | 250         | 375         | 223         | 220         | 190         | 7" (38 sq. in.)      | 7.4    |

+ This model is equipped with LED GU10 lighting: (2 lights: 30" - 41", 3 lights: 42" - 48").

\$ Because the Power Lung®8482; blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Power Lung®8482; blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Power Lung®8482; with other blower units made by other manufacturers, use the "Equivalent CFM".

# Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.