Color Variants
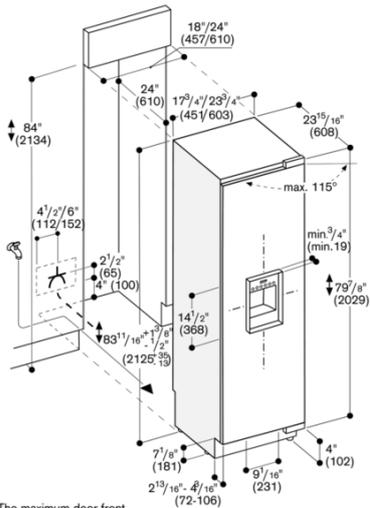
RF463702
Fully integrated appliance
Width 24" (61 cm)

Optional accessories

RA450000
Mechanical particle filter

RA450010
Activated charcoal filter for water filter system including saturation indicator

Required installation accessories

RA460010
Additional side heating element

Installation Accessories

RA422610
Stainless steel door panel with handle

RA425110
Long stainless steel door handle

RA460020
Connecting element for vertically split appliance fronts (for a flush front)

RA460040
Finger protection for extra long furniture fronts

RA461614
Ventilation grill, stainless steel

RF463702
Freezer column
Fully integrated appliance
Width 24" (61 cm)
Right-hinged

Width 24" (61 cm)
Fully integrated appliance
Stainless steel interior
Integrated automatic ice maker with fixed water connection
Illuminated dispenser for ice cubes, crushed ice and chilled water
Solid aluminum door bins
Net volume 11.3 cu.ft.
ENERGY STAR® qualified

Operation
Electronic precision temperature control with digital temperature display.

Technical features
Dynamic cool air distribution with Multi-Flow Air System.
Automatic defrosting with defrost water evaporation.
Energy-saving vacation mode.
Open-door and malfunction warning system.

Freezer compartment
No-frost technology with fast freezing.
Temperature adjustable from 7 °F to -9 °F (-14 °C to -25 °C).
4 solid metal shelves, two of which are manually adjustable.
2 fully extendable drawers with transparent front, one of which is large, one is regular.
Bright interior lighting with LED sidewall pillars.
One gallon door bin.
1 door bin with transparent front flap.

Ice and water dispenser
Illuminated ice and water dispenser.
Integrated, with fixed water connection.
Ice maker can be switched off independently.
Ice cube production approx. 4.2 lb (1.9 kg)/24 h.
Ice cubes and crushed ice.
Removable ice storage bin with approx. 6.6 lb (3 kg) capacity.
Chilled water supply approximately 1.3 quarts.

Planning notes
Flat hinge.
Door opening angle of 115°, optional 90° door stop.
Max. door panel weight 126 lb.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 116 psi, connect pressure relief valve between water tap and hose set.
Cold water connection required.
Electrical location 6" above ground in lower left corner of unit.
Water pressure 29 to 116 psi.

Consumption data
Energy consumption 1.353 kwh/24 h.
Energy consumption 493.85 kwh/year.
Noise level 39 dB.

Rating
Total rating 0.565 kW.
Total Amps: 10 A.
120 V / 60 Hz
Connecting cable 139 1/3" with plug.
Supply hose 118" with 3/4" connection.

Product Features

Multi-Flow Air Tower
Yes

Number of compressors
1

Number of independent cooling systems
1

Eco Mode
Yes

SUPERFREEZE
Yes

Number of Door Bins - Freezer
2

Adjustable Door Bins - Freezer
No

Tilt-Out Door Bins - Freezer
Yes

Number of Shelves - Freezer
2

Adjustable Door Bins - Freezer
No

Shelf Material - Freezer
Metal

Door Hinge
Right

Reversible Door Hinge
No

Consumption and connection features

UPC code
825225803126

Variant color

Panel ready

Installation Type
N/A

Silence level (dBA)
39

Watts (W)
565

Current (A)
10

Volts (V)
120

Frequency (Hz)
60

Total annual energy consumption (kWh)
493.8

Energy Star® qualified
Yes

Approval certificates
ETL, ETL C

Power Cord Length
139 1/3"

Plug type
120V-3 prong

Appliance dimensions (h x w x d) inch
83 3/4 " x 23 3/4 " x 24"

Required cutout size (HxWxD) (in)
x 84" x 23 3/4 "

Appliance Width (in)
23 3/4 "

Height (in)
83 3/4 "

Depth (in)
24"

Product packaging dimensions (HxWxD) (in)
88.97 x 27.55 x 29.52

Total unit gross capacity (cu. ft.) - AHAM
11

Net weight (lbs)
349

Gross weight (lbs)
381

GAGGENAU

RF463702

Freezer column

Fully integrated appliance

Width 24" (61 cm)

Right-hinged

2017-08-24
Page 2

The maximum door front
measurements are designed for a gap measurement of 3 mm.

Wall clearance RB 472/RC/RF/RW

Niche width

C	D	E1	E2
18" (457 mm)	20¹¹/₁₆" (525 mm)	9¼" (235 mm)	10⁷/₁₆" (265 mm)
24" (610 mm)	26⁵/₈" (677 mm)	11¾" (299 mm)	13" (330 mm)
30" (762 mm)	32¹¹/₁₆" (830 mm)	14⁵/₁₆" (363 mm)	15⁹/₁₆" (395 mm)

The drawing is based on a cabinet panel width of ³/₄" (19 mm) and a
Gaggenau cabinet handle height of 1⁹/₁₆" (49 mm).

GAGGENAU