
Chairman™

Seating Capacity	. 6 Adults	(A-1-00A
Dimensions		0
Corner Radius	(234 cm x 234 cm x 90 cm)	4
Dry Weight		0 0 0
Filled Weight (Average Fill)	4 260 lbs (1 933 kg)	
Water Capacity (Average Fill)	. 400 US gallons (1,514 Liters)	
Shipping Weight	. 920 lbs (418 kg)	9 6
Export Shipping Weight:	. 970 lbs (440 kg)	
Electronic Controls	.D1 Hub™ LCD full color control panel; access to	P1 646 0 4 A B
	control jets, temperature, settings and maintenance schedule	0
Pump 1	. North America (60 Hz): 2-Speed, 4.0 HP break,	
rump i	2.5 HP continuous 48 Frame	
Export (50 Hz):	. 1-Speed, 2.0 HP continuous	
Pump 2	. North America (60 Hz): 1-Speed, 3.6 HP break,	
Export (50 Hz):	2.5 HP continuous, 48 Frame	Optional
Export (50 Hz):	. 1-Speed, 2.0 HP continuous	
Circulation Pump	. Yes	escutcheon jets
Fountain Pump	. Yes . 24/7 Filtration (Purge Cycles 2 x 10 minutes)	
Total VCR Jets	.24/7 Filitiation (Furge Cycles 2 X To minutes)	
Seat 1 UltraLounge Jets	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Γ	Directional, 2 Mini Storm Rotator.
3	4 Power Storm Directional, 2 Mini Storm Directional, 4 . 1 Power Storm Rotator	Pillow Mini Directional
Seat 2 Jets	.1 Power Storm Rotator	
Seat 3 Jets	. 1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower D	Directional, 1 Power Storm
Seat 4 Jets	Rotator, / Mini Storm Rotator	
Soat 5 May Thorany Soat lots	.1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 4 Power Storm	
• •	Directional 8 Mini Storm Potator (6 on sidewalls)	Directional, 41 ower Storm
Seat 6 Jets	.1 Power Storm Multi Port	
Footwell (7)		
Massage Selectors	.2	
Special Features	. Tactile Therapy, Spa Status Light, 3 Flex Therapy Pillo	ow, UltraLounge, Max Therapy
Water Management System	Seat, Dynamic Massage Sequencer, Aux Control . UltraPure System; Two 75 ft filter cartridge; 8" Weir	
LED Lighting	Liquid FX	
Optional	. Exterior Lights	
Synthetic Cabinet Colors	. Adobe Tan, Stoneridge Grey, Mayan Brown	
Terracina Cabinet (Optional)	. Driftwood, Cherry, Summer Pine, Vintage Cedar, Midn	night Maple
	. Moonstone, UltraLife, Sand, Sunstone, Smoked Marbl	le, Blue Topaz, Gray Marble,
Headrests	Desert Stone	
	. Some therapy Fillow . Fountain with independent flow rate (on or off) adjustn	ment: nowered by the fountain
vater i cature		non, portored by the lountain
Heater	. 2.1, 3.4, 5.5 kW	
Export (50Hz)		
Electrical Requirements:	. North America (60 Hz): 240 VAC@30A, 40A or 50A	404
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x breaker to comply with local electrical codes. Cert	
	power inputs	ani countries may require dual
Warrantv*	North America (60 Hz): Lifetime for UltraLife Shell Sur	face. 7 Years Acrylic Shell
	Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect	
	Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for	
	Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo;	
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Flumbing 5 Years Equipment and Controls 5 Years for EnviroTest	
	5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System,	
	2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2	Years Lights. 1 Year Stereo
Audio System (Optional)	. Fully Integrated Stereo System with Bluetooth capabil	
	subwoofer	-
Wi-Fi (Optional)	.D1 Connect App	

^{*(}See Warranty Document for Specific Details)

Chairman

Massage Selector Diagram

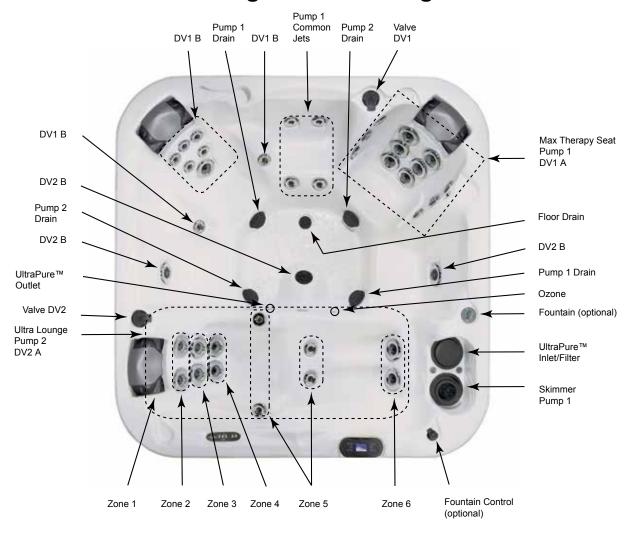

DV1 A = Diverter Valve 1 (A position Clockwise)

DV1 B = Diverter Valve 1 (B Position Counter Clockwise)

DV1 C = Diverter Valve 1 (Neutral Position)

DV2 A = Diverter Valve 2 (A position Clockwise)

DV2 B = Diverter Valve 2 (B position Counter Clockwise)

Spa Operation Subject to Change without Notice

Seat Depths

1 = 25.00" (63.50 cm) 7 = 32

m) 7 = 32.00" (81.28 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5"


(1.27 cm).

2 = 27.00" (68.58 cm) 3 = 28.00" (71.12 cm) 4 = 21.00" (53.34 cm) 5 = 30.00" (76.20 cm) 6 = 26.00" (66.04 cm)



Chairman

Jet Designation

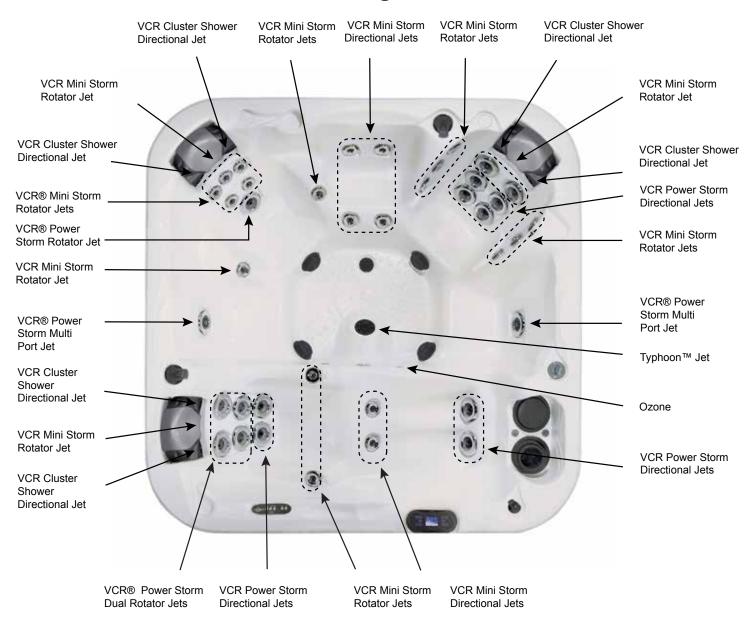

Dimensions/Operation/Specifications are Subject to Change Without Notice

48 Total Jets



Mini Storm Rotator (6)



Mini Storm Directional (15)



Power Storm Rotator (3)

Total Jets



Power Storm Dual Rotator (4)



Power Storm Directional (8)






Flex Therapy Pillow (3)





Chairman

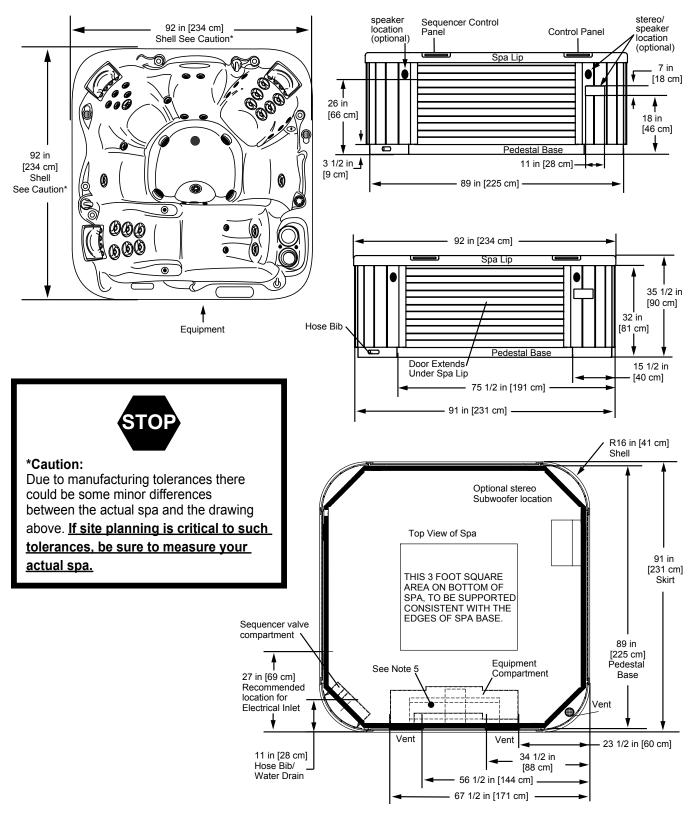

Note: 1. Subject to change without notice.

- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
- 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out). Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).