


---

# INSTALLATION INSTRUCTIONS

---

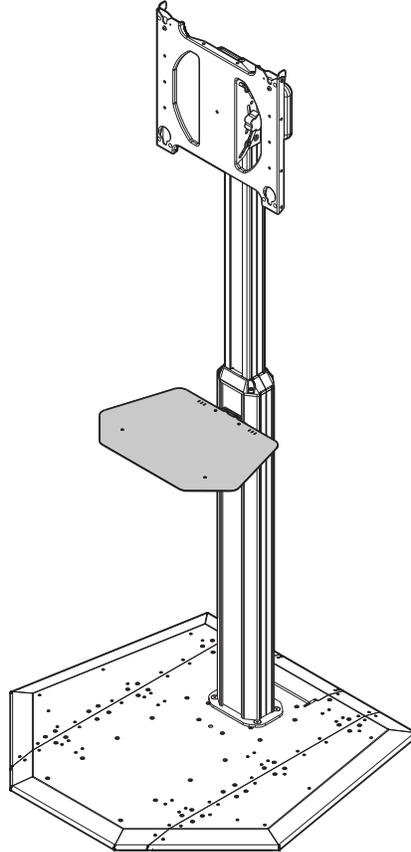

---

## PRSU Shelf Accessory

---

## DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

## DEFINITIONS

**MOUNTING SYSTEM:** A MOUNTING SYSTEM is the primary Chief product to which an accessory and/or component is attached.

**ACCESSORY:** AN ACCESSORY is the secondary Chief product which is attached to a primary Chief product, and may have a component attached or setting on it.

**COMPONENT:** A COMPONENT is an audiovisual item designed to be attached or resting on an accessory or mounting system such as a video camera, CPU, screen, display, projector, etc.



**WARNING:** A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



**CAUTION:** A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



## IMPORTANT SAFETY INSTRUCTIONS



**WARNING:** Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all accessories are properly assembled and installed using the instructions provided.



**WARNING:** Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components located on the PAC910 does not exceed 25 lbs (11.34 kg).



**WARNING:** Use of this accessory will decrease the weight capacity of the mounting system to which it is attached by the combined weight of the accessory and all components supported by this accessory. See Figure A for reference.

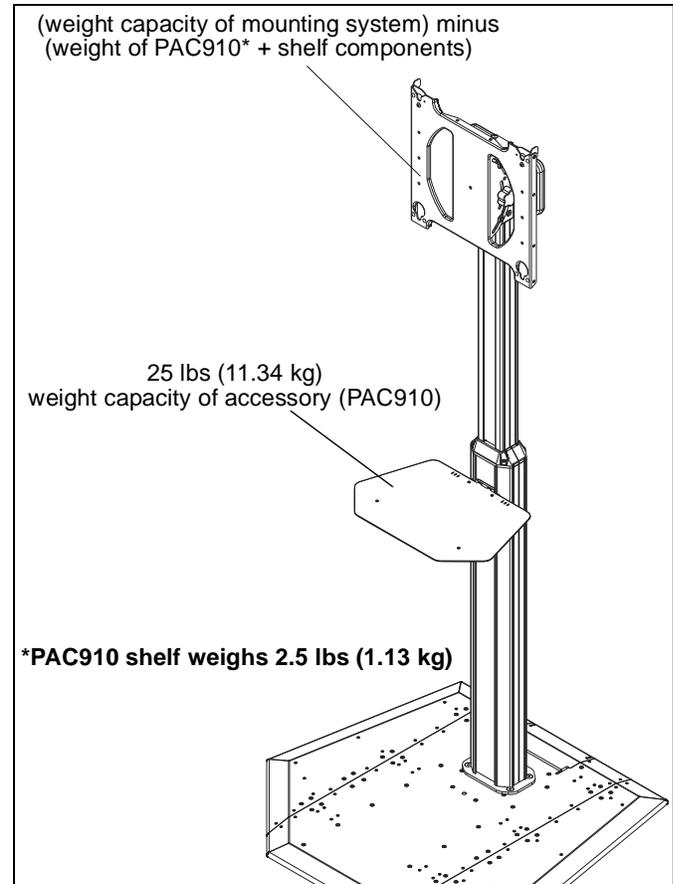


Figure A



**WARNING:** Use this accessory only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.



**WARNING:** Never operate this accessory if it is damaged. Return the accessory to a service center for examination and repair.



**WARNING:** Do not use this product outdoors.




**WARNING:** RISK OF INJURY TO PERSONS! Do not place video equipment such as televisions or computer monitors on shelf.

**NOTE:** The PAC910 shelf is compatible with the following models:


- PRSU

**--SAVE THESE INSTRUCTIONS--**

### DIMENSIONS

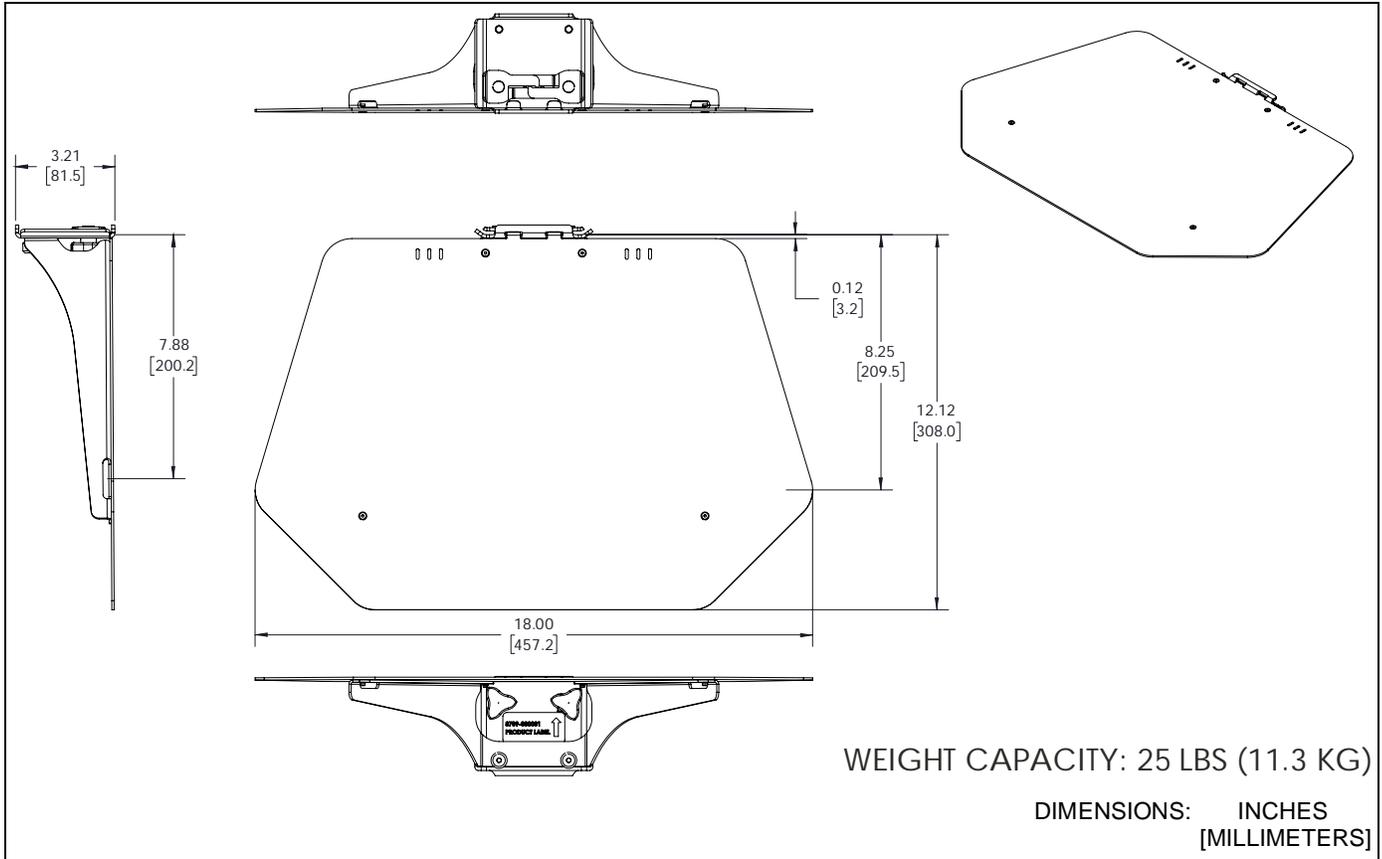

### PARTS

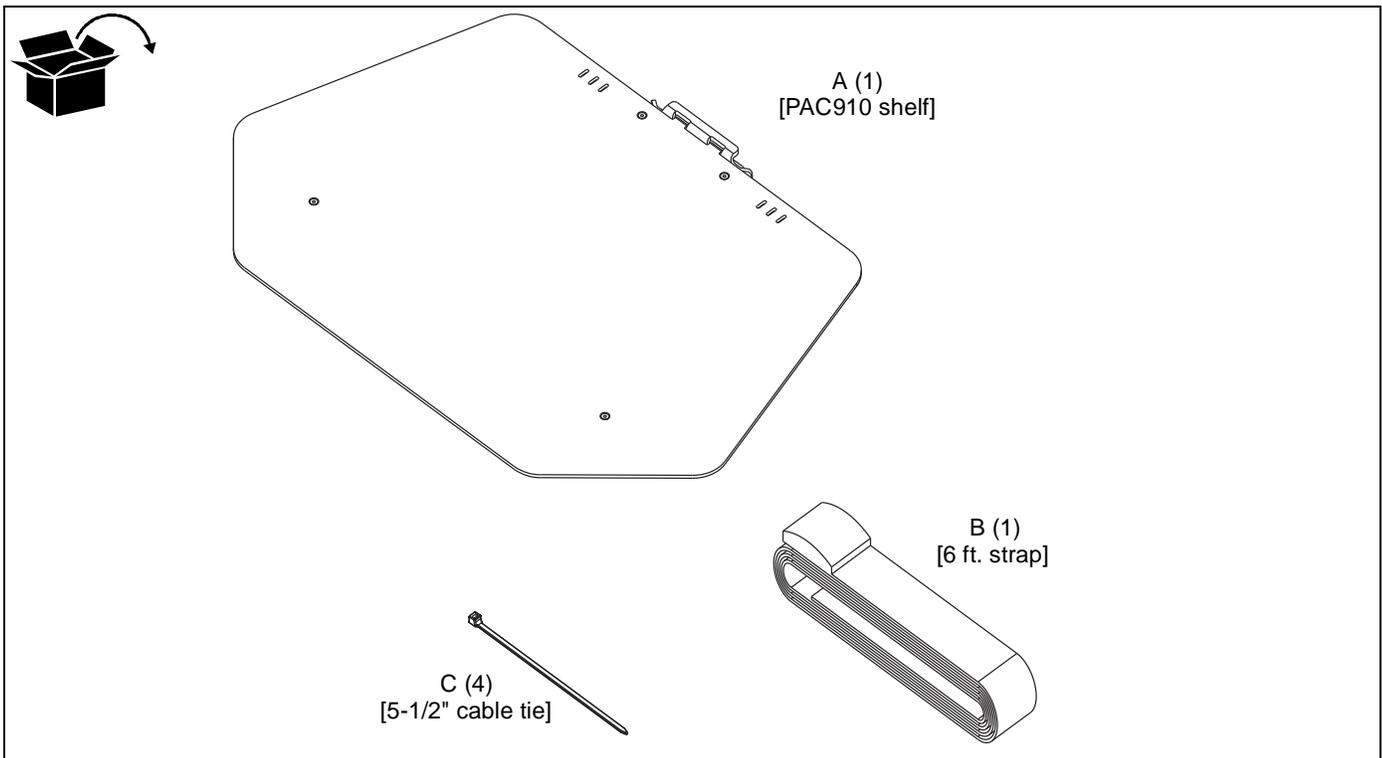

## INSTALLATION



**WARNING:** IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! DO NOT substitute hardware! Use only hardware provided by manufacturer.



**WARNING:** Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components located on the PAC910 does not exceed 25 lbs (11.34 kg).

**IMPORTANT ! :** The PAC910 is designed to be mounted onto the PRSU Series stand.

### Shelf Installation

1. Loosen thumb nuts on bracket beneath PAC910 shelf (A). (See Figure 2)

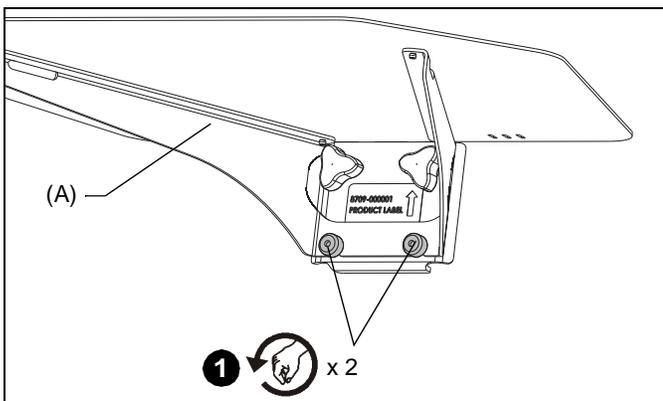


Figure 1

2. Remove bracket assembly from back of PAC910 shelf by sliding downward and away from shelf. (See Figure 2)

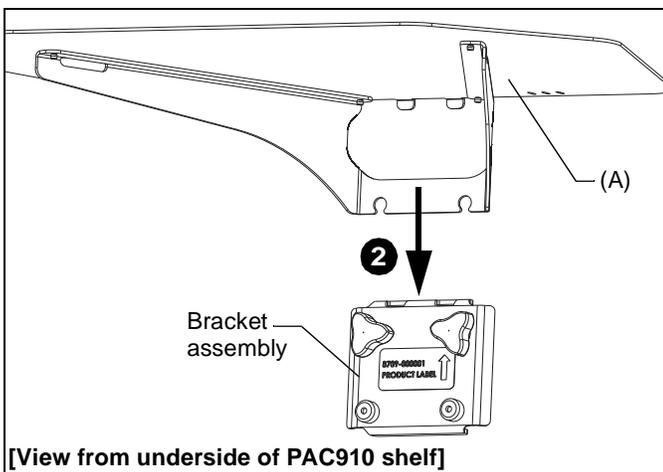


Figure 2

3. Thoroughly loosen, but do NOT remove, knobs on bracket assembly. (See Figure 3)

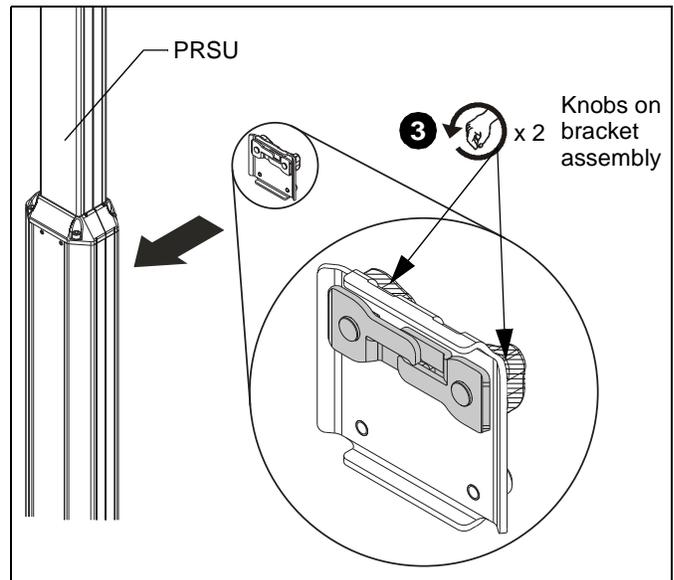


Figure 3

**NOTE:** It is important to attach the bracket assembly in the order noted in Steps 4 - 6. Ensure that knobs are thoroughly loosened.

4. Attach LEFT SIDE of bracket assembly to PRSU column by ensuring that back of bracket is inserted into edge of column and front of bracket rests against front of PRSU column. (See Figure 4)

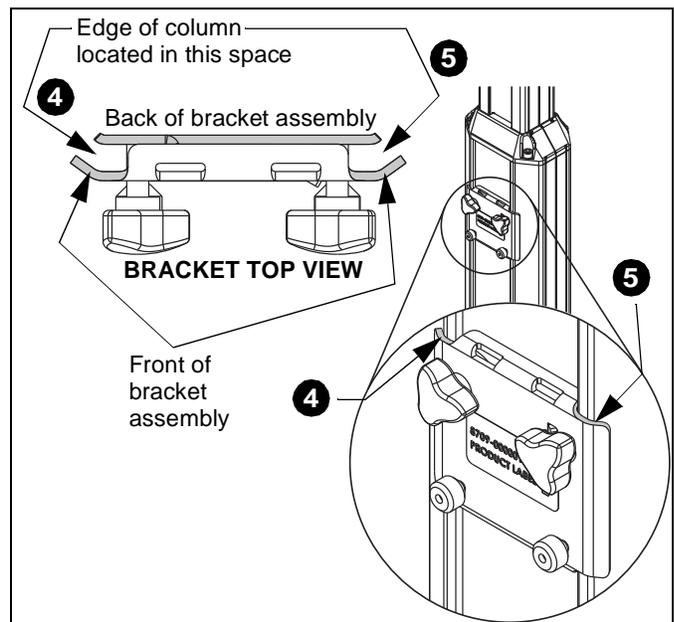


Figure 4

5. Attach RIGHT SIDE of bracket assembly to PRSU column by shifting right back bracket and right knob, as necessary, to allow tight attachment. (See Figure 4)
6. Be sure that **RIGHT** knob is shifted all the way to right, and then tighten **RIGHT knob FIRST**, followed by **LEFT knob** to complete attachment of shelf bracket. (See Figure 4)

7. Lower shelf from above the bracket assembly, hooking two tabs on back of shelf into two slots in top of bracket assembly. (See Figure 5)
8. Tighten thumb nuts in bracket assembly to complete installation of the shelf to the PRSU column.

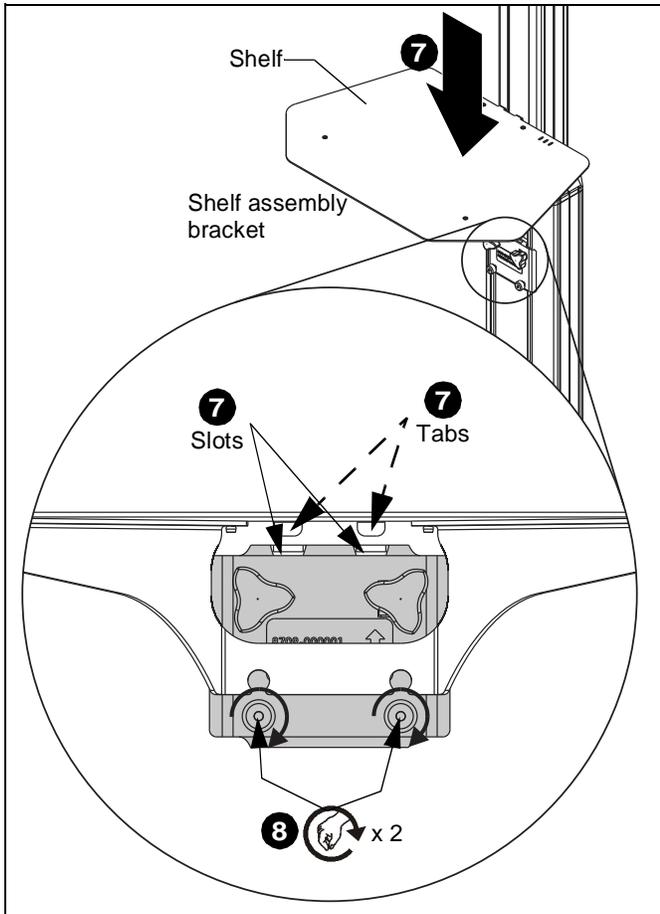


Figure 5



**CAUTION:** This shelf is intended for use with components weighing not more than 25 lbs (11.34 kg) and having dimensions that will permit it to sit evenly on this shelf. Use with other equipment may result in instability causing possible injury.

### Installing Safety Strap

1. Place equipment on shelf (A).
2. Thread strap (B) through slots on underside of shelf (A). (See Figure 6)

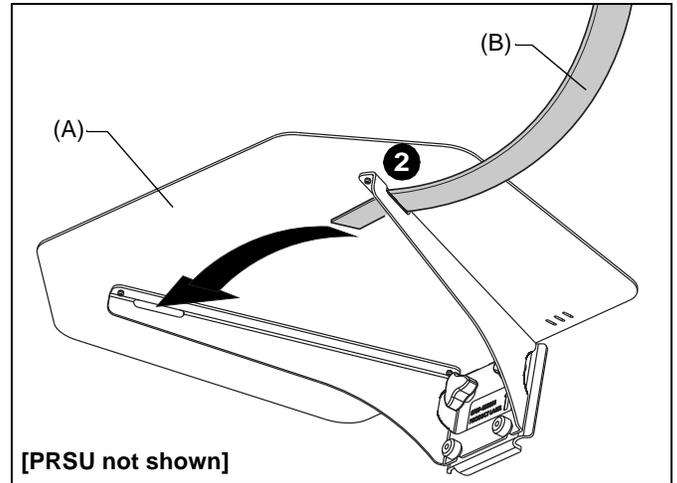


Figure 6

3. Loop strap (B) over top of equipment and slide strap end into clasp. (See Figure 7)

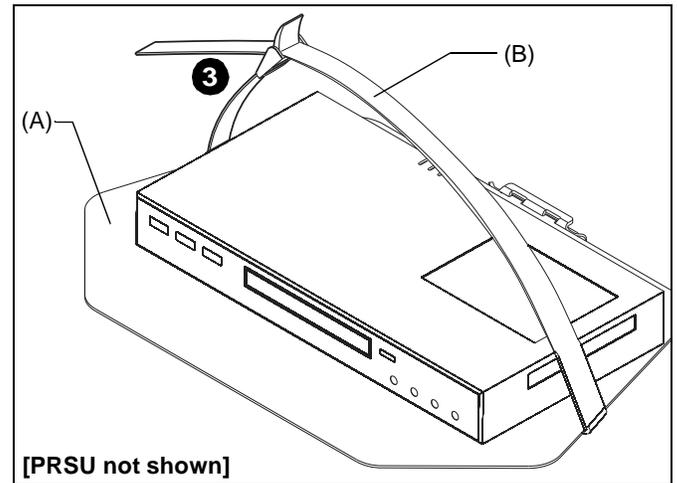


Figure 7

4. Pull strap (B) until tight around equipment and press clasp closed to secure. (See Figure 8)

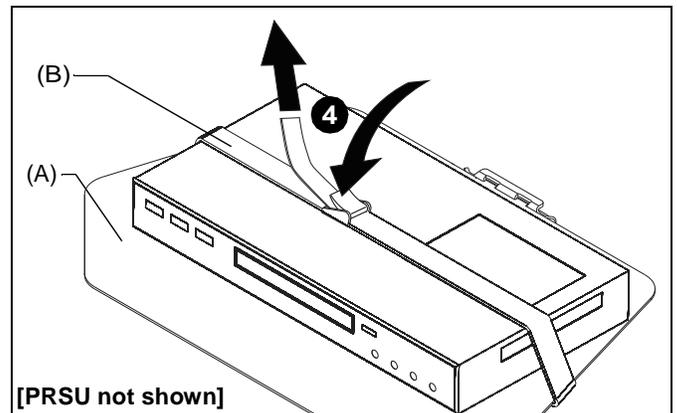
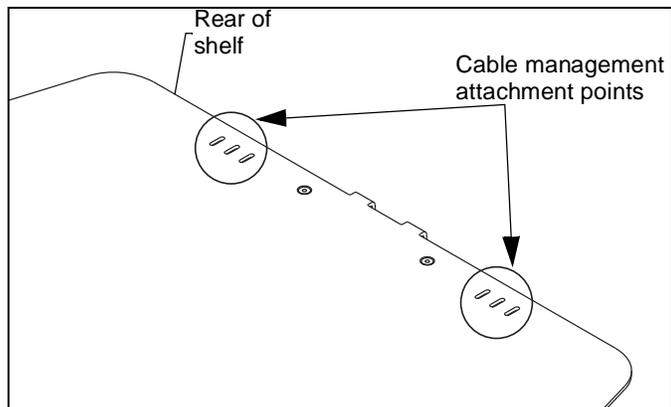


Figure 8

## Cable Management

1. Follow cable management instructions included in the PRSU installation instructions.
2. There are also attachment points on the back of the PAC910 that allow further cable management using the included zip ties (C). (See Figure 9)



**Figure 9**





Our Mounts. **Your Vision.**

Chief, a products division of  
Milestone AV Technologies

8800-002983 Rev00  
©2017 Milestone AV Technologies  
[www.milestone.com](http://www.milestone.com)  
07/17

<b>USA/International</b>	<b>A</b> 6436 City West Parkway, Eden Prairie, MN 55344 <b>P</b> 800.582.6480 / 952.225.6000 <b>F</b> 877.894.6918 / 952.894.6918
<b>Europe</b>	<b>A</b> Franklinstraat 14, 6003 DK Weert, Netherlands <b>P</b> +31 (0) 495 580 852 <b>F</b> +31 (0) 495 580 845
<b>Asia Pacific</b>	<b>A</b> Office No. 918 on 9/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong <b>P</b> 852 2145 4099 <b>F</b> 852 2145 4477

