


ASSEMBLY INSTRUCTIONS

CROWNMARK
MODEL: B4850BK/B4850WH-91
BASE & TOP
DRESSING TABLE

(Box 1)
 BOX OF DRESSING TABLE

No	ITEM	Qty
A	Center Dressing Table 	1 pc
B	Side Dressing Table (L) 	1 pc
C	Side Dressing Table (R) 	1 pc
D	Dressing Table Bottom Back Panel 	1 pc

(Box 2)
 BOX OF DRESSING TABLE GLASS

No	ITEM	Qty
E	Dressing Table Top Glass 	1 pc


(Box 1)
 HARDWARE LIST(N.STAND & CHESSER)

No	ITEM	Qty
1	Flat Head Chipboard Screw m4x32mm Blk 	7 pcs
2	JCN Nut m6x12mm Rbw 	4 pcs
3	Allen Key m4x65mm Blk 	1 pc
4	JCBC Bolt m6x30mm Blk 	4 pcs
5	Spring Washer 1/4" Rbw 	4 pcs
6	Flat Washer 1/4"IDx19mmOD Blk 	4 pcs
7	Wood Dowel 8mmx20mm 	4 pcs
8	Handle(Top Drawer Only) 	3 pcs
9	Truss Head Machine Screw m4x35mm Blk 	3 pcs
10	Door Bubble D7mmx1.5mm Transparent 	

STEP 1 : Insert dowel (7) to Center Dressing Table (A) as shown and push together Dressing Table (B) & (C) with JCN Nut (2), JCBC Bolt (4) Spring Washer (5), Flat Washer (6) and tighten them by using Allen key (3). (Please Do Not Fully Tighten within this steps).


STEP 2 : Repeat same steps for the next Side Dressing Table Right (C) assembly.

WARNING! : Need two Peoples for assembly process.

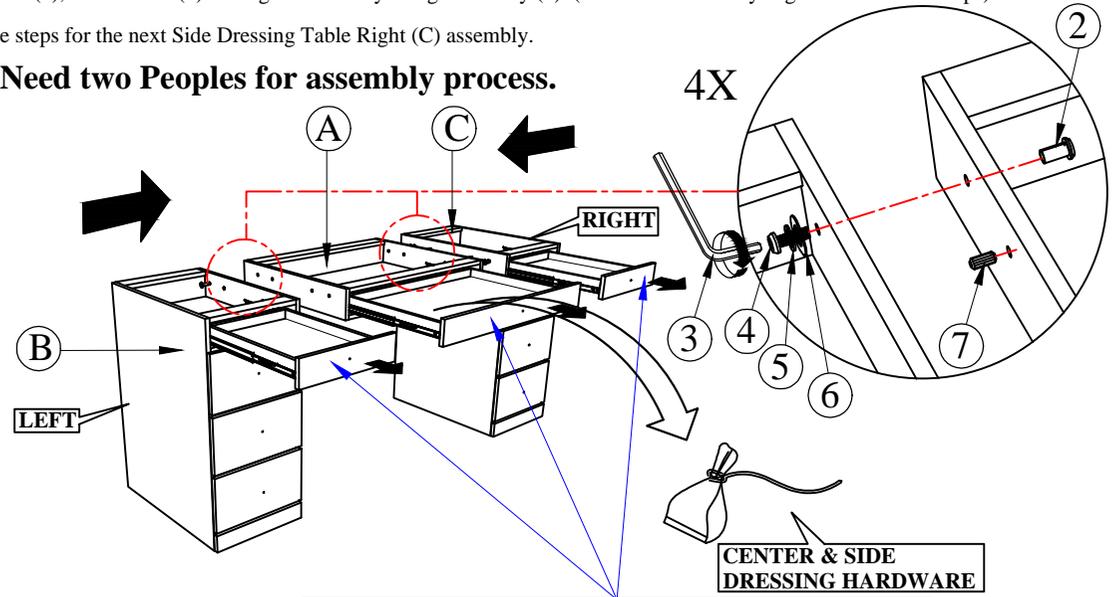



REMARK : PULL OUT THE DRAWER BEFORE ASSEMBLY

STEP 3 : Assemble the Dressing Table Bottom (D) at the back of Dressing Table with CSK Screw (1) and tighten them by using Screw Driver. (NOT PROVIDED)

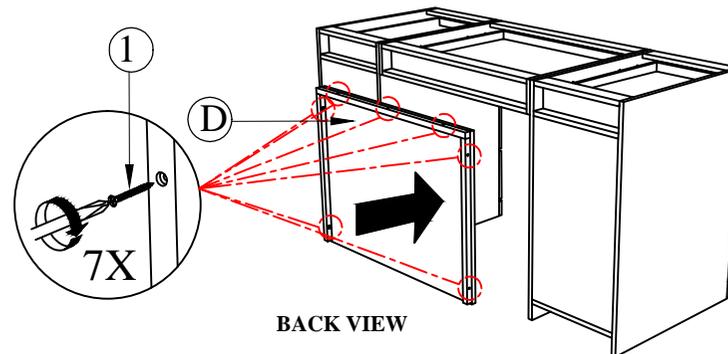


ASSEMBLY INSTRUCTIONS


STEP 4: Take out the plastic hardware pack from Center Dressing Table (A) and assemble the Handle (8) with handle screw (9) as shown on a diagram.

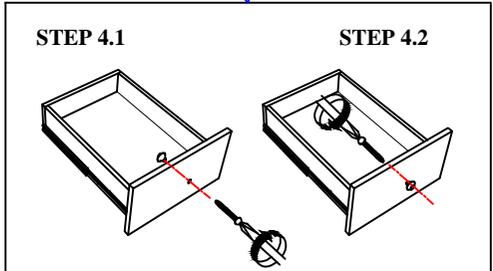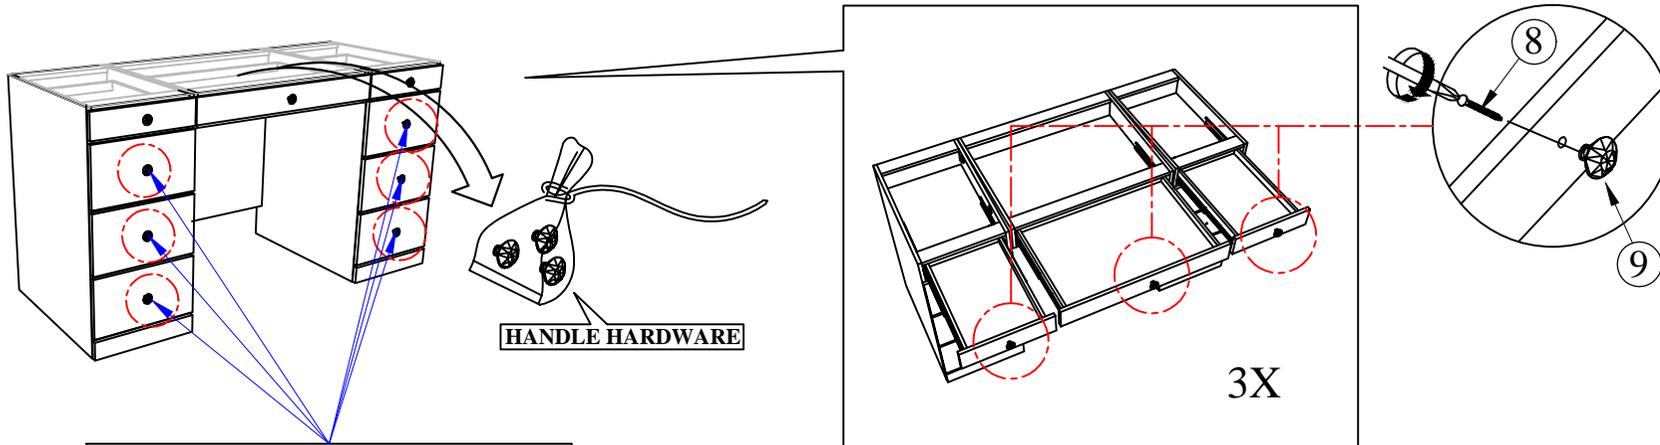

STEP 6: Put the Dressing Top Glass (E) gently on the Door Bubble as shown.
WARNING! : Need two Peoples to place the top glass.

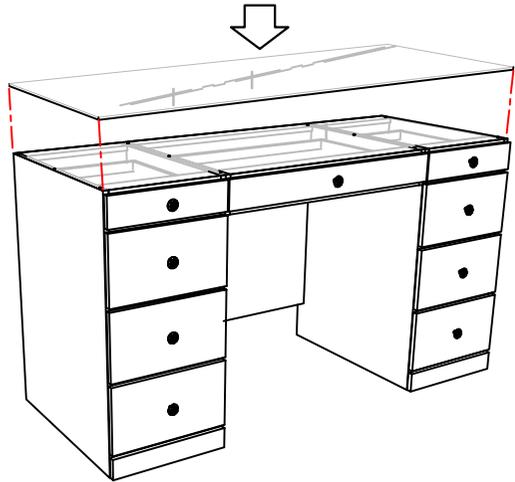

STEP 5: Paste Door Bubble Sticker on top of L & R Side Dressing Table and Center Dressing Table as shown.

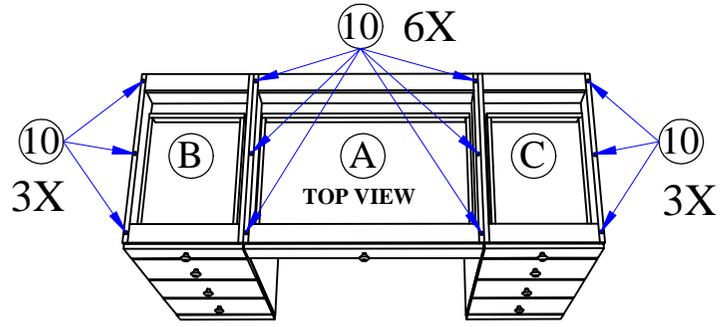

COMPLETE ASSEMBLY