



M-CR611

NETWORK CD RECEIVER WITH AIRPLAY®, SPOTIFY®,
BLUETOOTH® AND INTERNET RADIO



Fill your favorite room with superb sound quality with the Marantz M-CR611 Network CD Receiver which features a broad range of listening options, including network streaming music as well as listening to your favorite free internet radio stations via the built-in vTuner service, it also allows playback of music libraries stored on a NAS (Network Attached Storage) or a computer. It's equipped with a built-in AM/FM radio tuner, along with a CD player that's compatible with CD-R and CD-RW media, support for AirPlay® allows you to enjoy music wirelessly from your iPod touch®, iPhone®, or iPad® in high sound quality. The M-CR611 also supports ALAC, as well as 192kHz / 24bit high-resolution WAV, FLAC, AIFF files, 2.8MHz DSD file and Gapless playback. Designed with ease of use in mind, the M-CR611 features a simple "one-push" Wi-Fi connect button. The addition of Bluetooth boasts connectivity options even further, and if the Bluetooth device has NFC™ function, you can easily pair it by touching it to the N mark. An iDevice can be connected via a front facing USB Port, or an extra rear port for added convenience. There are also 2 digital inputs for a connection to a TV. An additional new feature is the speaker A / B configuration, allowing individual volume control for A and B, or master volume control for A and B. Use the M-CR611 not just to fill one room with music, but two. The M-CR611 has been designed to grace your listening space with Marantz tradition and distinction, and it is equipped with a luxurious rich black front panel design that features a wide angle easy-to-read OLED multi-line display and front color illumination that can be changed to white, blue, green or orange.

us.marantz.com



Made for
iPod iPhone



PANDORA®



Main Features

- 60W x 2ch (6 ohms)
- 4 x 30W for speaker A/B with individual volume setting
- Marantz Hi-Fi sound performance
- Plays CD, WMA/MP3 (CD-R/RW)
- AirPlay on board
- Spotify Connect®, Pandora®, SiriusXM™
- Internet Radio
- Computer/NAS music file streaming (DLNA1.5)
- 2 USB inputs for iPhone/iPod and USB memory play (Front and Rear, Type-A)
- 2 Digital optical inputs for TV or Digital device
- Built-in Wi-Fi network module and built-in antenna
- Bluetooth with NFC
- Customizable front illumination
- Listeners can take control via an Android™ and iOS compatible Marantz Hi-Fi Remote app.

UPC


NA MCR611/U1B 6-99927-71155-9 Black

because music matters



M-CR611

NETWORK CD RECEIVER WITH AIRPLAY, SPOTIFY, BLUETOOTH AND INTERNET RADIO

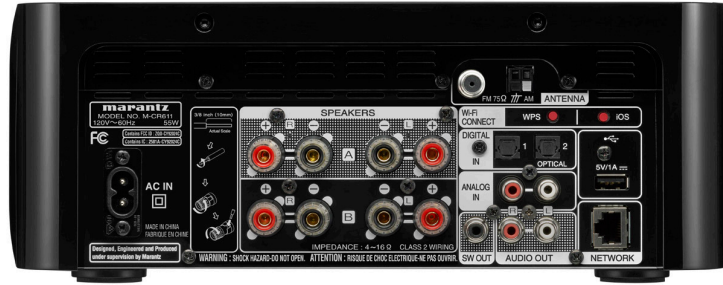

FEATURES	M-CR611
High quality power output	2 x 60 W
CD Compatibility: CD / CD-R/RW / WMA / MP3	• / • / • / •
Tuner: FM / AM	• / •
Streaming audio from computer	•
Bluetooth / NFC	• / •
Internet Radio	•
AirPlay audio streaming	•
Windows 8/RT compatible	•
vTuner / Spotify Connect* / Pandora / SiriusXM	• / • / • / •
USB Audio (Front) / Made for iPod / Made for iPhone	• / • / •
USB Audio (Rear) / Made for iPod / Made for iPhone	• / • / •
USB-A: DSD / WAV / FLAC / AIFF / ALAC	2.8 / 192 / 192 / 192 / 96
Ethernet / Wi-Fi	• / •
Wi-Fi setup: WPS / Wi-Fi Sharing	• / •
DLNA certified	• (V1.5)
Lossy formats: MP3 / WMA / AAC	• / • / •
Lossless formats: FLAC HD / ALAC / WAV / AIFF / DSD	192 / 96 / 192 / 192 / 2.8
Gapless Playback	•
WMM (Wi-Fi Multimedia)	•
Remote APP: iDevice / Android	• / •
Tone Control: Bass / Treble / Balance	• / • / •
Low Noise OLED display	3 line
Illuminated front	4 colors selectable + off mode
Clock	•
Sleep Timer	•
Programmable Timer: Once / Daily	• / •

INPUTS/OUTPUTS	
AUDIO	
Analog In/Out	1
Digital Optical In	2
OTHER	
iPod / iPhone compatible USB input	2
Subwoofer PreOut	•
Main PreOut	AUX assignable
Speaker Terminal: Screw	•
Headphone Out	•
Speaker A / B	• (Individual volume)
Bi-amping	•
Powered multi-room for one extra room	•
SPECIFICATIONS	
AUDIO SECTION	
Power Output (6 ohm, 1kHz)	60 W
Number of channels	2
Freq. Response (Analog In)	5Hz - 40kHz
Signal to Noise Ratio	90dB
Total Harmonic Distortion	0.1 %
TUNER SECTION FM	
Frequency Range FM	87.5 - 107.9 MHz
Signal to Noise Ratio (Mono/Stereo) FM	74/70dB
Total Harmonic Distortion (Mono/Stereo) FM	0.3/0.4%
GENERAL	
Available colors: Black	•
Remote Control	RC013CR
Power Consumption	55 W
Standby Consumption	0.3 W
Maximum Dimensions (W x D x H) in inches	11.5 x 12.01 x 4.37
Weight	7.4 lbs.

Design and specifications are subject to change by Marantz without notice.

* not available in all countries

us.marantz.com

[V01]

because music matters