

## FIorentina 36" DUAL FUEL

1M002ZV1007A SOLID DOOR  
1M002ZV1008A GLASS DOOR



In the Fiorentina 36" Dual Fuel version, six burners of different sizes with double brass burners and massive professional cast iron grills ensure quality and performances. The hob has been designed to guarantee maximum power for the best culinary performances, with a fascinating and long-lasting style. Control and delicacy in one gesture: the separate control of the two rings of the burners: internal, ideal for slow cooking, and external for large firings. The brass burners in fact allow a use that goes from the light simmering to firings that require a maximum power of 17.000 BTU (5 kW). The cast iron grates are built to withstand searing heat and rapid temperature changes without losing their strength. They allow pans to be easily repositioned at your convenience.

The multifunction electric oven has an extra-large capacity, and is equipped with double ventilation for better heat distribution. Multiple baking functions allow for ultimate flexibility, performance and capacity. Inside, telescopic chrome oven racks allow for convenient inspection of dishes during cooking and effortless removal when done.

The wide oven door - available in two versions with and without window - is equipped with an assisted closing system that absorbs shocks and the internal lighting with Halogen lights for flawless visibility. The construction of the door ensures an outdoor temperature of <122°F (50°C) even during the pyrolytic cycle (869°F - 465°C). Black Porcelain enamel interior and the enamelled tray, supplied with the anti-splash grilled cover, facilitates the collection of liquids, while preventing them from dirtying the walls of the cooking compartment, thus facilitating cleaning. In addition, the oven has additional functions such as the Pyrolysis function for self-cleaning and Booster for rapid temperature reaching and a food temperature probe.

### COOKING SURFACE

3 Heavy Duty, continuous cast iron grates  
One piece, matte finish porcelain burner bowl  
6 Dual-Flame Professional Burners  
2 X 20,000 BTU max (NG)  
4 X 18,000 BTU max (NG)  
Natural Gas (LP convertible)

### OVEN

Dual True Convection  
Self-cleaning oven with Multifunction baking  
Black Porcelain enamel interior  
Cool to the touch soft closing door  
Extra-large baking cavity and viewing area  
3 Halogen lights for flawless visibility  
Total capacity 147,2 lt  
Total capacity 5.2 cu. ft.

### OVEN FUNCTIONS

Bake  
Broil  
Roast  
Convection  
True Convection  
Warm / Proof / Dehydrate  
Electronic cooking programmer  
Fast Pre-Heat  
Self-Clean  
Sabbath Mode

### INCLUDED ACCESSORIES

2 chrome racks  
1 telescopic rack  
Enameled Broiler Pan

**1M002ZV1007A SOLID DOOR**  
**1M002ZV1008A GLASS DOOR**

VER. 1.0 - 2024.05.30

| CONTROL PANEL                              |   |   |                               |
|--|---|---|-------------------------------|
| Control Type                               | 8 knobs   |   |                               |
| Oven Programming                           | Electronic with 6 Touch Keys                            |   |                               |
| Display: Clock - Temperature - Function    | White LED   |   |                               |
| GAS COOKTOP FEATURES                       |   |   |                               |
|  | Electric Re-ignition system                             | Flame-out sensing                       | Top Mount Injectors           |
|  | L.P. Conversion Kit                                     | Dual Crown Brass Burner                 | 2 Heavy Duty Cast Iron Grates |
| Type                                       | GAS (NG or LP)  |   |                               |
| Cooking Zones                              | 6   |   |                               |
| Burners types                              | All Dual Flame/Simmer Burners                           |   |                               |
| Power Front-L,Front-R (Max/Min) NG         | 20000 (BTU/h) - 5900W / 750 (BTU/h) - 220W              |   |                               |
| Power Front-R (Max/Min) NG                 | -   |   |                               |
| Power (Max/Min) NG                         | 18000 (BTU/h) - 5300W / 750 (BTU/h) - 220W              |   |                               |
| Power (Max/Min) LP                         | 15000 (BTU/h) - 4400W / 750 (BTU/h) - 220W              |   |                               |
| OVEN                                       |   |   |                               |
| Oven Type                                  | Electric Self-clean - Dual Convection (True Euro Conv.) |   |                               |
| Temperature Regulation                     | Electronic Control (min/max 170/550°F - 75/290°C)       |   |                               |
| OVEN FUNCTIONS                             |   |   |                               |
|  | Pyrolytic Self-Clean                                    | Dehydrate                               | True Convection               |
|  | Thaw (Defrost)  | Convection Broil                        | Proof (Warm)                  |
|  | Convection Roast  | Keep warm (Warm Plus)                   | Pizza (Lower Convection)      |
|  | Oven Lights   | Bake                                    | Broil                         |
|  | Preset/Last Used Temperature Memory                     | Preheat Indicator (25%, 50%, 75%, 100%) | Child Door Lock               |
|  | Control Display Lock                                    | Fast Preheat                            | 12/24 Hour Clock Formats      |
|  | Sabbath Mode  | Temperature Display °C/°F               | Meat Probe                    |
| OVEN CAVITY                                |   |   |                               |
| Total Capacity                             | 5,20 cu. ft.  | 147,2 lt                                |                               |
| Cavity Enamel Color                        | Black   |   |                               |
| Rack Positions                             | 6   |   |                               |
| Oven Lights                                | 2x20W Halogen   |   |                               |
| HEATING ELEMENTS (@240V)                   |   |   |                               |
| Broil Upper Heating Element                | 3500 W  |   |                               |
| Upper Auxiliary Element Wattage            | 1032 W  |   |                               |
| Concealed Bake Lower Heating Element       | 3000 W  |   |                               |
| Convection Element                         | 2 x 1300 W  |   |                               |
| OVEN ACCESSORIES                           |   |   |                               |
| Chrome Racks                               | 2   |   |                               |
| Enameled Broiler Pan (basin + anti splash) | 1   |   |                               |
| Telescopic Chrome Rack                     | 1   |   |                               |
| DIMENSIONS                                 |   |   |                               |
| Overall dim - Width                        | 35-15/16"   | 912 mm                                  |                               |
| Overall dim - Height (min - max)           | 37 - 3/8", 31 - 5/8"                                    | 948 mm - 980 mm                         |                               |
| Overall dim - Depth                        | 30 - 1/16"  | 764 mm                                  |                               |
| Gross Weight                               | 382 lbs   | 174 kg                                  |                               |
| POWER / RATINGS (208/240 V, 60 HZ)         |   |   |                               |
| kW / Amps rating at 120-240V, 60Hz         | 3.84 kW - 16.9 A  |   |                               |
| kW / Amps rating at 120-208V, 60Hz         | 3.54 kW - 17.5 A  |   |                               |
| Power Cable                                | Nema 14-50P   |   |                               |






## FIorentina 36" DUAL FUEL

1M002ZV1007A SOLID DOOR  
1M002ZV1008A GLASS DOOR

VER. 1.0 - 2024.05.30

### MEASUREMENTS - 1M002ZV1007A SOLID DOOR

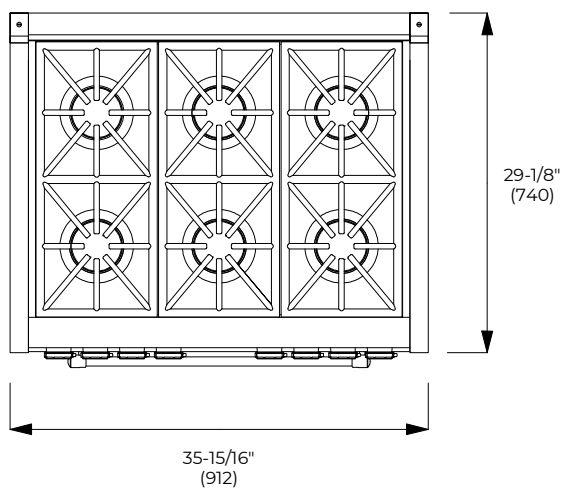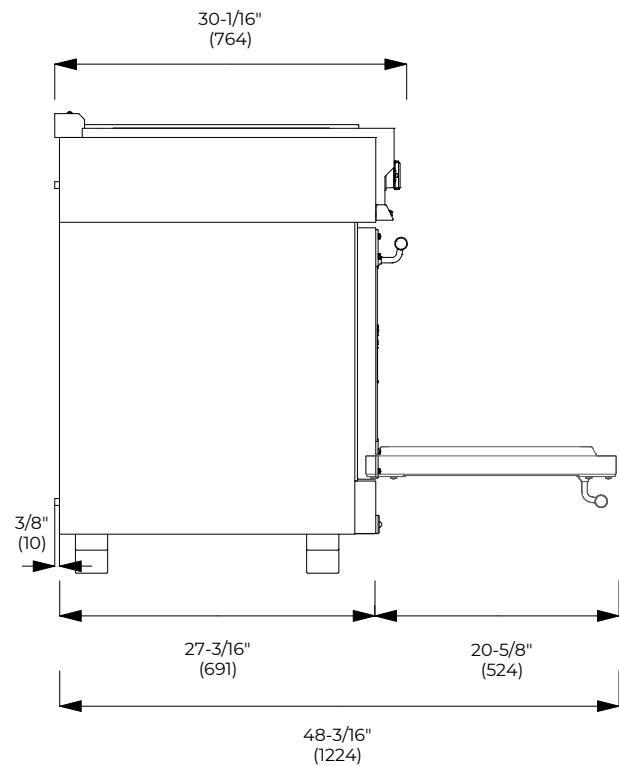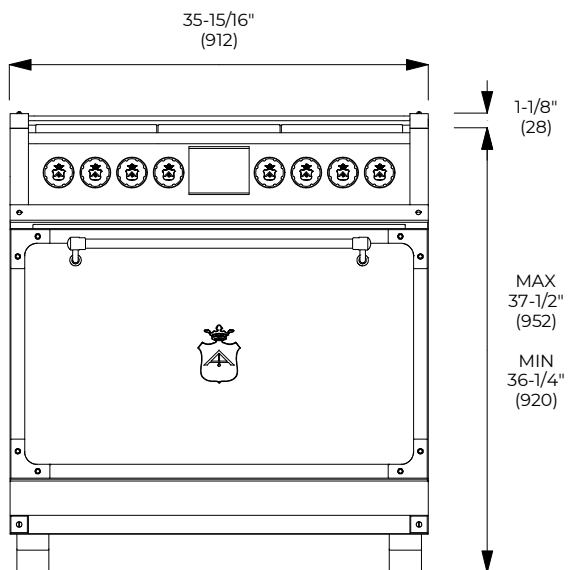


FIORENTINA 36" DUAL FUEL


1M002ZV1007A SOLID DOOR
  
1M002ZV1008A GLASS DOOR

VER. 1.0 - 2024.05.30

MEASUREMENTS - 1M002ZV1008A GLASS DOOR

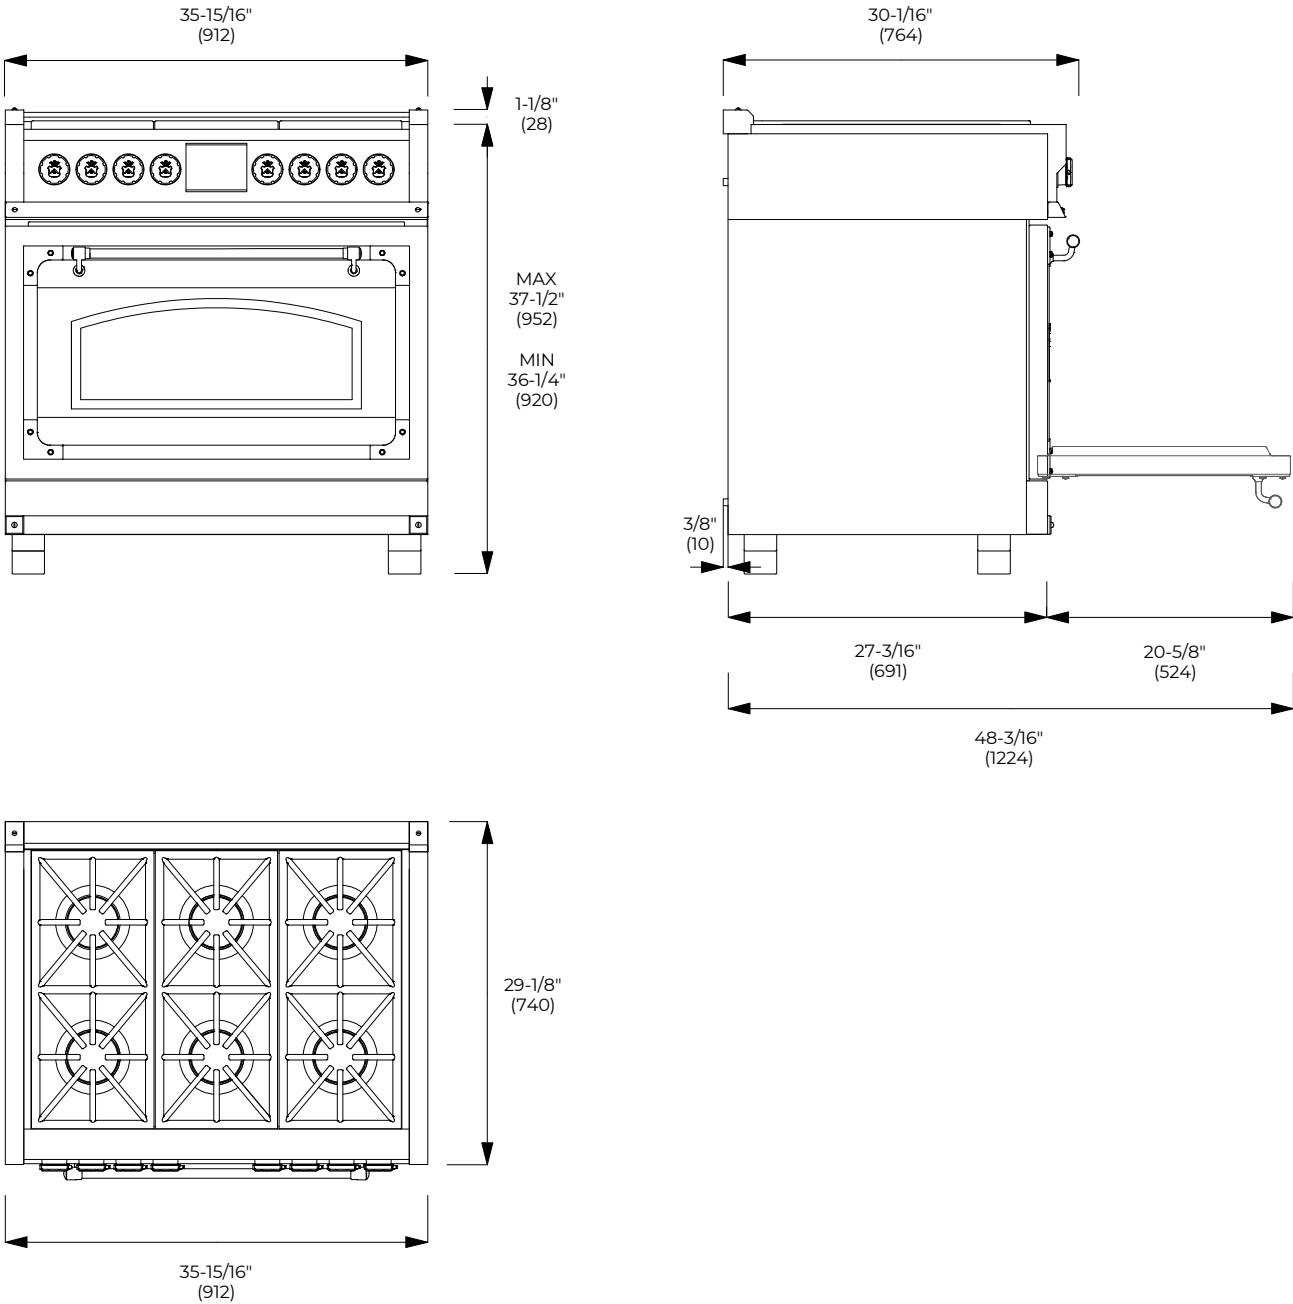

CUTOUT REQUIREMENTS

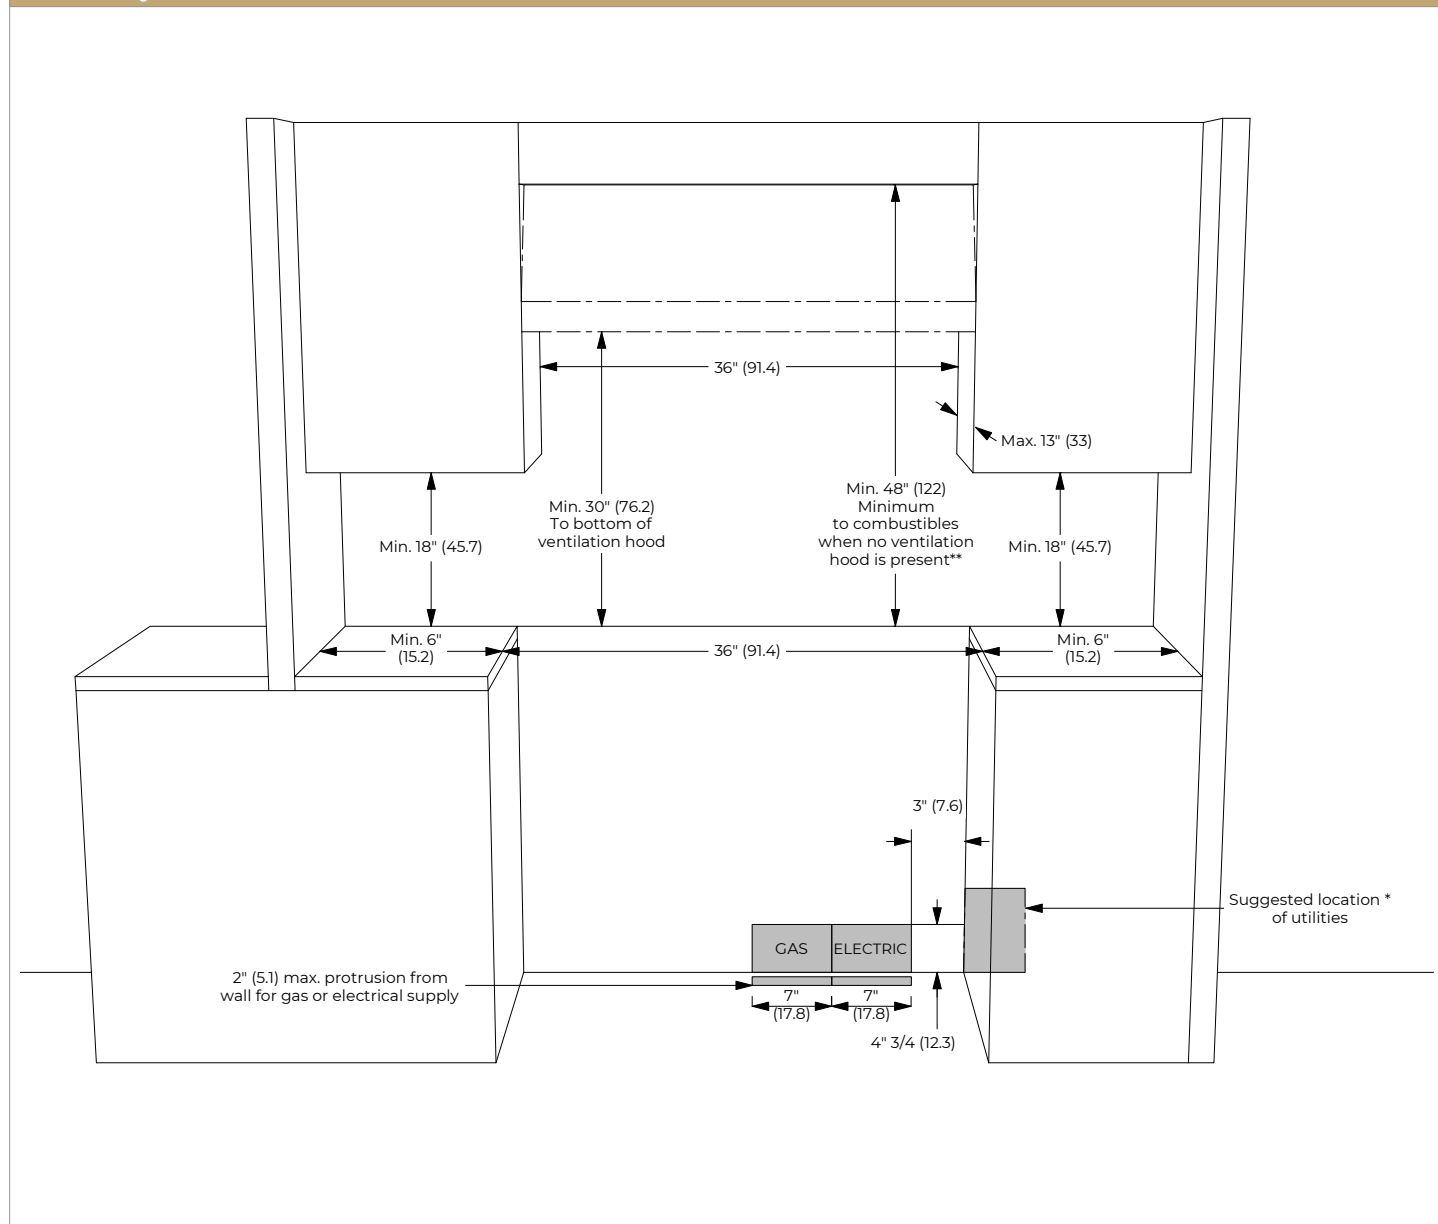

**\*\*NOTE:** Ensure your installation also complies with local and national building and fire codes. If the surface of the entire back wall above the range and below the hood is not composed of a non-combustible material then the 9" accessory back guard must be used.

**\*Consult local code for exact location requirements.**