

# AVR-E200

AV Surround Receiver

# DENON

## Great Sound Made Easy

### Powerful 5.1 Channel AV Receiver with 3D Video Pass-through & Easy Setup with Easy Connections

Enjoy thrilling 5.1 channel surround sound with Denon's AVR-E200 AV receiver, which features easy setup and easy connections and which provides an on-screen text and graphical display that greatly simplifies setup and operation. Packed with features, the AVR-E200 includes the latest high resolution audio decoders, including Dolby TrueHD and DTS-HD Master Audio for the ultimate surround sound experience with your favorite Blu-ray movies and music concerts. There are 4 HDMI inputs, including 1 conveniently located on the front panel, and there's also a convenient 3.5mm stereo audio input on the front panel that lets you connect your favorite portable audio device. With our exclusive Compressed Audio Restorer function, you'll hear improved fidelity with compressed audio sources such as MP3 tracks.



### Features

#### State-of-the-art Denon Solutions for Maximizing Content Quality

- Maximum power, 165 watts, 5 channels
- All-discrete output stages with equal power and identical quality on all channels
- Supports 1080P and 3D video pass-through
- High definition audio support including Dolby TrueHD and DTS-HD Master Audio
- High-performance 192kHz/24-bit D/A converters for all channels
- Denon's proprietary Compressed Audio Restorer delivers improved fidelity with compressed music sources such as MP3 tracks

#### Connectivity

- Supports HDMI with 3D pass-through, Deep Color and x.v.Color
- Convenient front panel HDMI input for connecting a camcorder or game console
- 4 HDMI inputs (1 on the front panel) - 1 HDMI output
- Convenient stereo mini input (3.5mm) on the front panel lets you connect your favorite portable audio player

#### Easy to Setup; Easy to Use

- Color-coded push-type speaker terminals with included speaker cable labels
- Easy operation with our intuitive GUI (Graphical User Interface)
- GUI overlay
- Front panel display with large, easy-to-read characters
- Less chassis depth for an easier installation
- Four Quick Select buttons, for easy operation
- Comes with simple, easy-to-use remote controller
- Sleep Timer, set up to 120 minutes in 10-minute increments
- Standby HDMI pass-through
- Auto power off

#### Others

- Audio Delay function
- Lower power consumption at standby 0.3 W

### State-of-the-art Denon Solutions for Maximizing Content Quality

- Maximum power, 165 watts, 5 channels

Delivers the legendary sound quality you have come to expect from Denon.

- All-discrete power amp, equal power, identical quality

The power output stage features all-discrete high current power devices that are able to handle lower impedance speakers. The power amp stages for all 5 channels feature identical circuit design to ensure highest sound quality and consistency on all channels for the best surround sound experience, delivering wide dynamic range and low distortion.



- High-definition audio support including Dolby TrueHD and DTS-HD Master Audio

The AVR-E200's DSP audio decoder features support for Dolby TrueHD and DTS-HD Master Audio that let you enjoy the highest quality surround sound with your favorite Blu-ray discs.

### Connectivity

- 4 HDMI inputs (1 on front panel) - 1 HDMI output

Lets you connect your HDMI-equipped HDTV with a single cable.




- Front panel HDMI input



### Ease-of-use

- Color-coded push-type speaker terminals and supplied speaker cable labels for quick and easy setup.

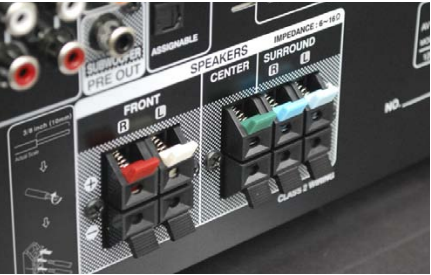

- GUI overlay on HD Source

You can easily make settings for your home theater system while viewing menus on the TV screen. These menu displays can also be output to the monitor over HDMI.



- Four Quick Select buttons, for easy operation

With the Quick Select buttons, you can preset volume levels for the sources you most frequently use. Then when you use one of the buttons to select a source, it is ready to play using the same settings each time.



- Sleep Timer, set up to 120 minutes in 10-minute increments

When you set the Sleep Timer and listen to music before you fall asleep, the AVR-E200 will automatically go into standby mode in the time that you set.

### Main Specifications

#### Power amplifier section

Rated output	*THD figures are power amp stage values.
Front L/R	75 W + 75 W (8 Ω/ohms, 20 Hz - 20 kHz, THD 0.08 %) 110 W + 110 W (6 Ω/ohms, 1 kHz, THD 0.7%)
Center	75 W (8 Ω/ohms, 20 Hz - 20 kHz, THD 0.08 %) 110 W (6 Ω/ohms, 1 kHz, THD 0.7%)
Surround L/R	75 W + 75 W (8 Ω/ohms, 20 Hz - 20 kHz, THD 0.08 %) 110 W + 110 W (6 Ω/ohms, 1 kHz, THD 0.7%)

#### Preamplifier section

Input sensitivity/impedance	200 mV / 47 kΩ/kohms
Frequency response	10 Hz - 100 kHz - +1, -3 dB (DIRECT mode)
S/N Ratio	98 dB (JHF-A weighted, DIRECT mode)

#### FM section

Tuning frequency range	87.5 - 107.9 MHz
------------------------	------------------

#### AM section

Tuning frequency range	520 - 1710 kHz
------------------------	----------------

#### General

Power supply	AC 120 V, 60 Hz
Power consumption	330 W (Standby 0.3 W)
Dimensions (W x H x D)	17 3/32" x 5 15/16" x 12 9/16" 434 x 151 x 319 mm
Weight	17 lbs 7 oz, 7.9 kg

### Ports

In	HDMI (Incl. Front 1)	4
	Video (composite)	2
	Analog audio	2
	Stereo mini jack (3.5mm)	1
	Digital audio (optical)	1
	Digital audio (coaxial)	1
Out	HDMI monitor	1
	Video (composite) monitor	1
	Audio preout (subwoofer)	1
	Phones	1
Others	FM tuner antenna	1
	AM tuner antenna	1

\*Design and specifications are subject to change without notice.  
\*\*"Dolby", "Pro Logic" and the double-D symbol are trademarks of Dolby Laboratories.  
\*DTS is a registered trademark and the DTS logos, Symbol and DTS-HD are trademarks of DTS, Inc.  
\*The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

