

# Item: BR9DRLEEDR-T

## Assembly Instructions






Please visit our website for the most current instructions, assembly tips, to report damage or request parts. [www.walkerediton.com](http://www.walkerediton.com)


Revised 01/2024 - V1

# General Assembly Guidelines

- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are wood dowels, screws and bolts.
- V. A hammer, Phillips head screwdriver and tape measure is required for the assembly of this product.



- VI. Power tools should not be used to assemble this product.




## VII. Maintenance Guide



To maintain long term performance and easy gliding of your solid wood drawers, we recommend applying wax to the wooden guide rails.

1. Bee's wax is recommended or Paraffin wax from a standard candle can be used.
2. Apply the wax by rubbing it on the wooden guide rails where there is wood-on-wood contact when opening and closing the drawer. (Wax should be room temperature, do not melt the wax onto the wood)
3. Wax should be applied every few months for the first year and then only when needed after that to keep the drawers sliding smoothly.

# Parts List

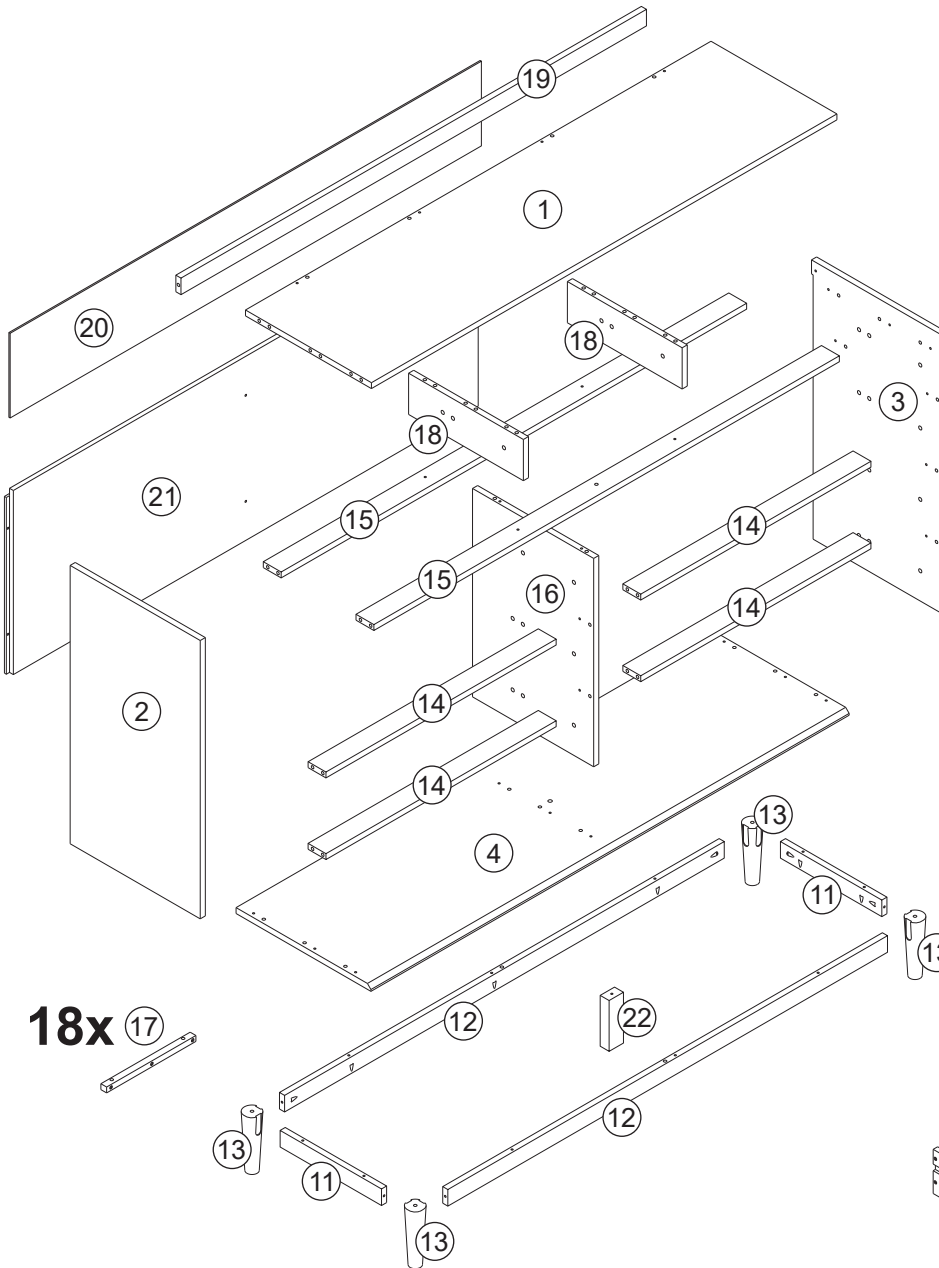


3x

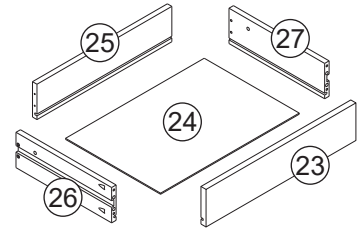

The side drawer with WARNING LABEL, should be mounted in highest drawer.



6x



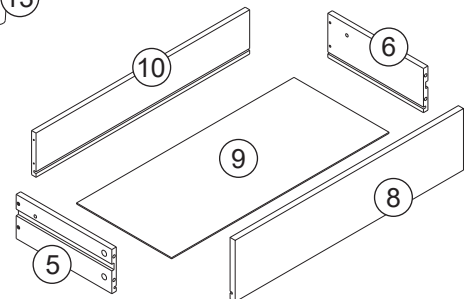


















18x




Part #	Description	Qty	Part #	Description	Qty	Part #	Description	Qty
1	Top panel	01 pc	10	Drawer back	06 pcs	19	Top rail	01 pc
2	Left side panel	01 pc	11	Bottom side rail	02 pcs	20	Back Panel	01 pc
3	Right side panel	01 pc	12	Bottom front rail	02 pcs	21	Bottom back panel	01 pc
4	Base	01 pc	13	Foot	04 pcs	22	Central foot	01 pc
5	Left drawer side	06 pcs	14	Front rail	04 pcs	23	Small drawer front	03 pcs
6	Right drawer side	05 pcs	15	Large front rail	02 pcs	24	Small drawer bottom	03 pcs
7	Right drawer side (warning)	01 pc	16	Divison	01 pc	25	Small drawer back	03 pcs
8	Drawer front	06 pcs	17	Wood slider	18 pcs	26	Small left drawer side	03 pcs
9	Drawer bottom	06 pcs	18	Small division	02 pcs	27	Small right drawer side	03 pcs

# Hardware List

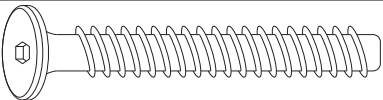
A		Ø8*30mm	Wood dowel	75 pcs
B		Ø8*40mm	Wood dowel	18 pcs
C		Ø10*20mm	Wood dowel	54 pcs
D		Ø3,0*12mm	Screw	30 pcs
E		Ø3,5*20mm	Screw	05 pcs
F		Ø4,0*25mm	Screw	54 pcs
G		Ø4,0*30mm	Screw	67 pcs
H		Ø4,0*40mm	Screw	13 pcs
I		Ø4,5*50mm	Screw	08 pcs
J		-	Handle	15 pcs
K		Ø8,0*31mm	Cam bolt	50 pcs
L		Ø15*11mm	Cam lock	50 pcs
M		-	Ø6mm	01 pc
N		-	Washer	02 pcs
O		-	Wall anchor	01 pc
P		Ø7,0*50mm	Screw	01 pc
Q		-	Hex Key	01 pc
R		Ø8,0*8mm	Nail	20 pcs



Hammer  
recommended  
for assembly  
(not included)




Phillips head  
screwdriver required  
for assembly  
(not included)





Tape measure  
required for  
assembly  
(not included)

*The hardware quantities listed above are required for proper assembly.  
Some extra hardware may also have been included.*


# Step 1

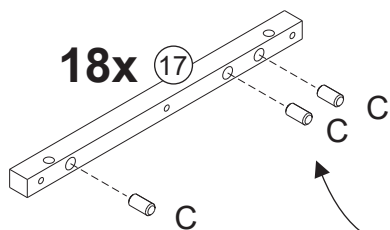


Attention to the  
dowel size:  
Ø10\*20mm

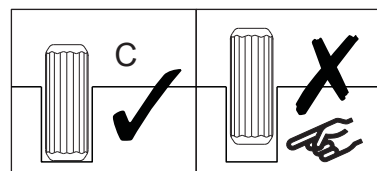


Insert wood dowel (C) into part 17.




# Step 2

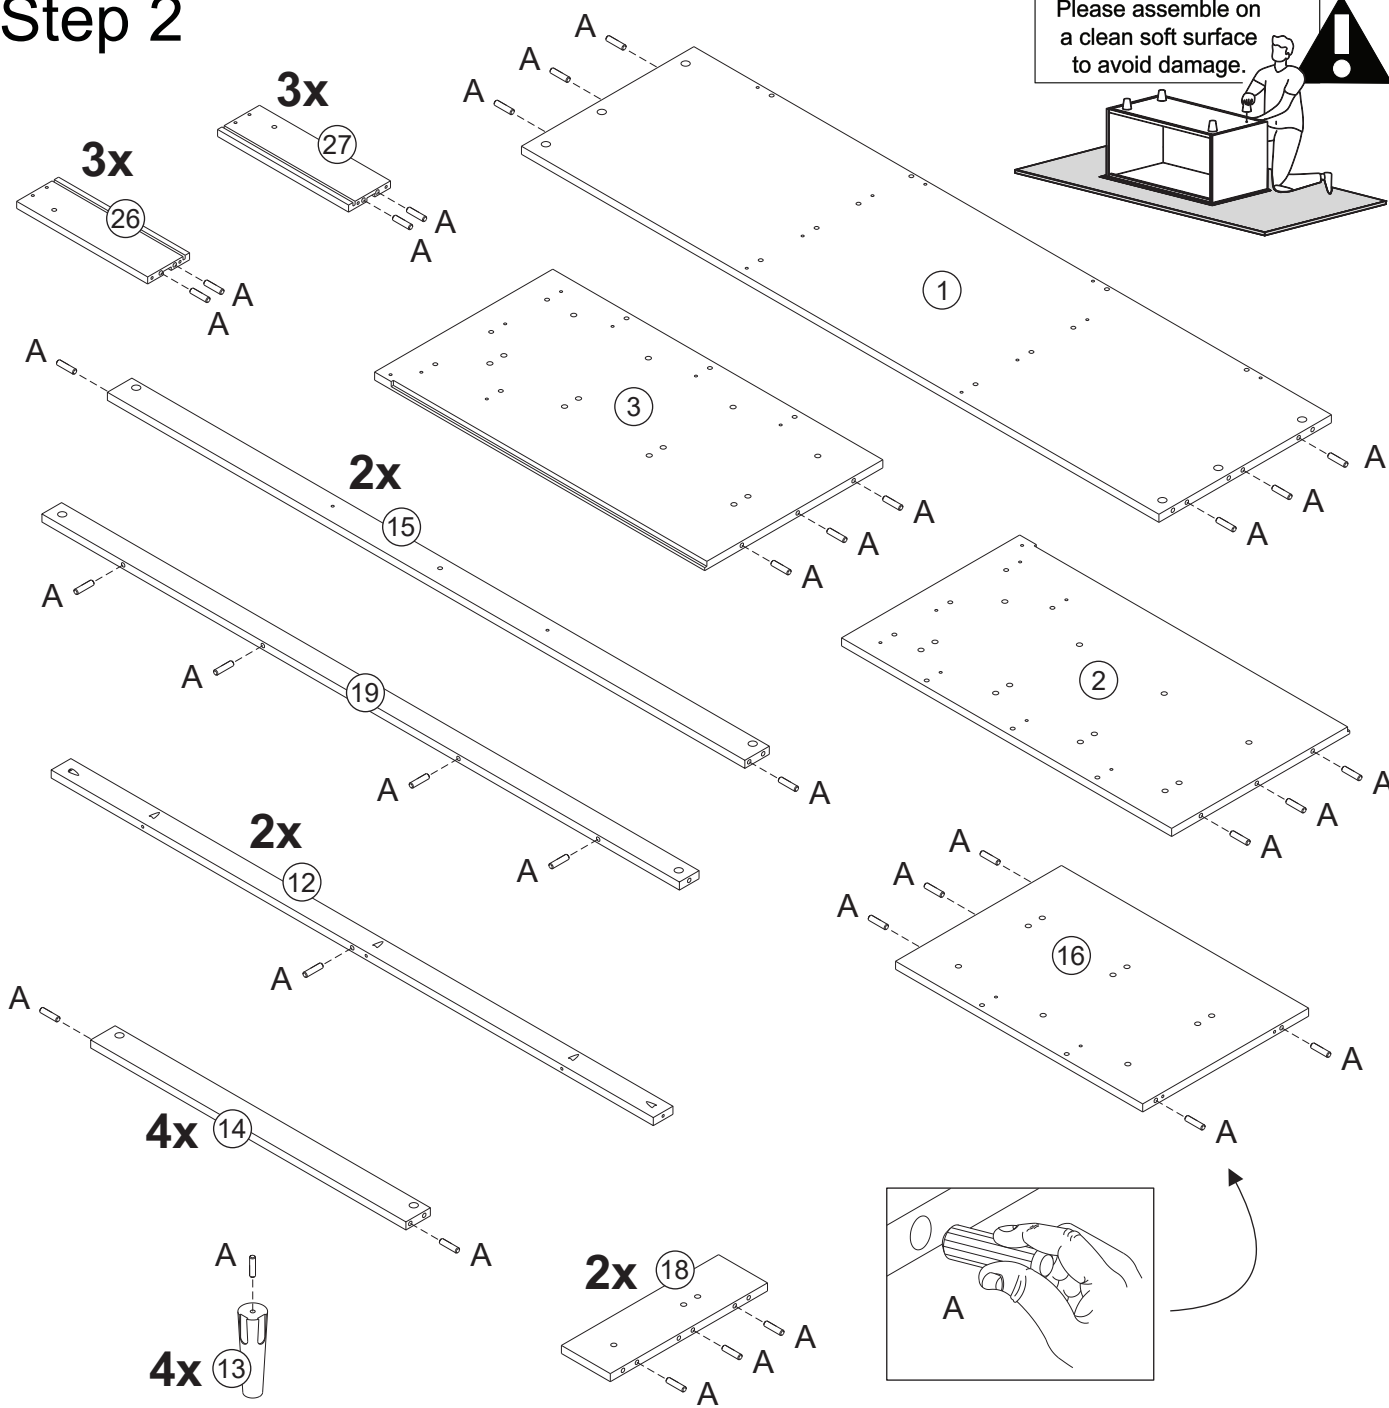

Insert wood dowel (A) into parts  
1, 2, 3, 12, 13, 14, 15, 16, 18, 19, 26 and 27.



# Step 3


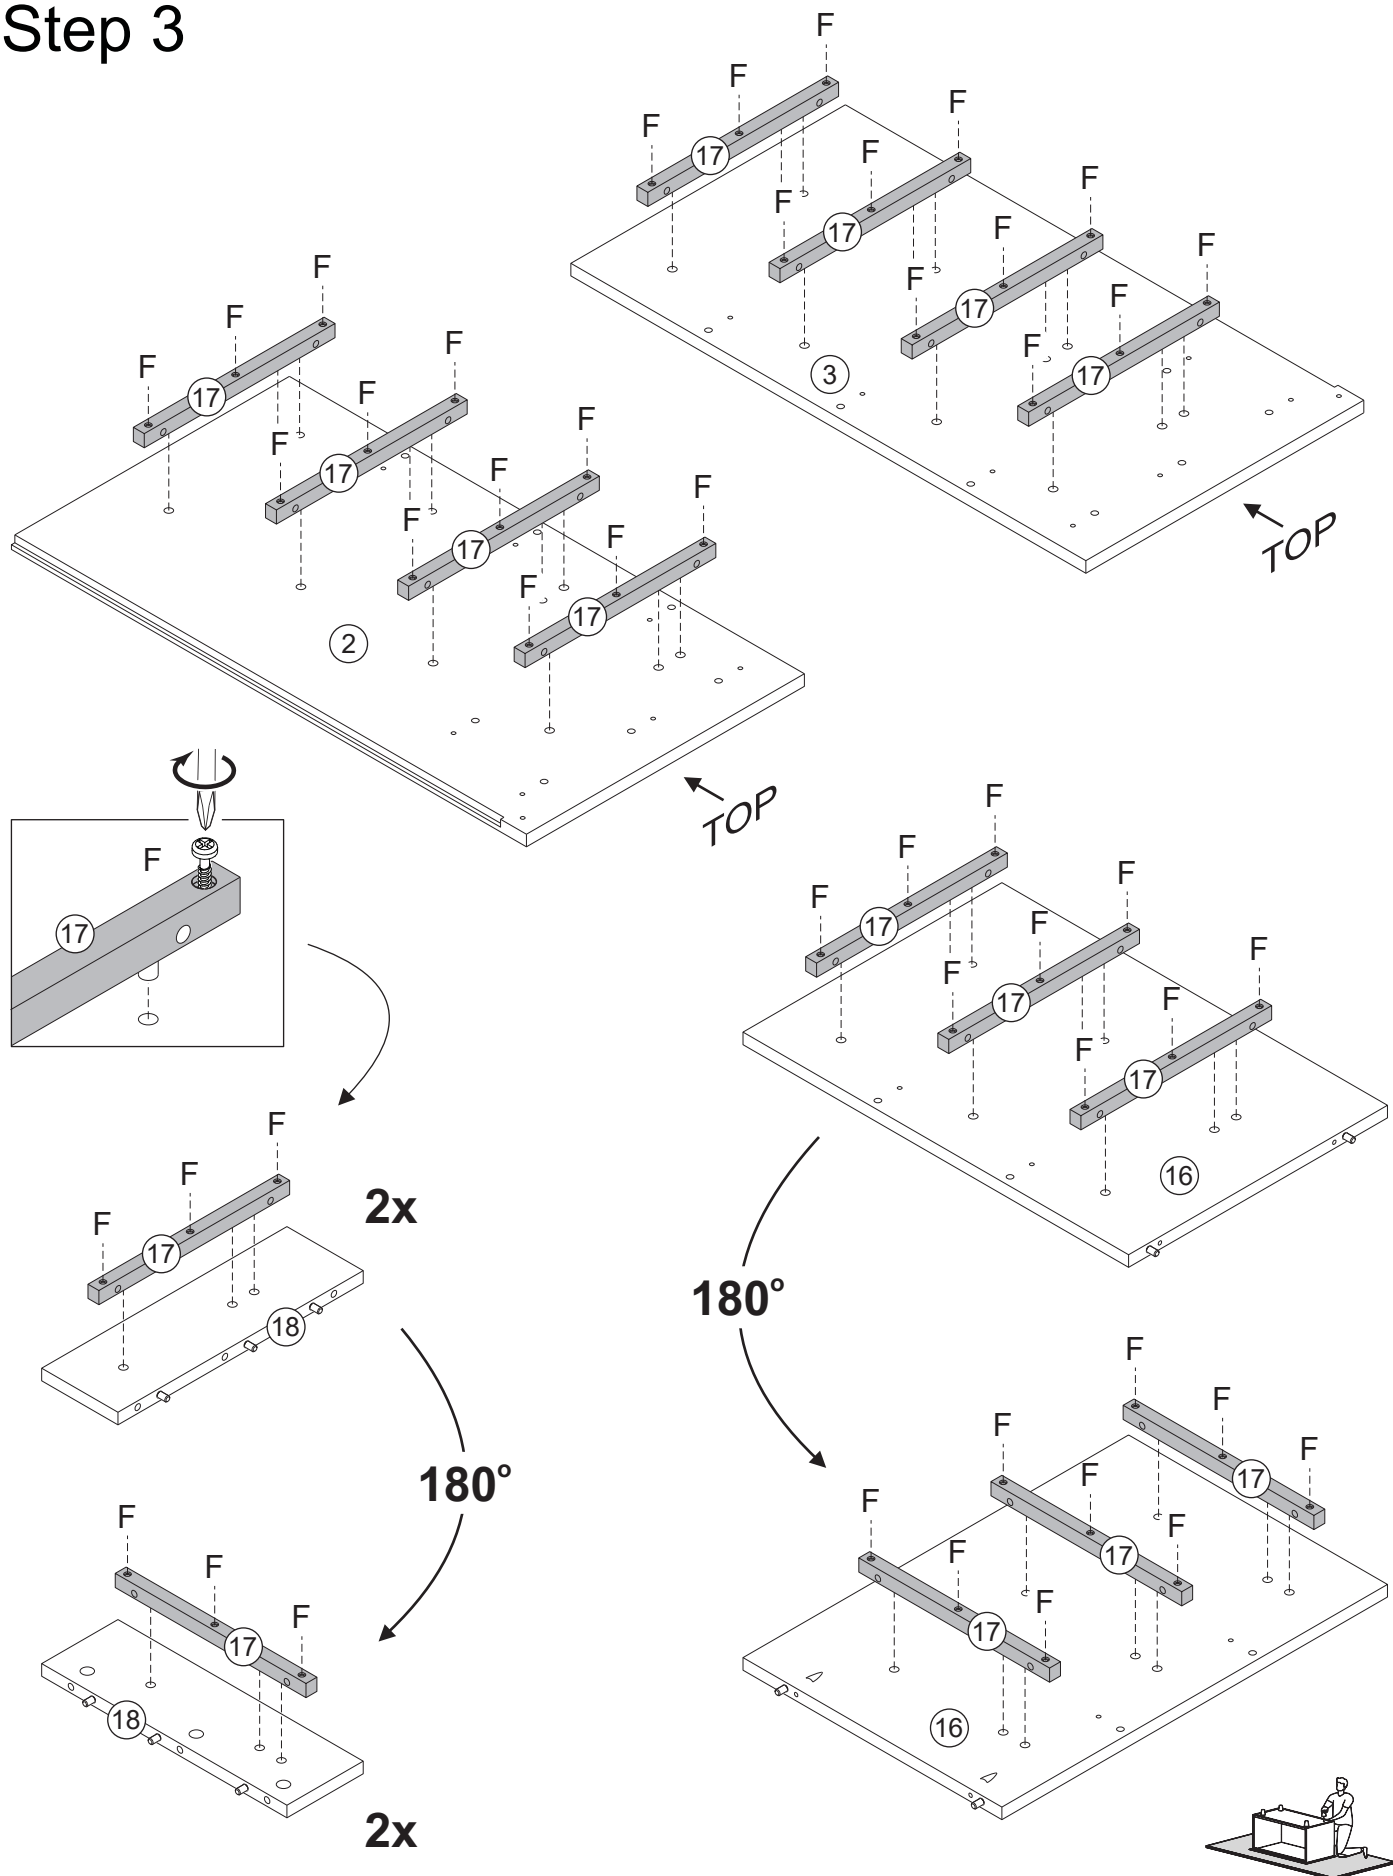


Secure parts 17 to part 2, 3, 16 and 18 with screw (F) and phillips screwdriver.


F		54
		Ø4,0*25mm

# Step 4


1 - Ensure cam bolt is installed straight and not at an angle.  
2 - Tighten cam bolt until shoulder on cam bolt is flush. Do not over-tighten.

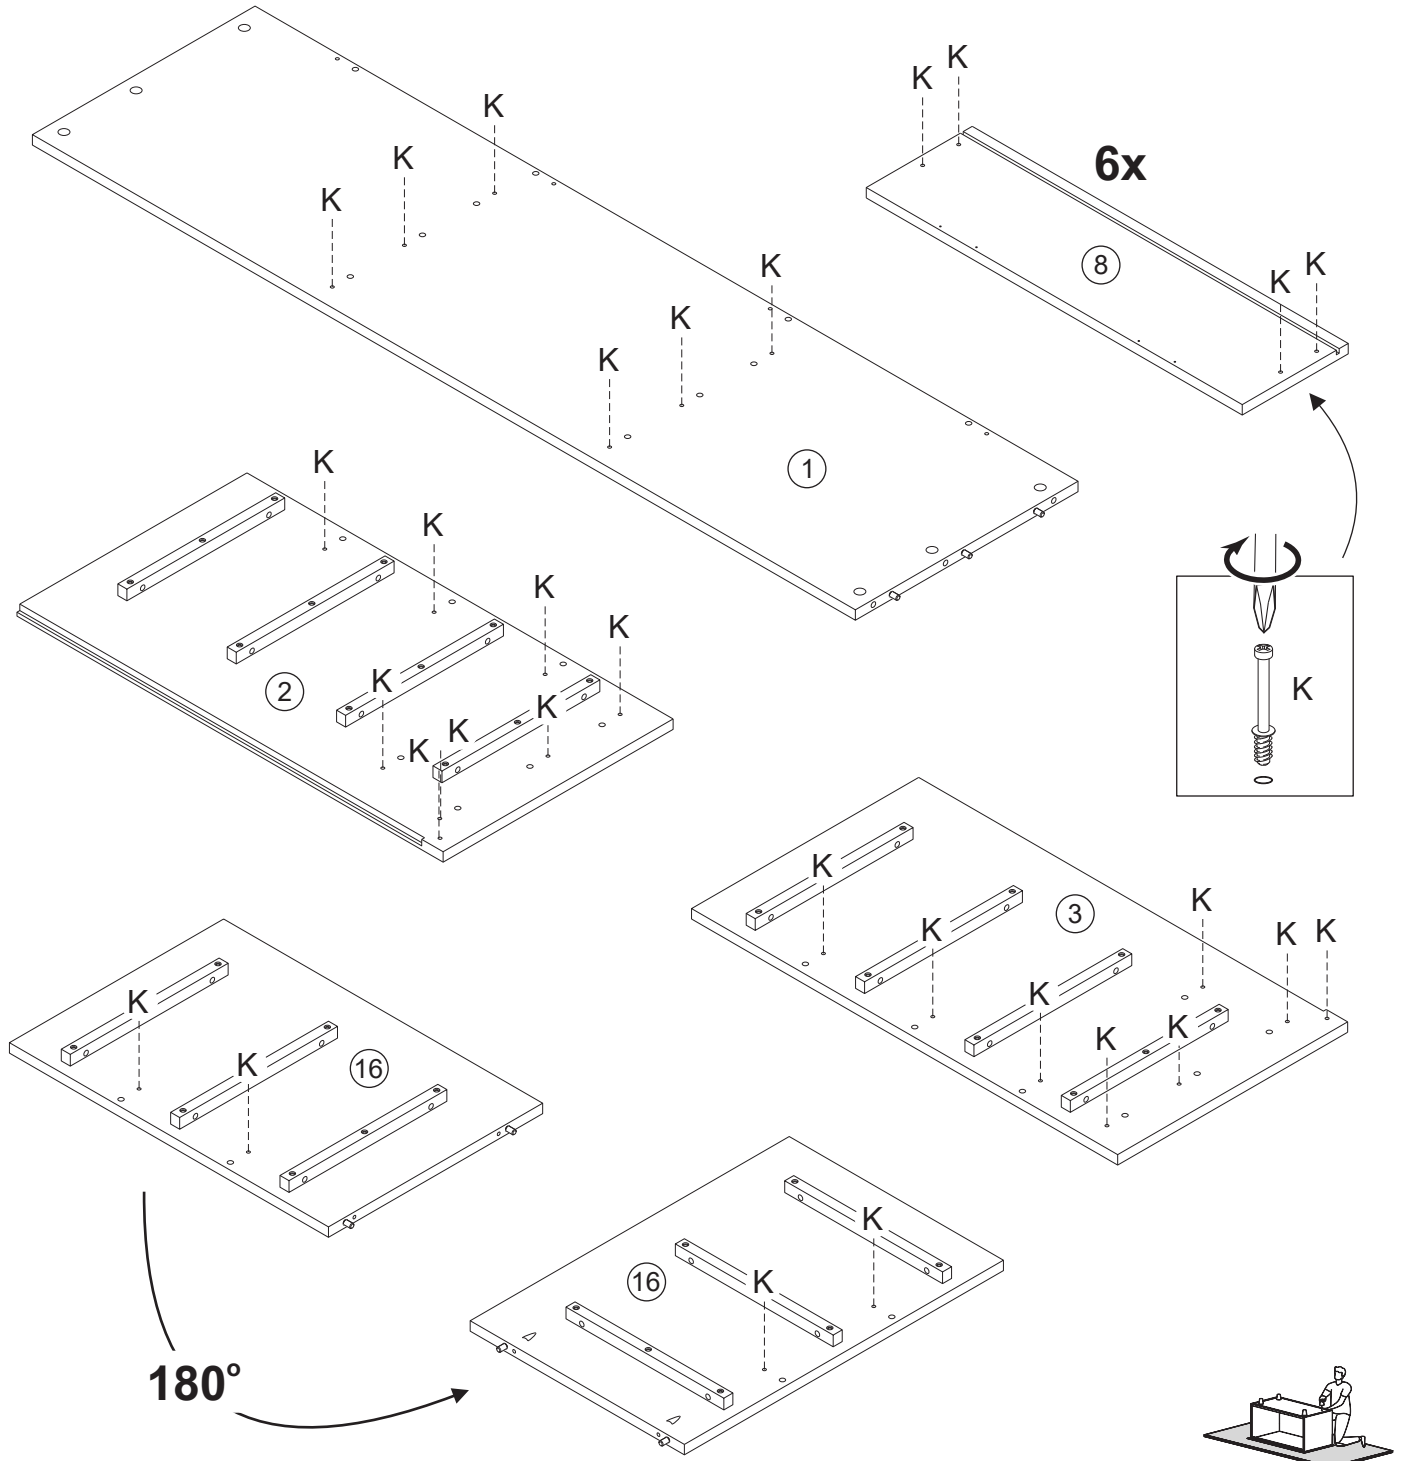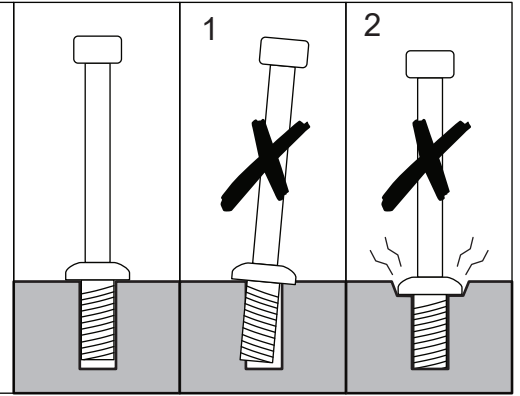


Screw cam bolts (K) into parts 1, 2, 3, 8 and 16 with a phillips screwdriver.




## Step 5

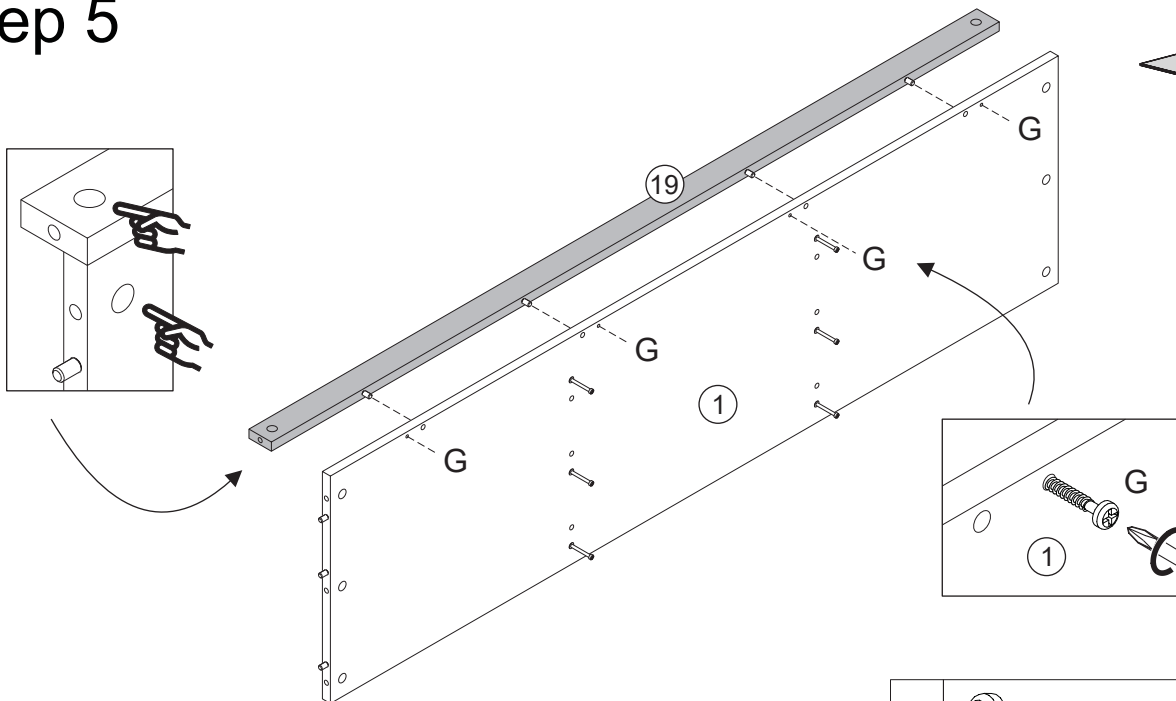


Secure part 19 to part 1 with screw (G) and phillips screwdriver.

G		04
Ø4,0*30mm		

## Step 6

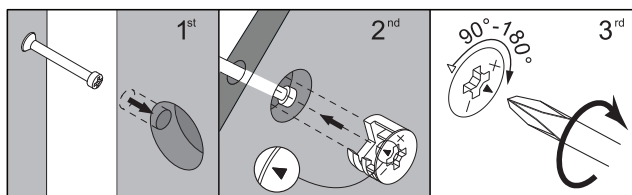

Align the opening in cam lock to the cam bolt and press into opening. Using a screwdriver, rotate the cam lock until it engages with the cam bolt and locks in place (anywhere between 90-180 degrees). Do not over-tighten the cam lock. Doing so may result in damaged or broken parts.

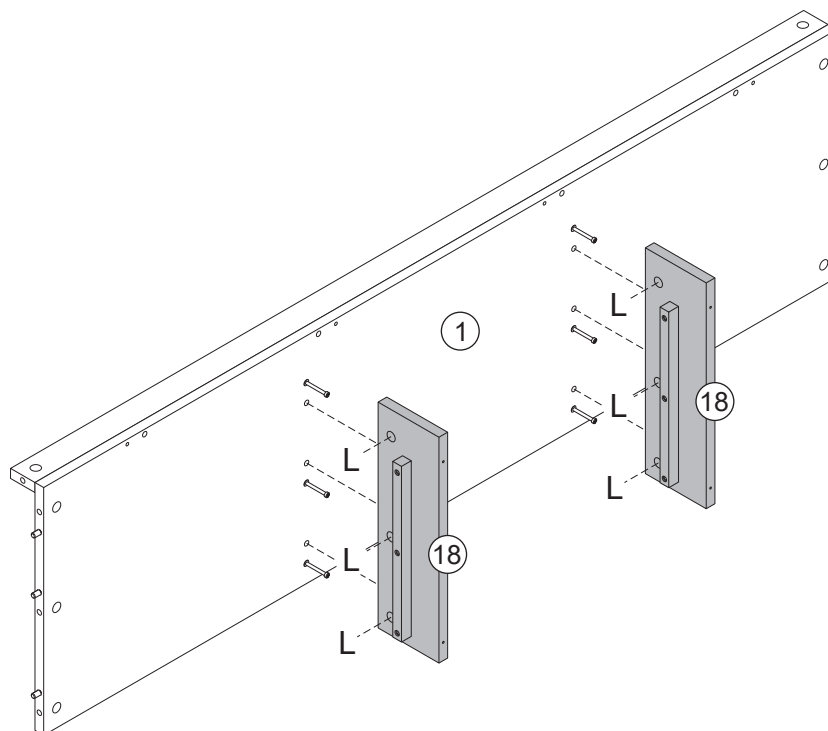


Secure part 18 to part 1. Insert cam locks (L) into part 18, and tighten with a phillips screwdriver.


L		06
Ø15*11mm		




## Step 7

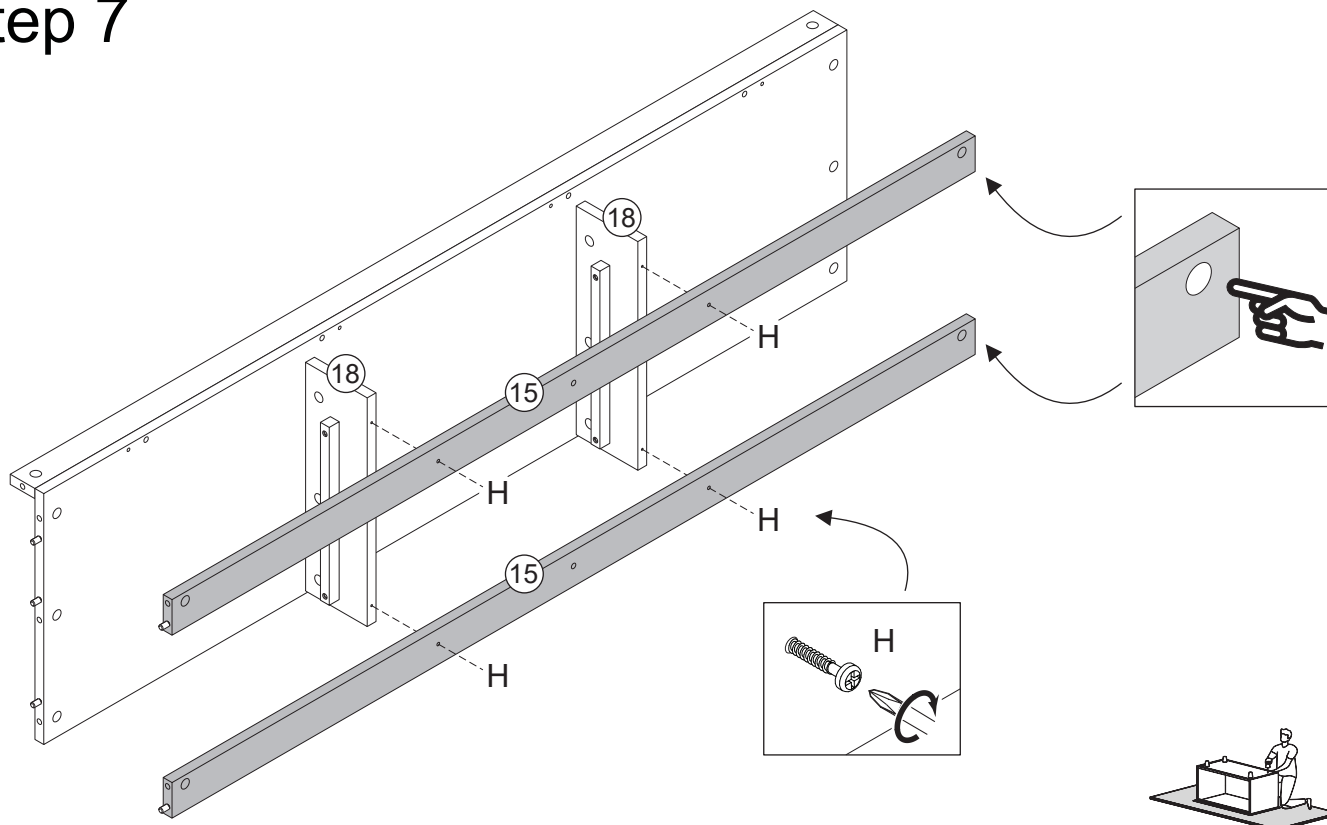


Secure part 15 to part 18 with screw (H) and phillips screwdriver in the pre holes.






## Step 8

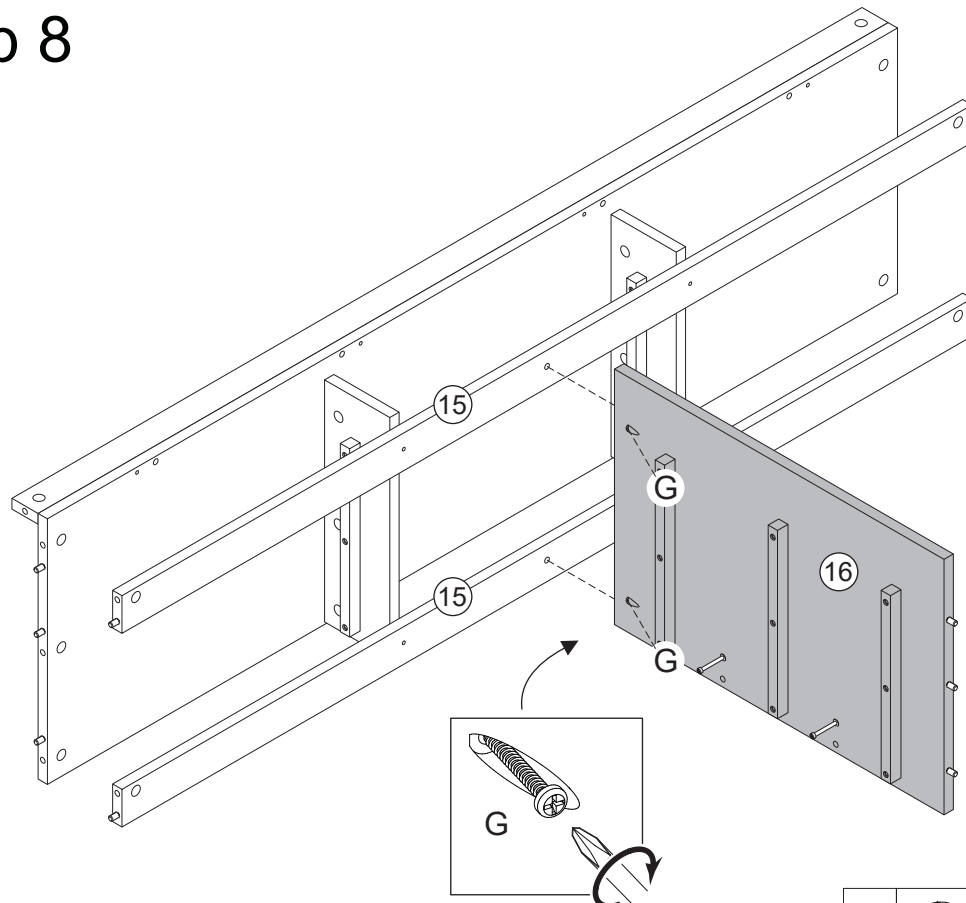

Secure part 16 to part 15 with screw (G) and phillips screwdriver.





## Step 9

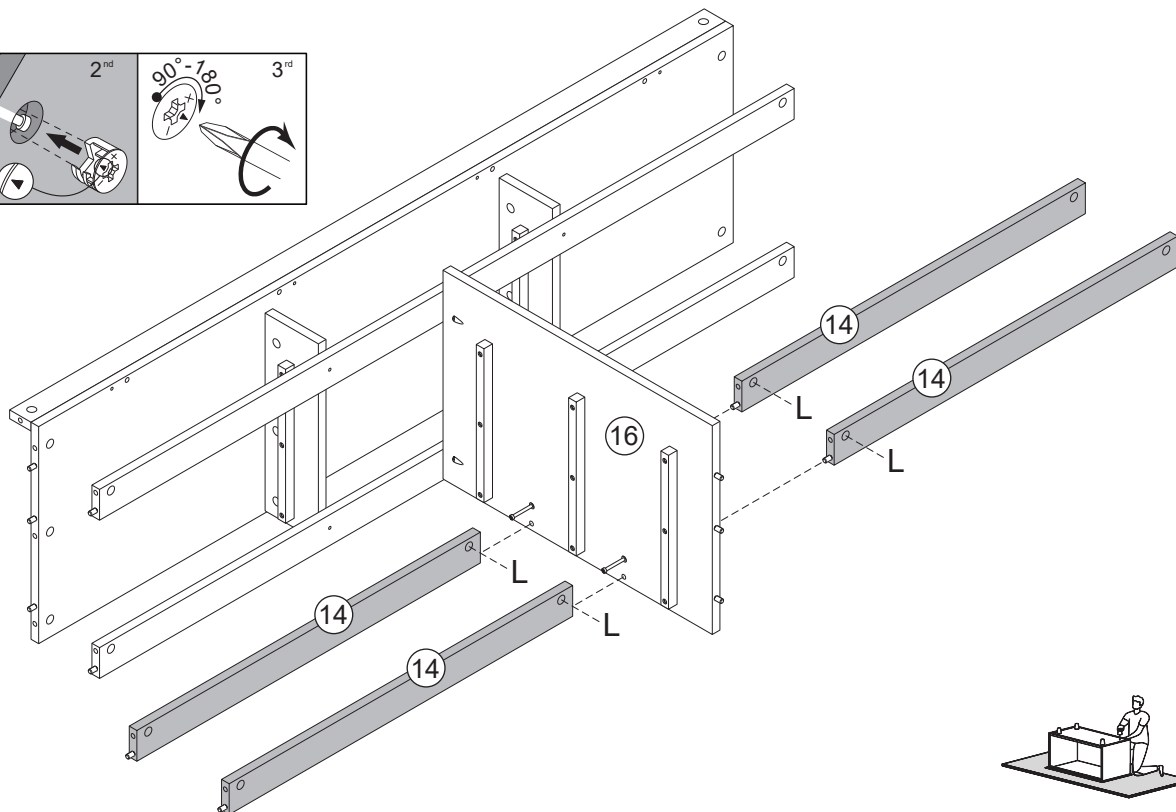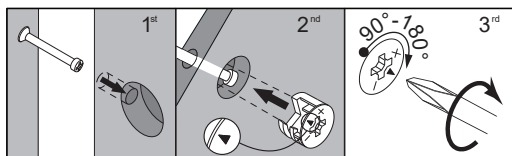

Secure part 14 to part 16. Insert cam locks (L) into part 14, and tighten with a phillips screwdriver.

L		Ø15*11mm	04
---	--	----------	----



## Step 10

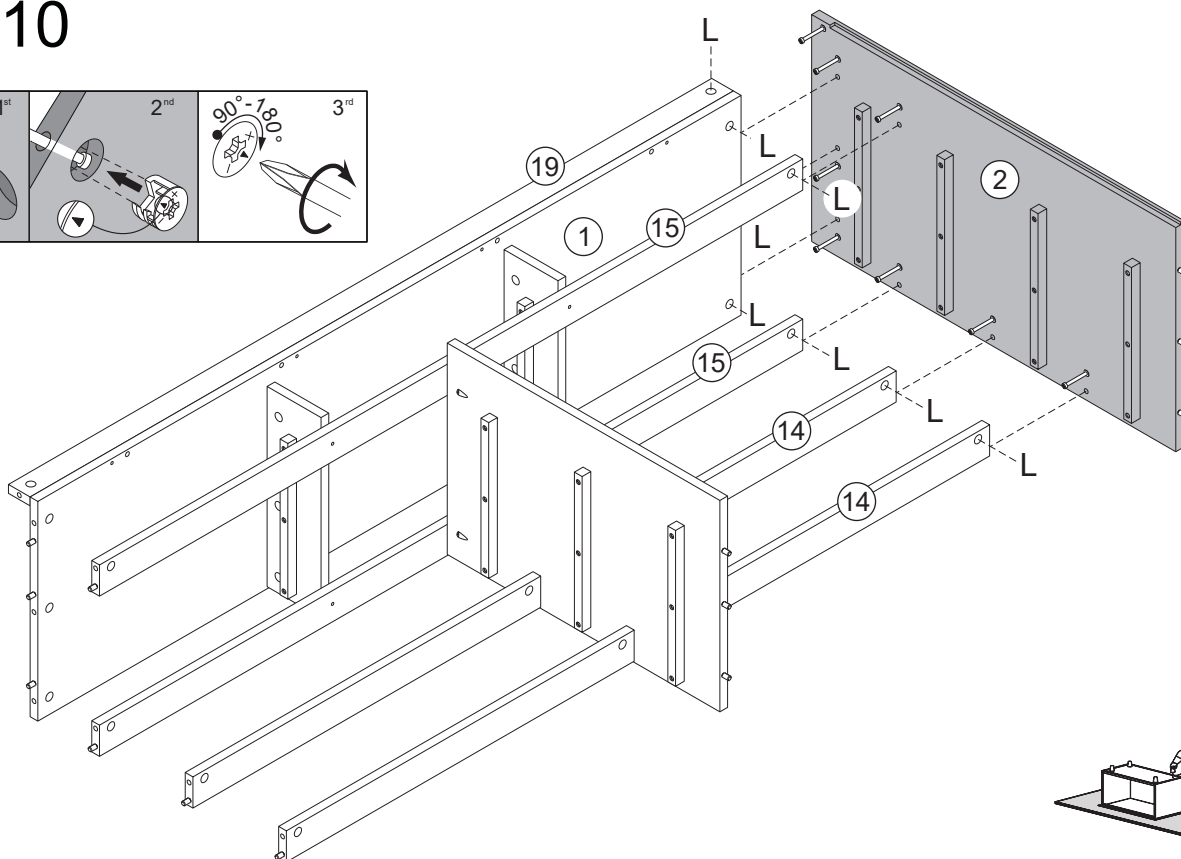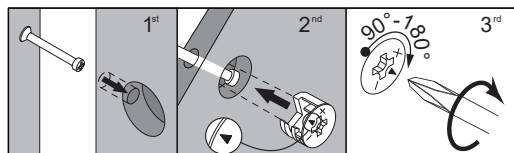

Secure parts 1, 14, 15 and 19 to part 2. Insert cam locks (L) into parts 1, 14, 15, 19, and tighten with a phillips screwdriver.

L		Ø15*11mm	08
---	---	----------	----




# Step 11

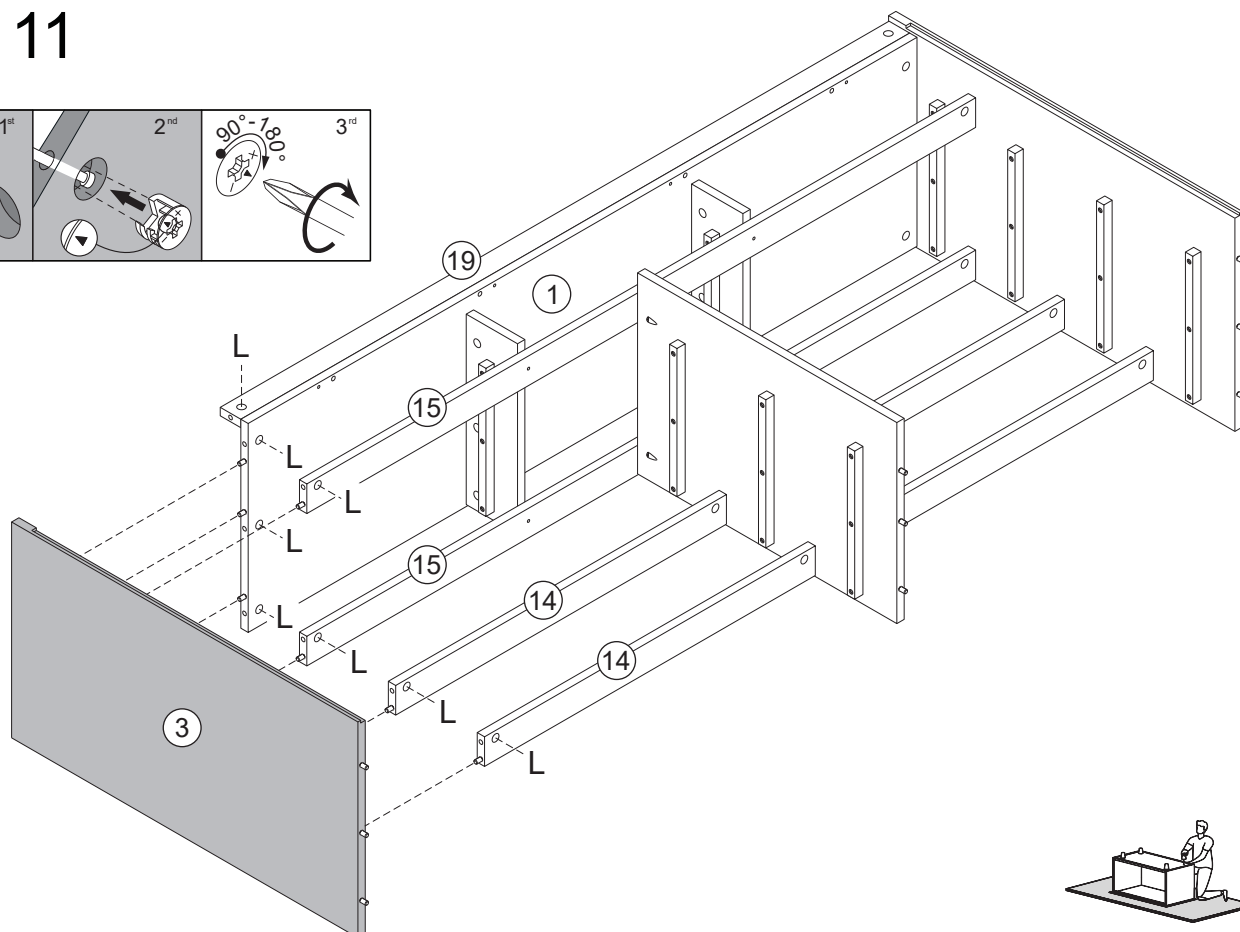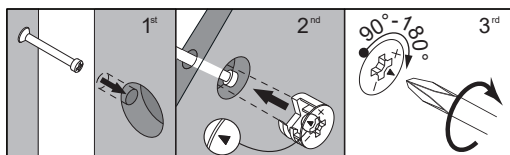

Secure parts 1, 14, 15 and 19 to part 3. Insert cam locks (L) into parts 1, 14, 15, 19, and tighten with a phillips screwdriver.

L		Ø15*11mm	08
---	--	----------	----


# Step 12

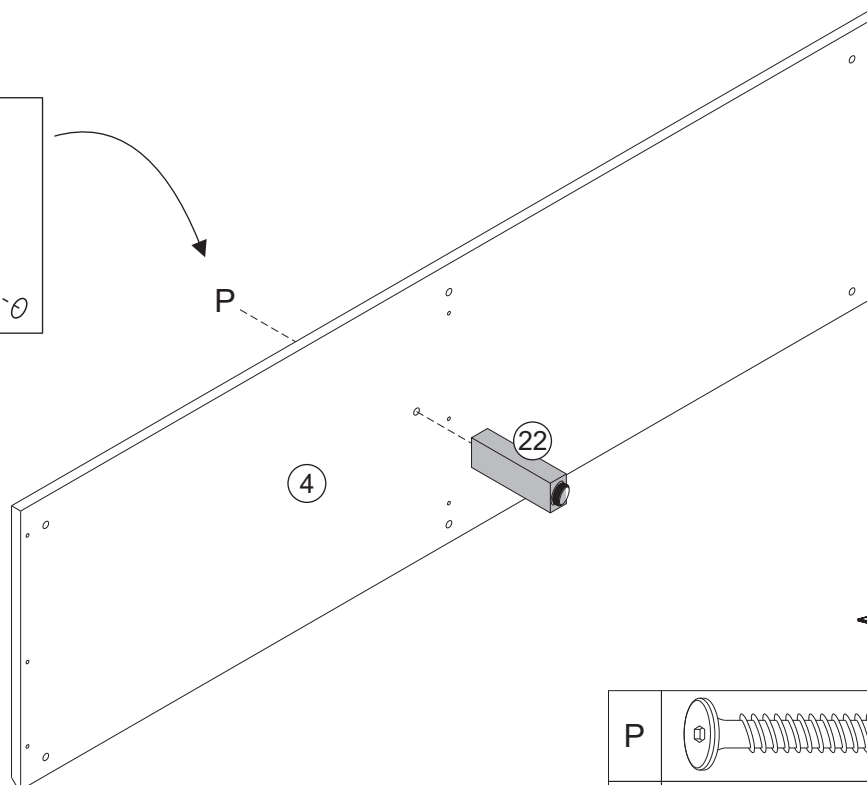


Attach part 22 to part 4 with screw (P) and hex key (Q).

P		Ø7,0*50mm	01
Q			01


## Step 13

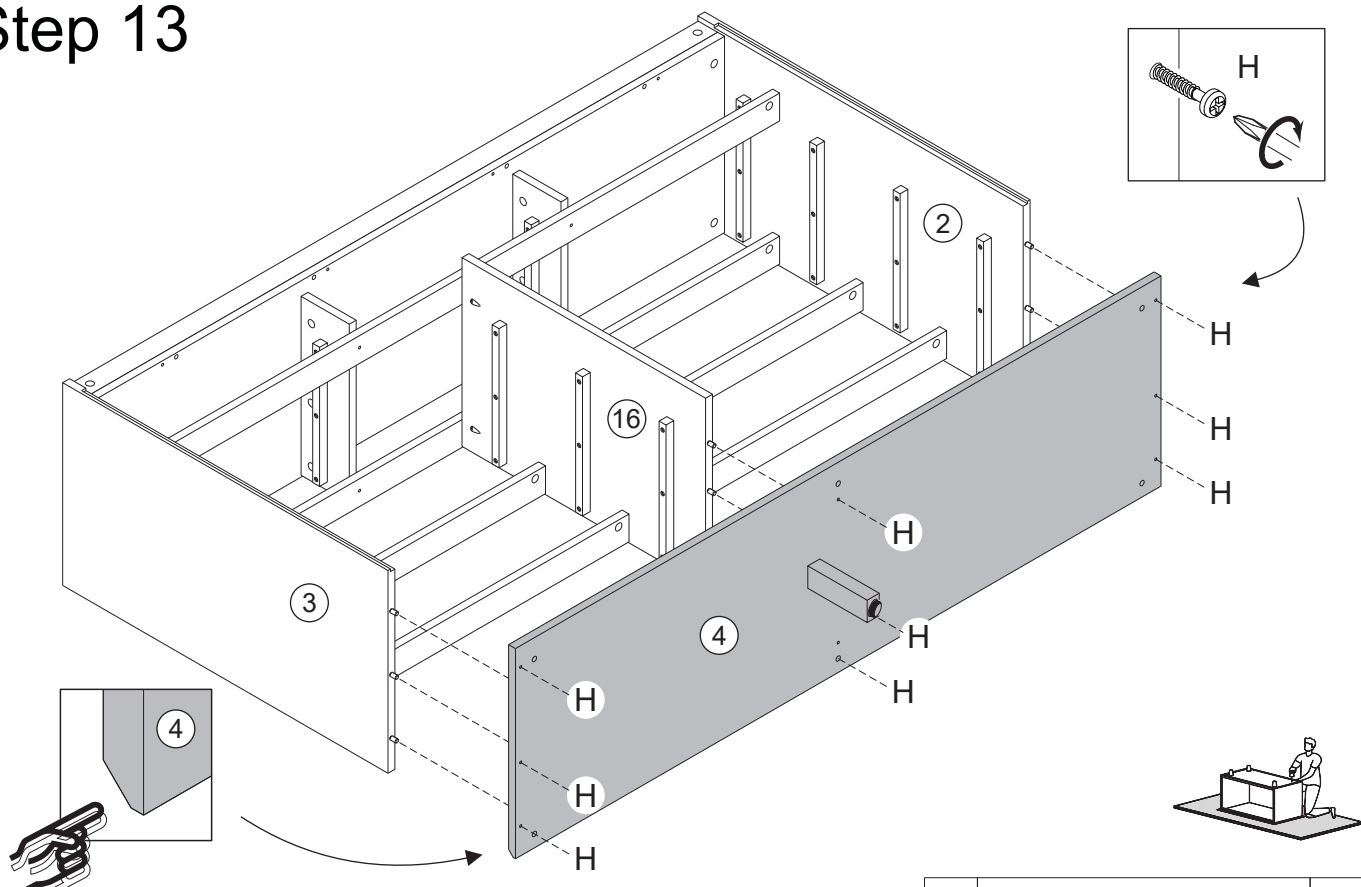


Secure part 4 to parts 2, 3 and 16 with screw (H) and phillips screwdriver.

H		09
Ø4,0*40mm		


## Step 14

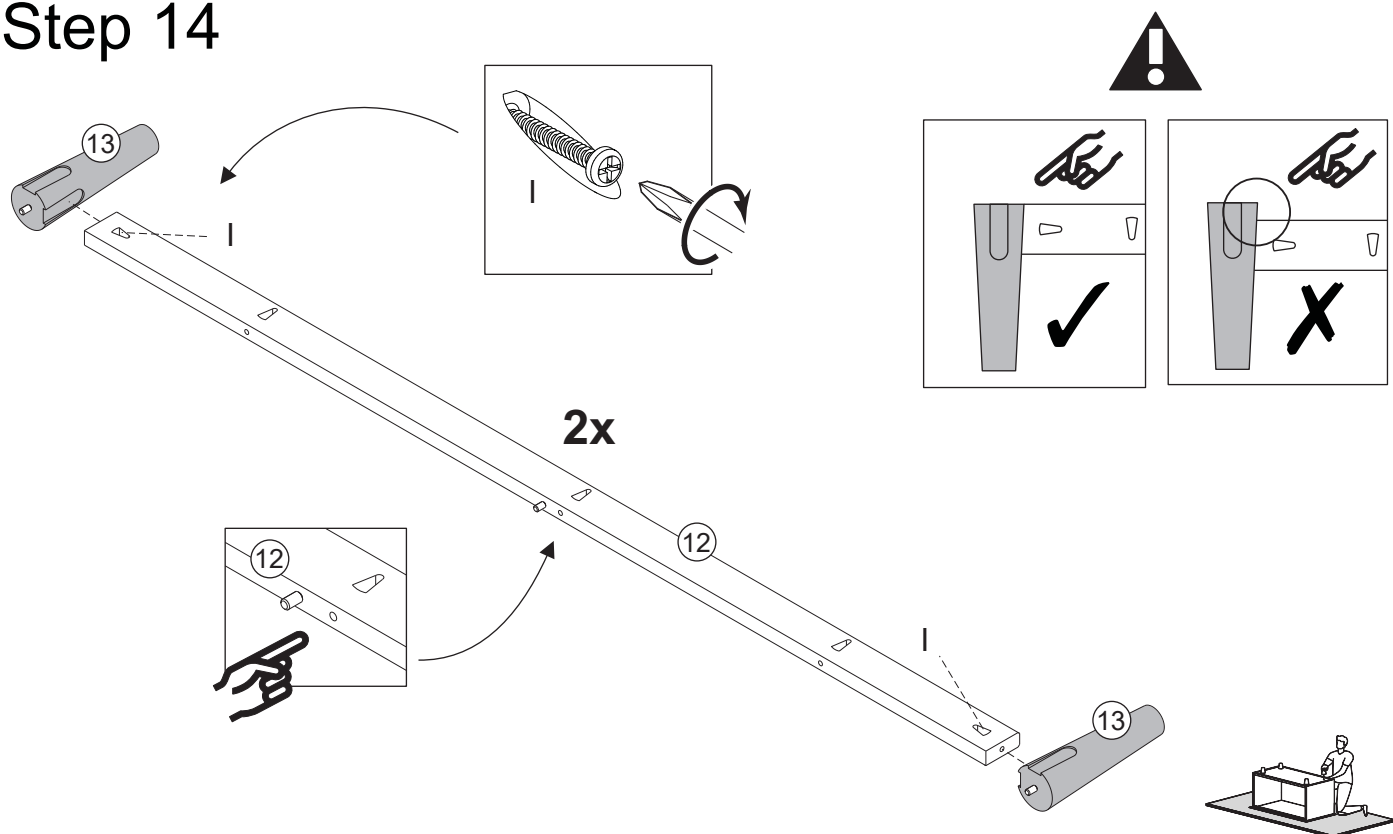


Secure part 12 to parts 13, with screw (I) and phillips screwdriver.

I		04
Ø4,5*50mm		


## Step 15

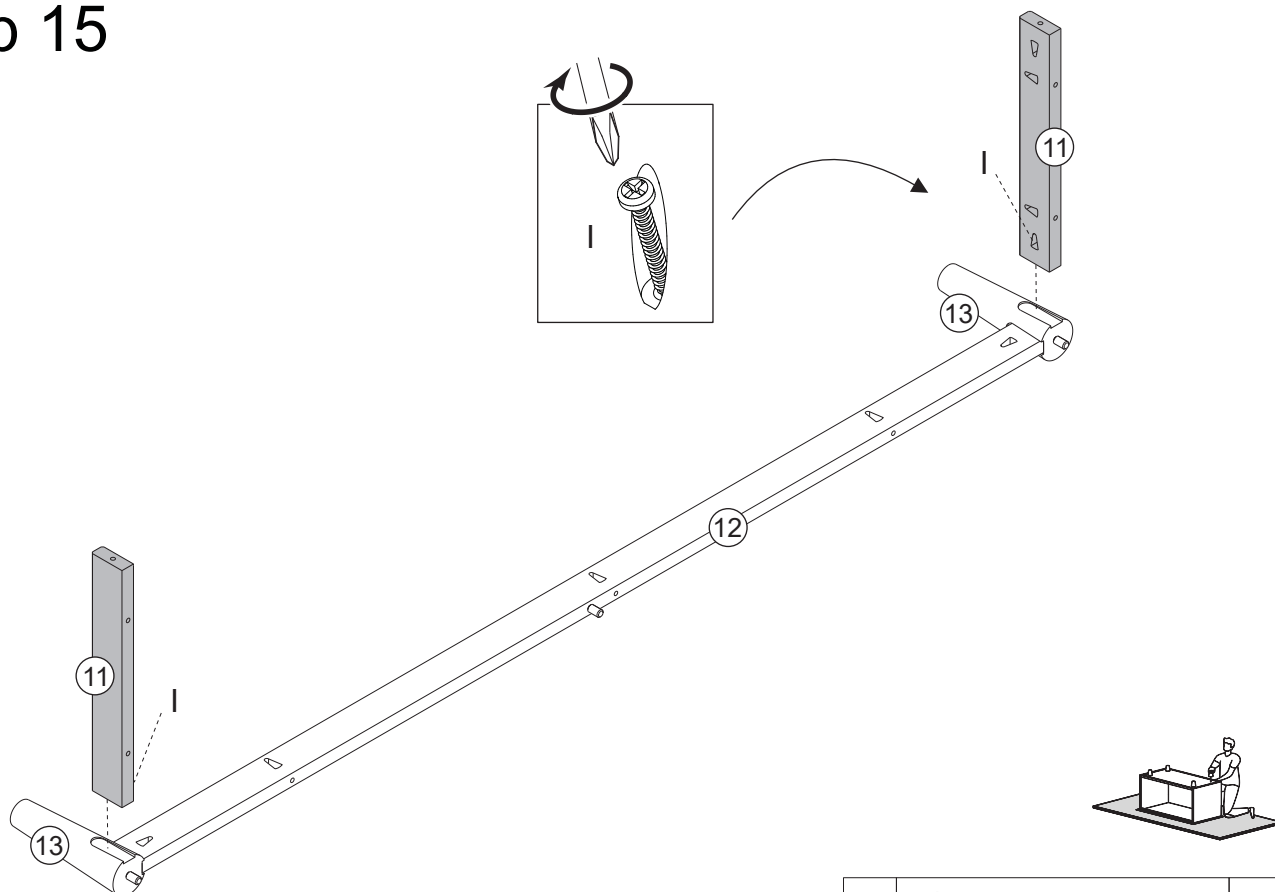


Secure part 11 to parts 13, with screw (I) and phillips screwdriver.




## Step 16

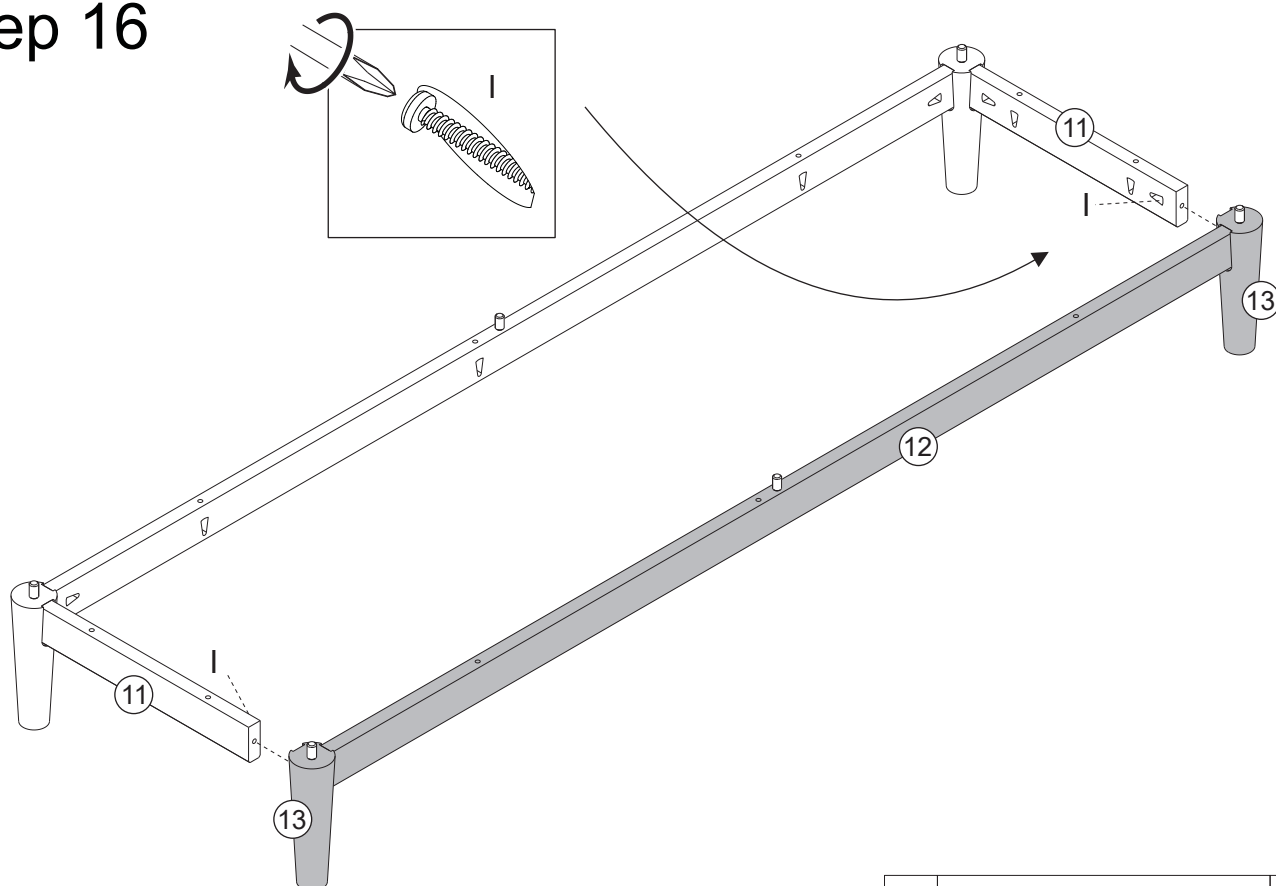


Secure part 11 to parts 13, with screw (I) and phillips screwdriver.




## Step 17

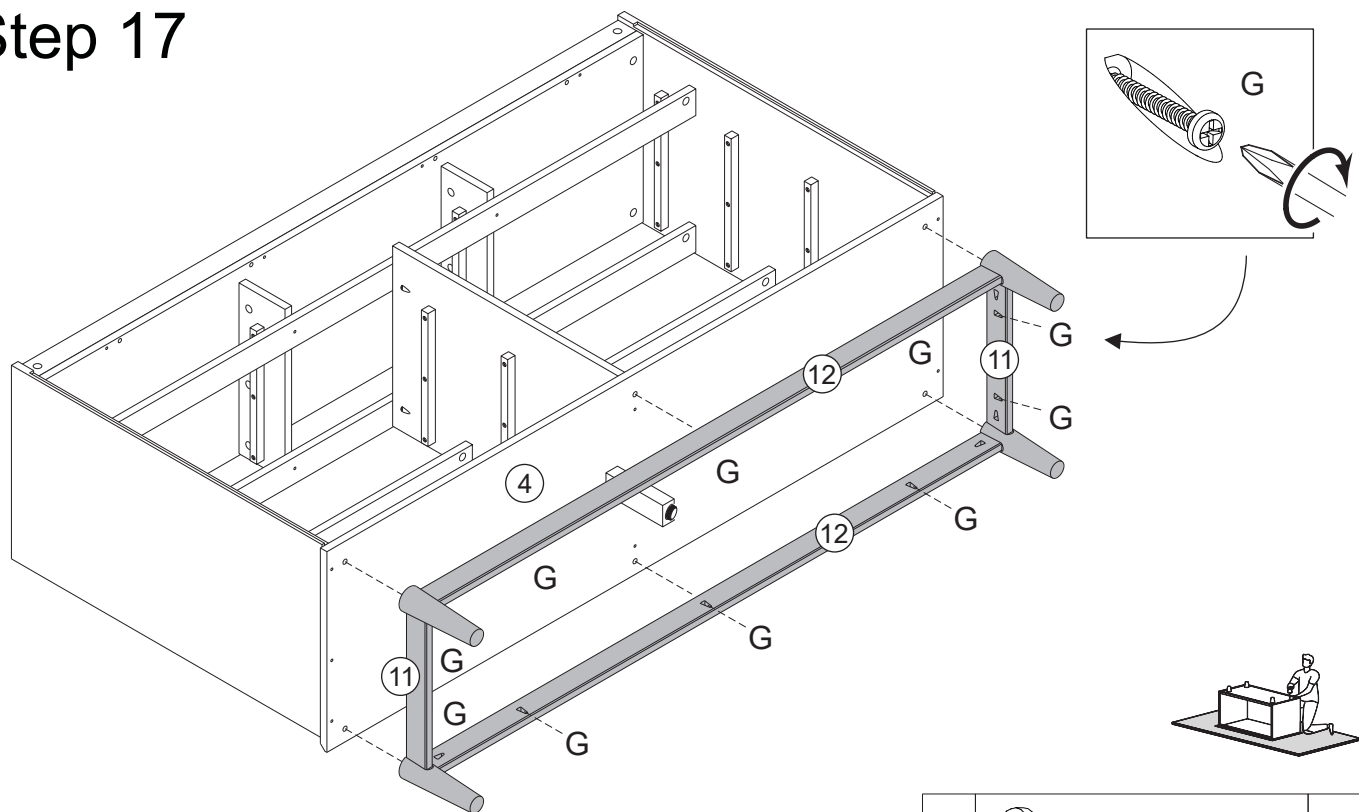



Secure parts 11 and 12 to part 4 with screw (G) and phillips screwdriver.

G		10
Ø4,0*30mm		



## Step 18

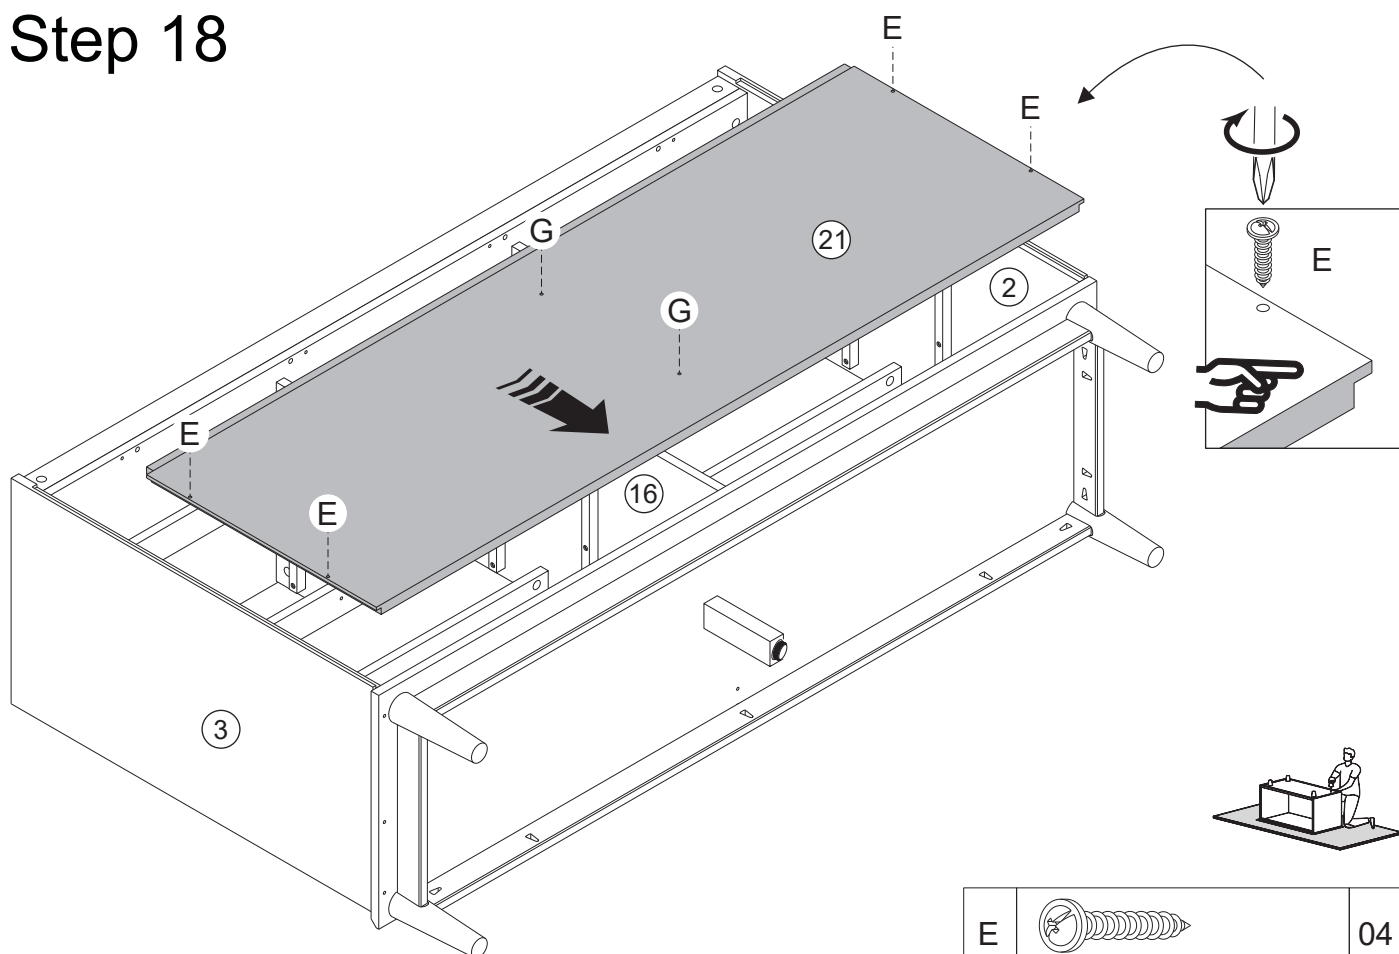

Secure back panel 21 to parts 2 and 3 as shown above with screw (E) and phillips screwdriver.  
Secure back panel 21 to part 16 with screw (G) and phillips screwdriver.


E		04
Ø3,5*20mm		
G		02
Ø4,0*30mm		

## Step 19

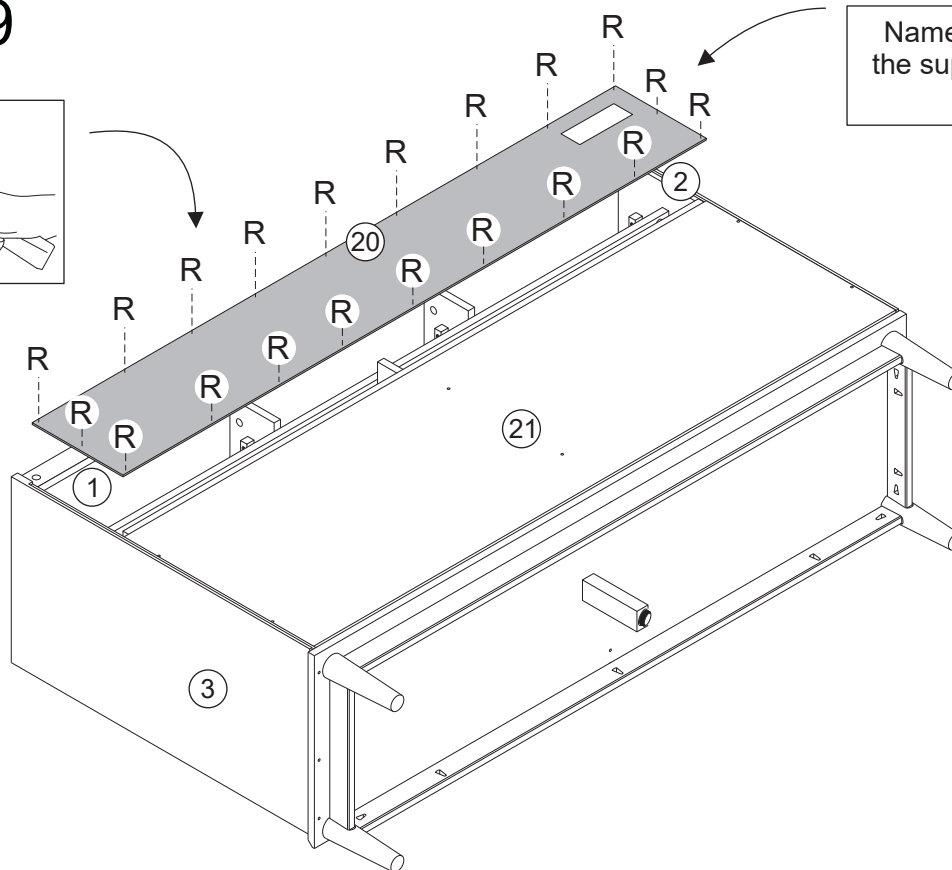




Name and address of  
the supplier and date of  
production.

Secure back panel up 20 to parts 1,2,3 and 21 as  
shown above with nails (R) and hammer.

R		20
		Ø8,0*8mm



## Step 20

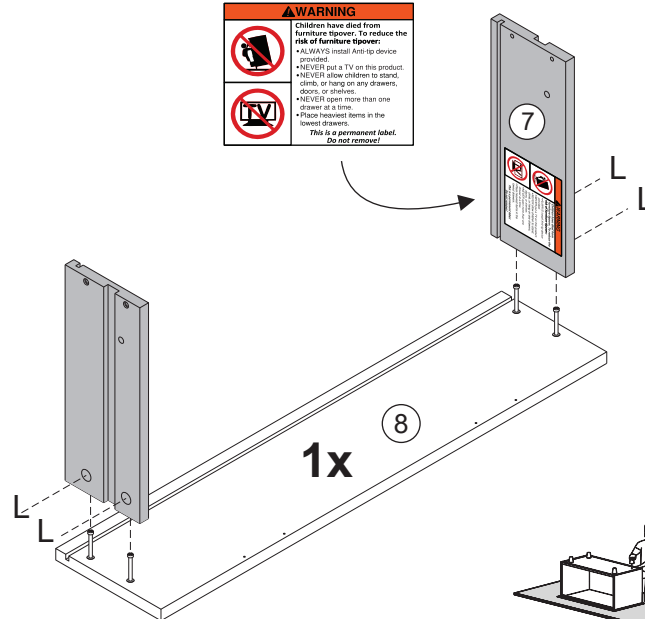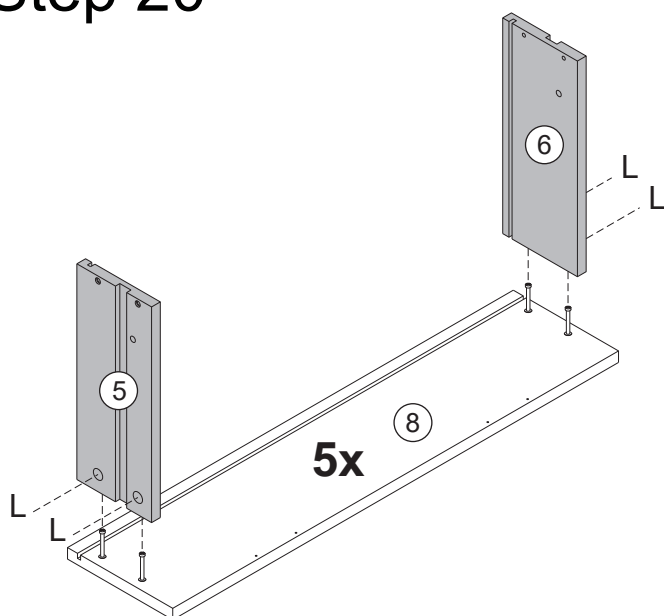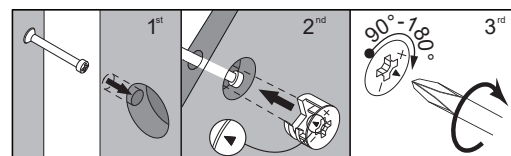


Secure part 5 and 6 to part 8.  
Secure part 5 and 7 to part 8.  
Insert cam locks (L) into parts 5, 6, 7, and tighten  
with a phillips screwdriver.


L		24
		Ø15*11mm




## Step 21

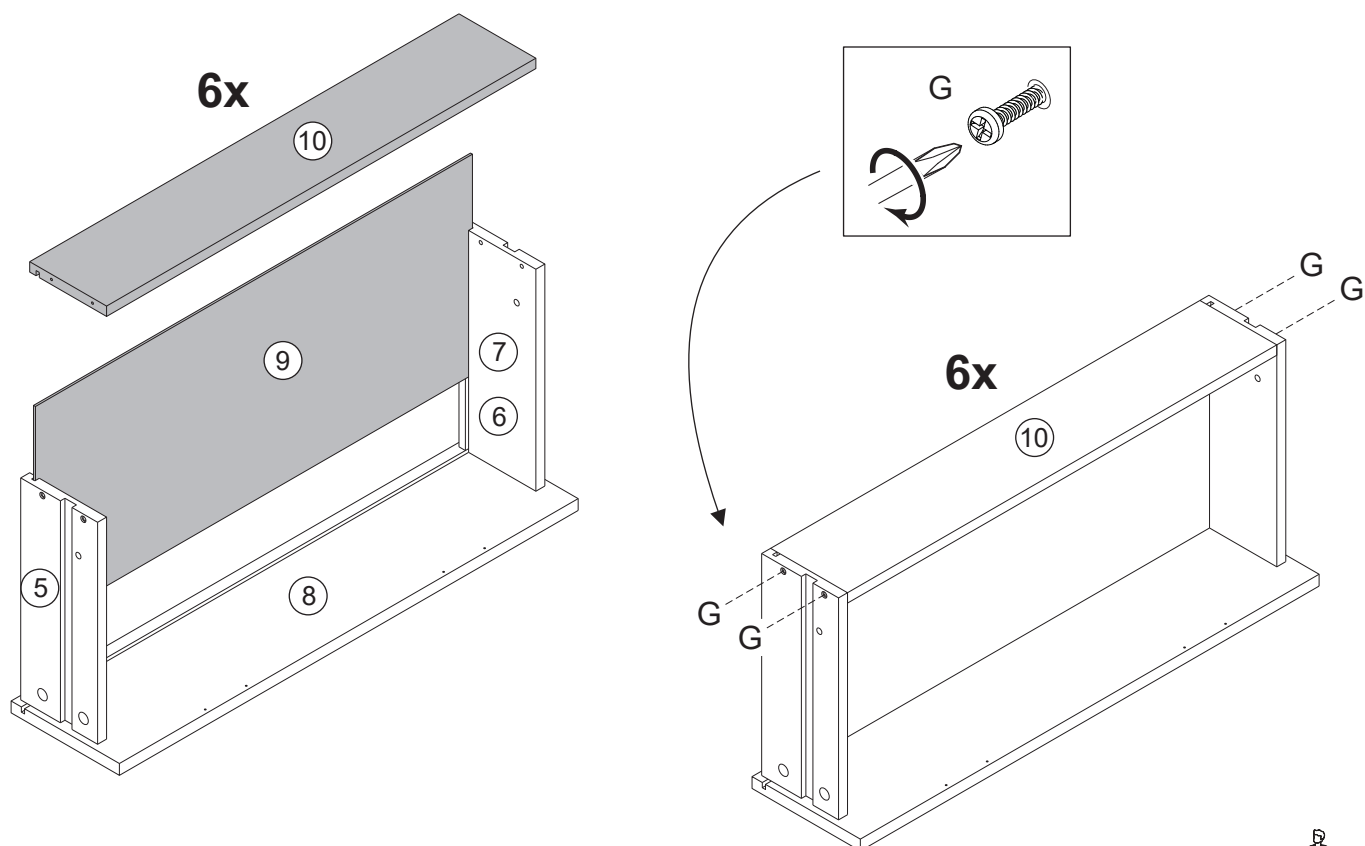



Insert parts 9 and 10 between parts 5, 6 and 7. Secure part 10 with screw (G) and phillips screwdriver.

G		24
Ø4,0*30mm		

## Step 22

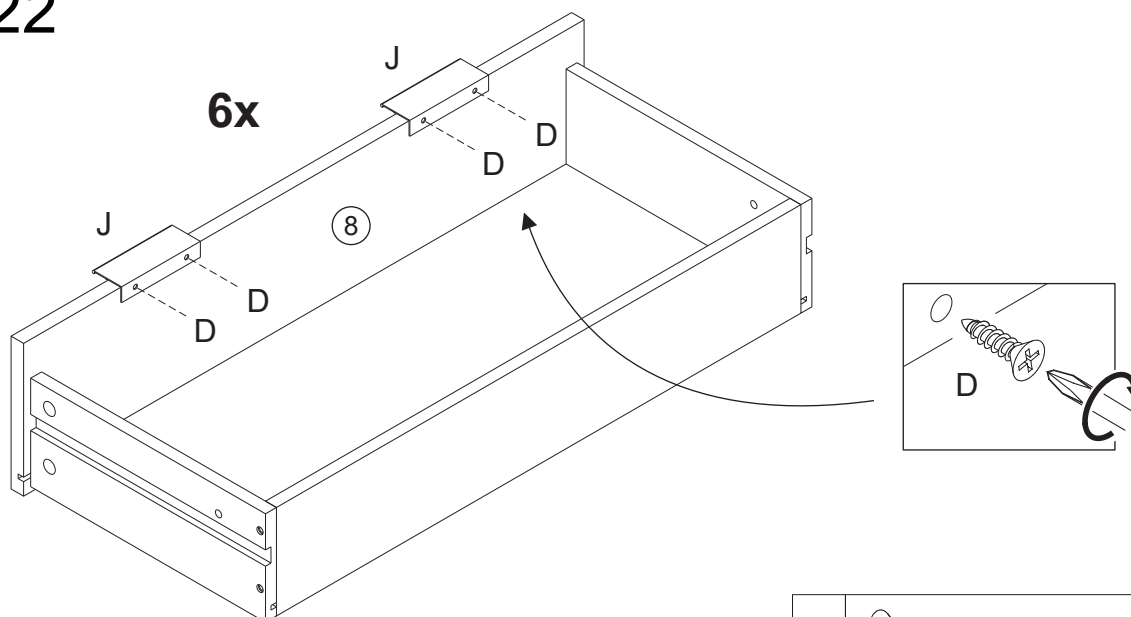


Secure handle (J) with screw (D) and phillips screwdriver, in the pre-drilled holes on the drawer front 8.


D		24
Ø3,0*12mm		
J		12




## Step 23

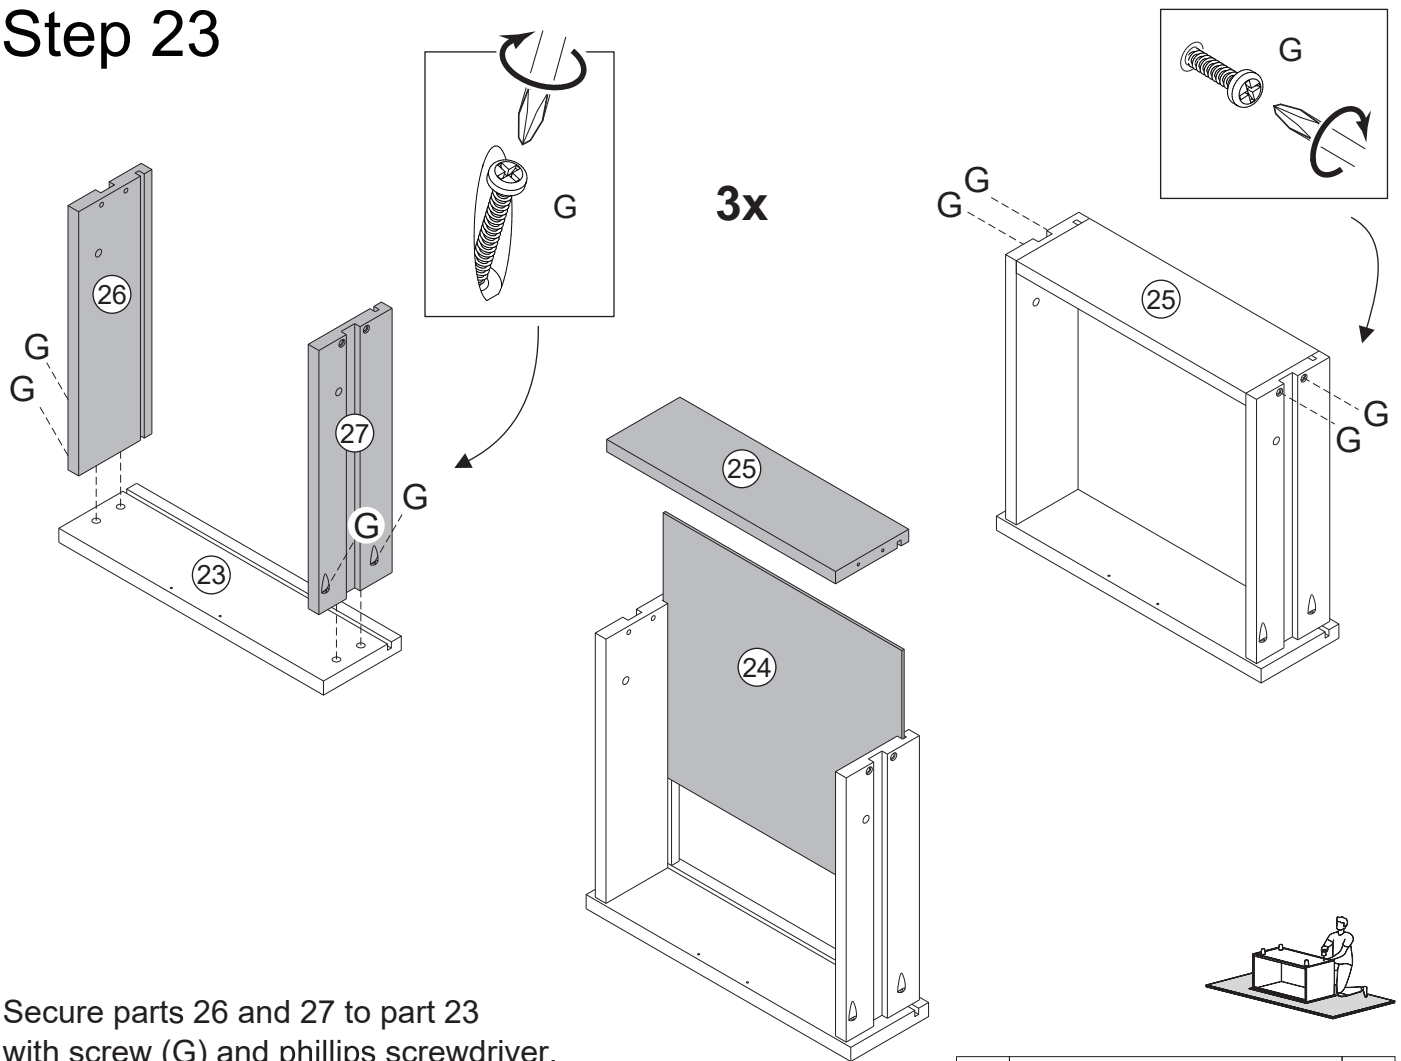



Secure parts 26 and 27 to part 23 with screw (G) and phillips screwdriver. Insert parts 24 and 25 between parts 26 and 27. Secure part 25 with screw (G) and phillips screwdriver.

G		24
Ø4,0*30mm		




## Step 24

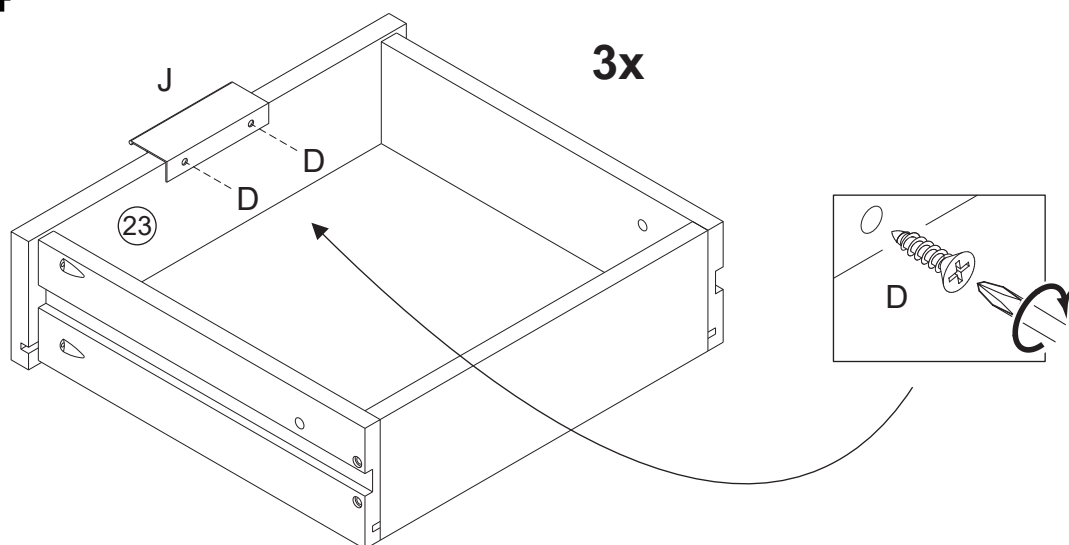

Secure handle (J) with screw (D) and phillips screwdriver, in the pre-drilled holes on the drawer front 23.

D		06
Ø3,0*12mm		
J		03



## Step 25

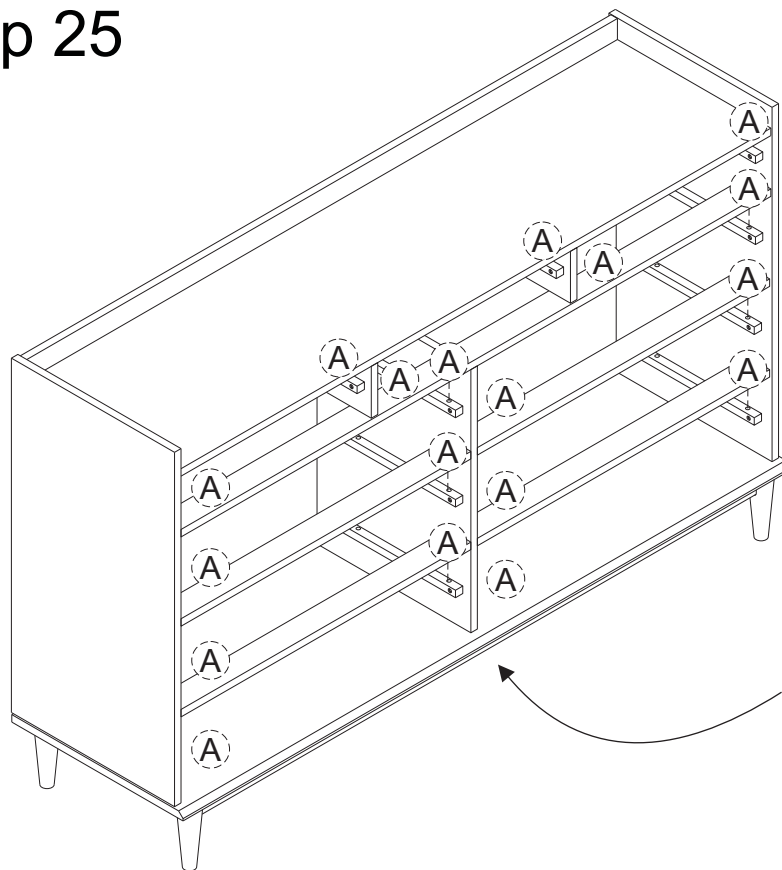

Insert wood dowel (A) into part 17 to be the stop of the drawer.




## Step 26

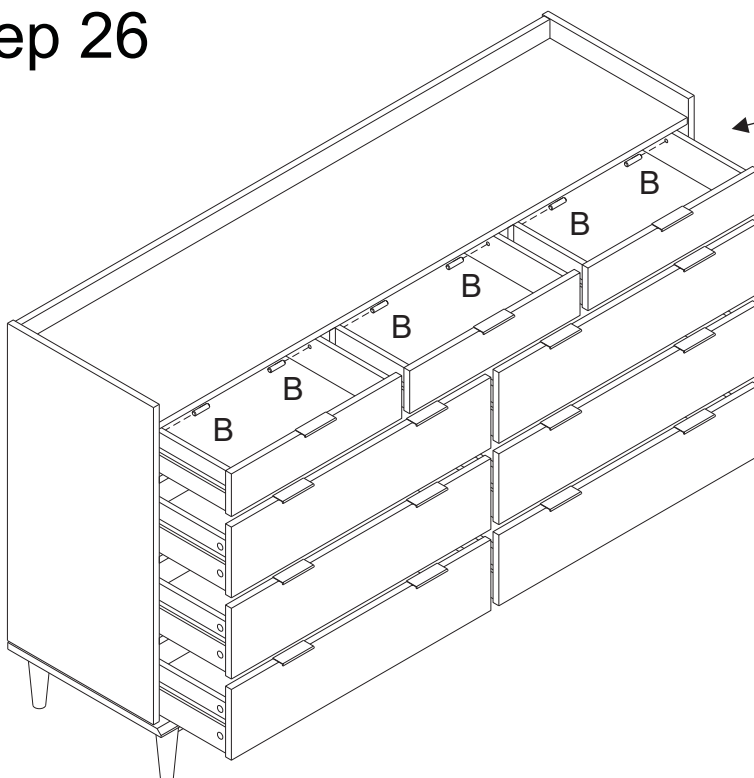

The assembled drawer with this warning must be placed on top of the unit.

Insert wood dowel (B) on the inside of all drawers, with the drawer inside the unit, after having passed the wood dowel that is in the drawer slide.

The dowel is not flush with the panel, it is a little inside the drawer to help when you need to remove the lock dowel to remove the drawer.




## Step 27




## WARNING

**Serious or fatal injuries can occur from furniture tipping over. To prevent the furniture from tipping over we recommend that it is permanently fixed to the wall.**

**Wall anchor and hardware are included with this product. Please make sure hardware is suitable for your walls before installing, as different wall materials may require different types of anchors.**




Attach part (O) with Screw (E) and Washer (N), in the frame of top panel unit.

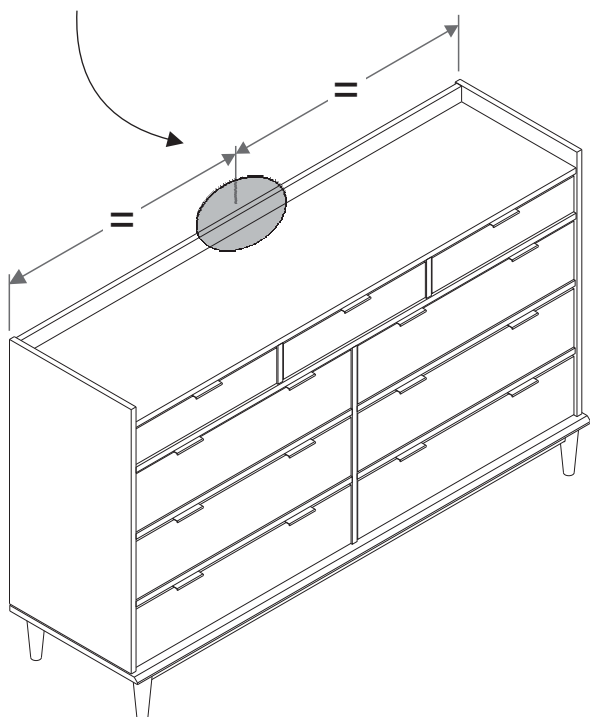


With drilling machine make one hole in the wall, Insert part (M) in the hole.  
Secure part (O) with Screw (G), and Washer (N), in the wall.

E		01
G		01
M		01
N		02
O		01

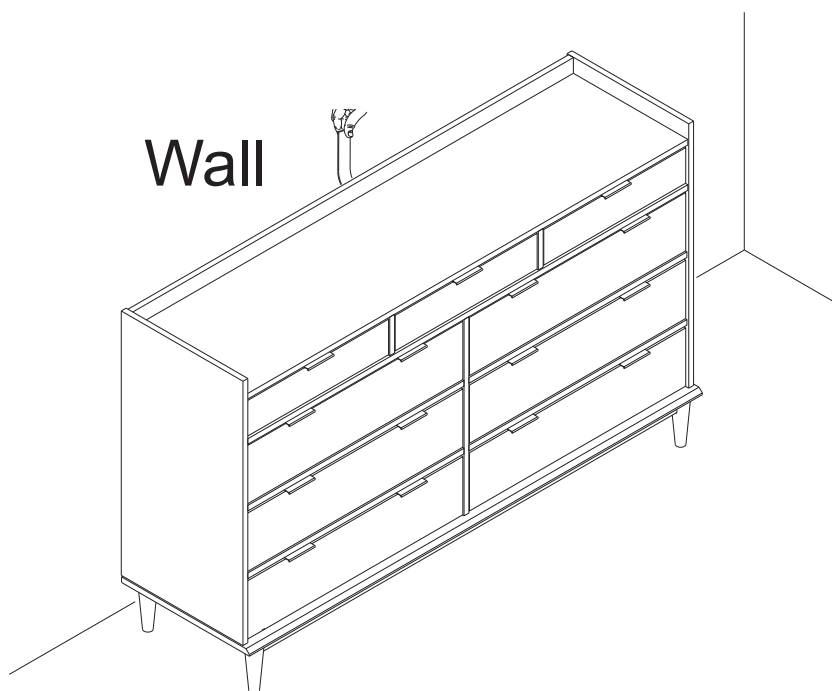

Name and address information for the manufacturer responsible for the anti-tip hardware and date of production can be found on the label on the back of the furniture.

## Step 28

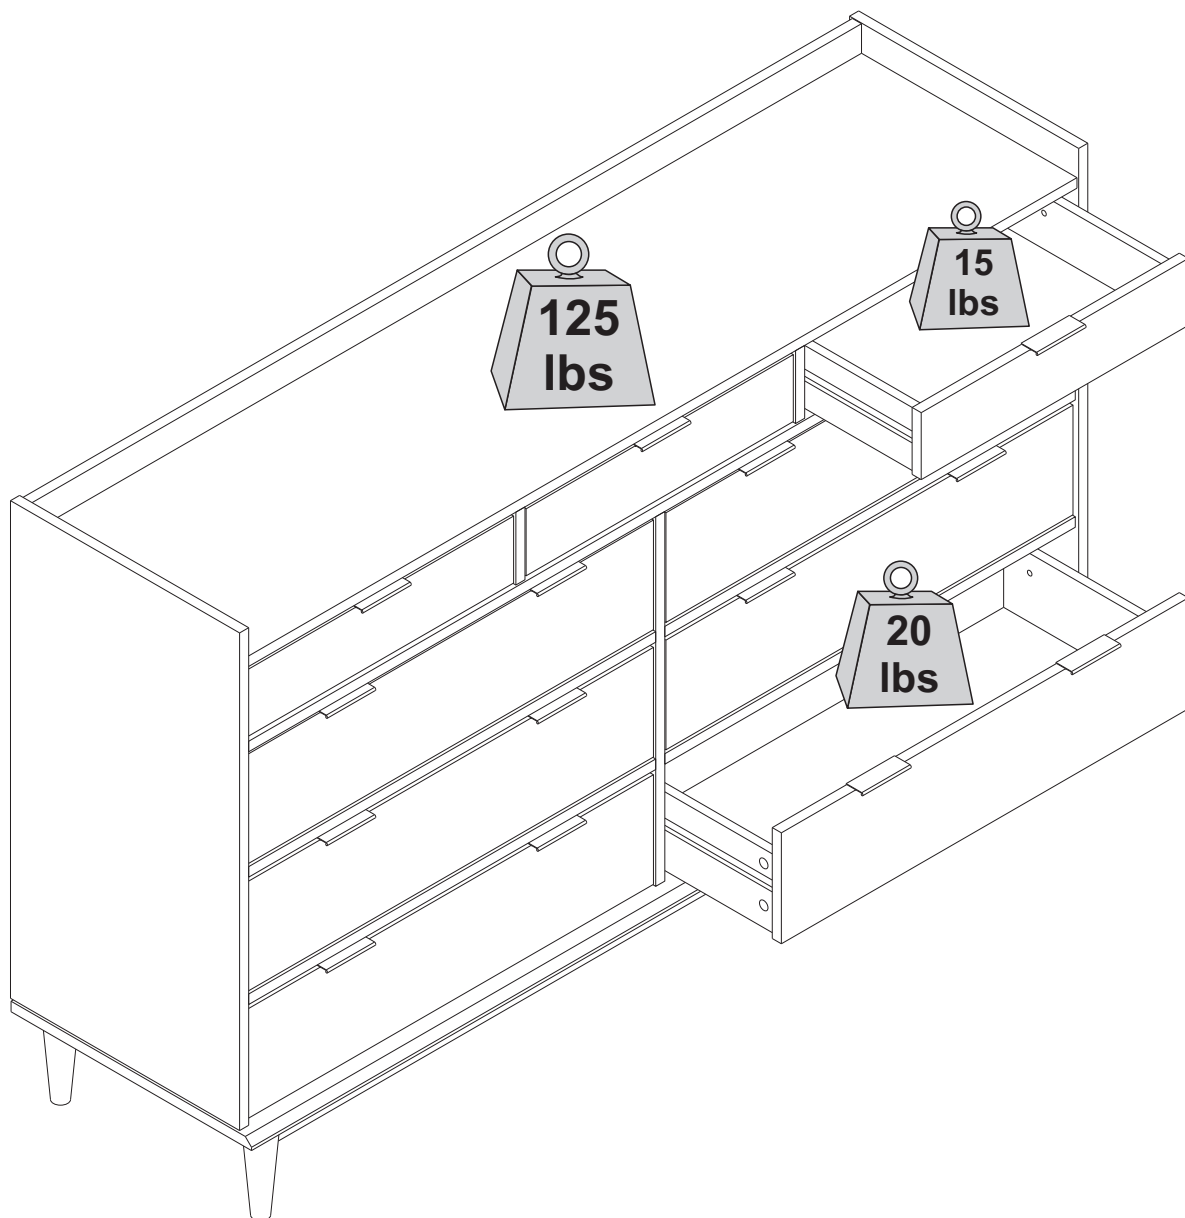

**Assembly Complete!**