

24" 3-Burner Electric Cooktop

KM 5820



24" 3-Burner Electric Cooktop KM 5820





KM 5820 Features:


- New 3D glass design
- Direct Selection touch controls
- High-impact black Ceran glass surface with stainless steel frame
- Residual heat indicators for all zones
- Single and variable zones with over 25% increased power
- Auto-heat reduces heat-up time

SPECIFICATIONS	·				
KM 5820 Electric Cooktop (240V)	Item 26582050USA				
KM 5820 Electric Cooktop (208V)	Item 26582051USA				
Product Dimensions	24 ⁵ / ₈ " (626 mm) W x 2 ¹¹ / ₁₆ " (68 mm) H x 21 ⁷ / ₁₆ " (544 mm) D				
Cut-out Dimensions	$22^{5}/_{16}$ " (567 mm) W x $20^{3}/_{8}$ " (518 mm) D				
Minimum Back Spacing From Wall	2" (50 mm)				
Minimum Countertop Thickness	1 ³ / ₁₆ " (30 mm)				
Electrical					
Electrical Requirements	208/240V, 60Hz, 30A				
Power Cable	4' 8 ¹¹ / ₁₆ " (1.44 m)				
Shipping					
Shipping Weight	39 lbs (17.7 kg)				
Shipping Dimensions	26" W x 6 ⁵ / ₁₆ " H x 29 ² / ₁₆ " D				
Support					
Call Miele	800.843.7231				
Miele Website	ூwww.mieleusa.com				
20/20 Link	√2020technologies.com				



PRODUCT VIEWS

Top View

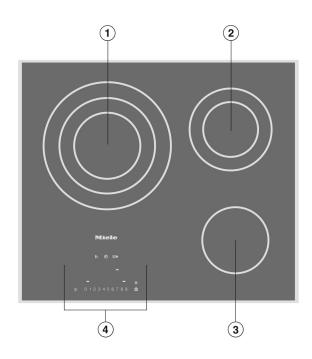


- 1) Three-zone variable burner
- 2 Two-zone variable burner
- 3 One-zone burner
- 4 Control panel

Burner	ØI	Diameter	Output in watts at		
	inches	cm	208 / 240 V		
Left ①	5 11/16" 8 1/4" 10 5/8"	14.5 21 27	1100 2150 3100		
Right rear ②	4 3/4" 7 1/16"	12 18	700 1800		
Right front 3	5 11/16"	14.5	1200		
			Total:6100		



INSTALLATION DIMENSIONS

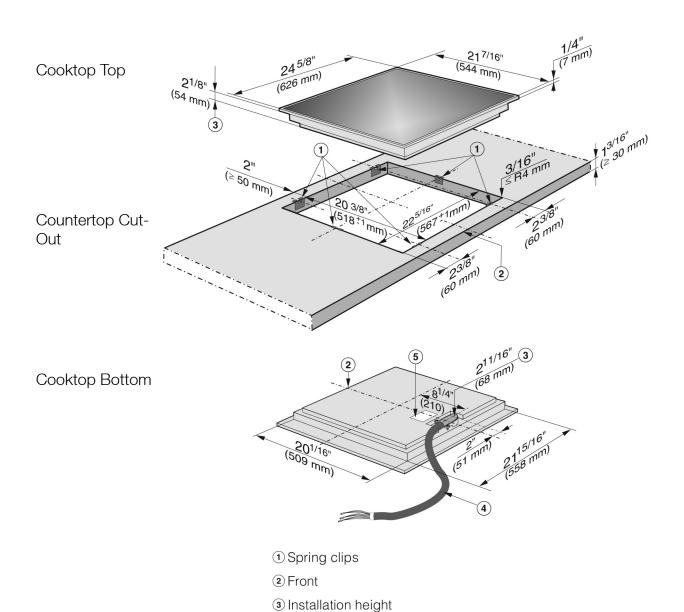

S Rating label

4 Connecting cable, L = 56 11/16" (1440 mm)

24" 3-Burner Electric Cooktop KM 5820



KM 5820 COOKTOP INSTALLATION IN COMBINATION WITH UNDERCOUNTER 30" MIELE OVEN H6x80BP

Countertop Thickness vs. Toekick Height

Taken into consideration:

- 341/2" tall cabinetry
- 1/4" of cooktop above countertop (proud)
- 3/4" (exact) platform thickness under oven/above toekick

		Toekick Height (Inches)										
		31/2	33/4	4	41/4	41/2	4 3/ ₄	5	51/4	51/2	5 ³ / ₄	6
Countertop Thickness (Inches)	1 3/ ₁₆	OK	OK	OK	OK	OK	OK	OK	OK	OK	NA	NA
	1 1/ ₄	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	NA
	11/2	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
	1 3/ ₄	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
	2	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK

