
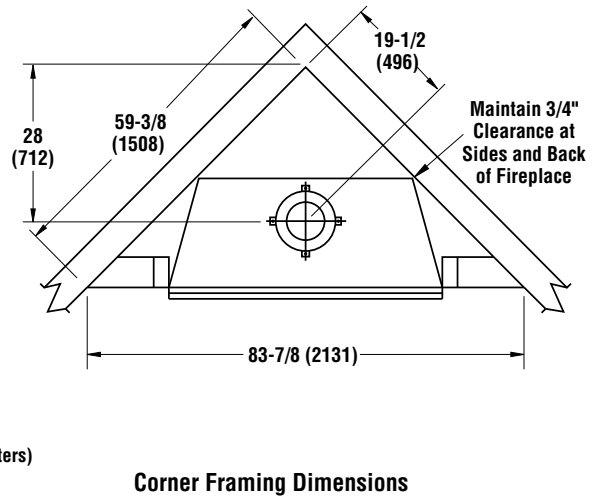






CRAFTSMAN™ 42 SERIES

WOOD-BURNING FIREPLACES

Framing Dimensions

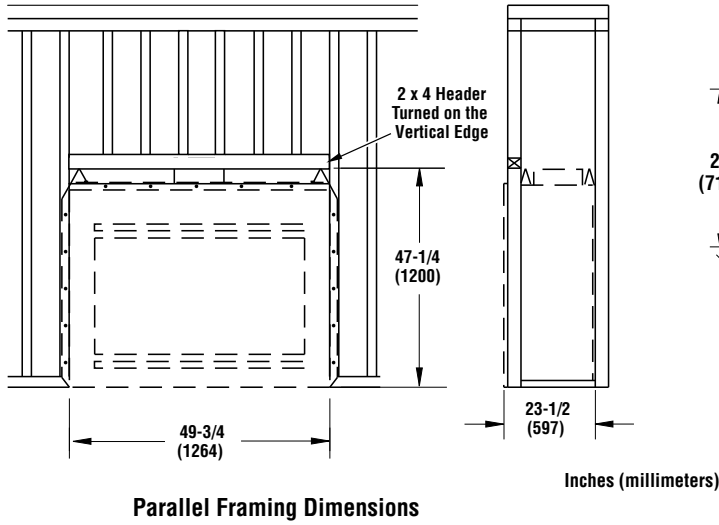

Fireplace Dimensions

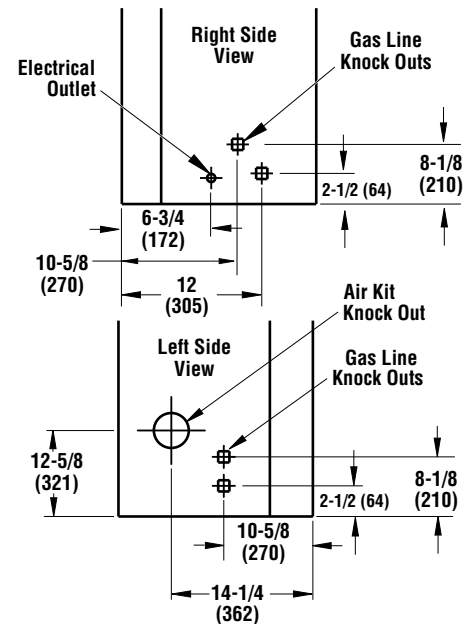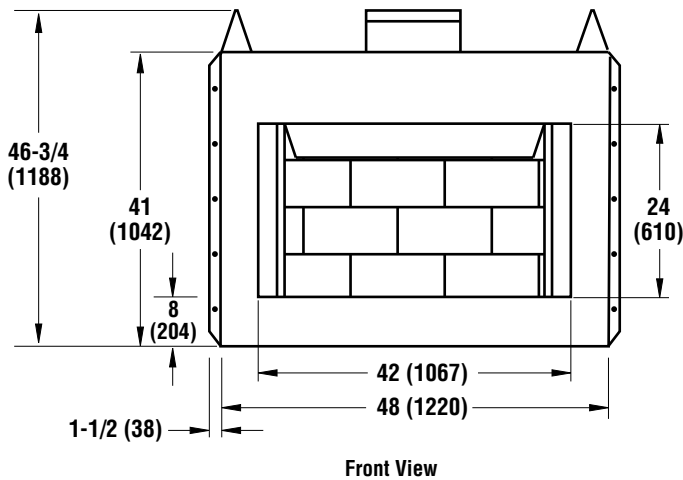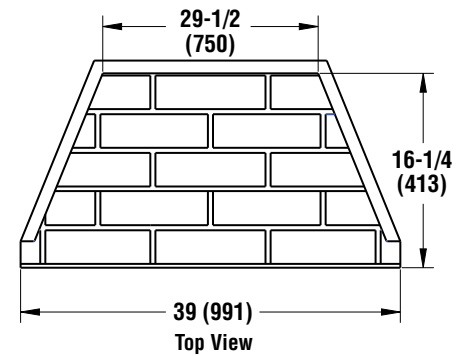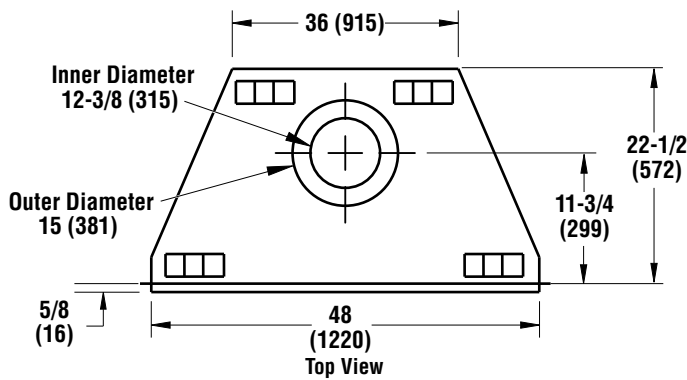

Inches (millimeters)

CRAFTSMAN™ 42 SERIES

Product Information

Product Reference Information					
Cat. No.	Model	Description	Interior	Shipping Weight	Shipping Volume
F0712	Craftsman42P2	Radiant	WS	184 lb.	23.8 cu. ft.
F0715	Craftsman42P2	Louvered	WS	184 lb.	23.8 cu. ft.

PFS
C US
Report No. 10-078

This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.



Listing Information

Clearances

Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	3/4 (19)*
Floor	0 (0)**
Perpendicular wall to opening	12 (305)
Top spacers	0 (0)
Chimney outer pipe surface	1 (26)

* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

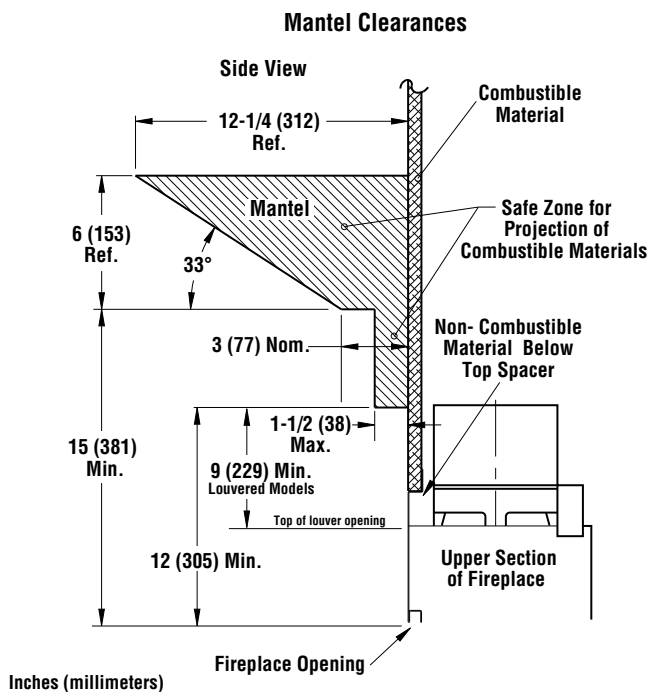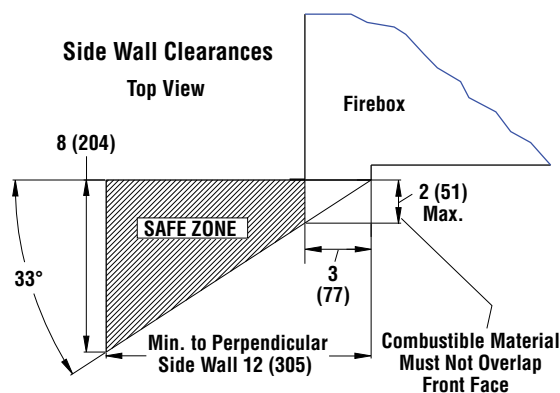

Venting

Venting
Uses Standard (8DM) and Hi-Temp (8HT) Wood-Burning Chimney. For Canada Use 8HT Chimney

