


# Aspirations™
## Single Control Wall Mount Faucet

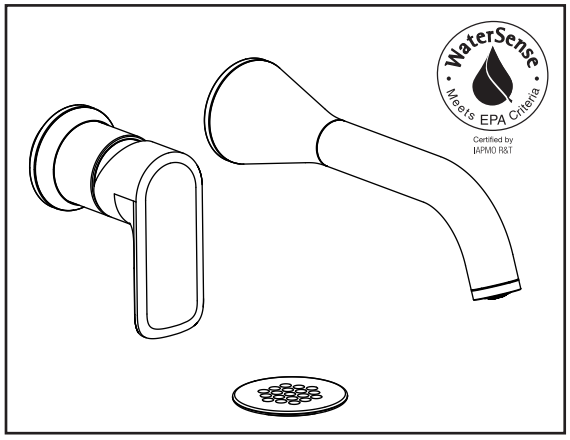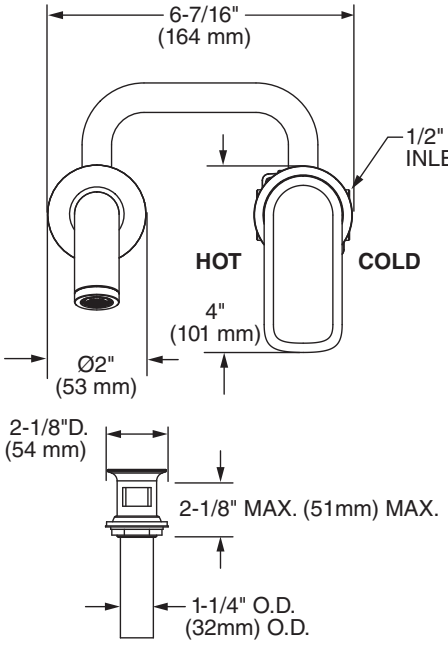


### MODEL NUMBER:

❑ **7061461 Single Control Wall Mount Faucet.**

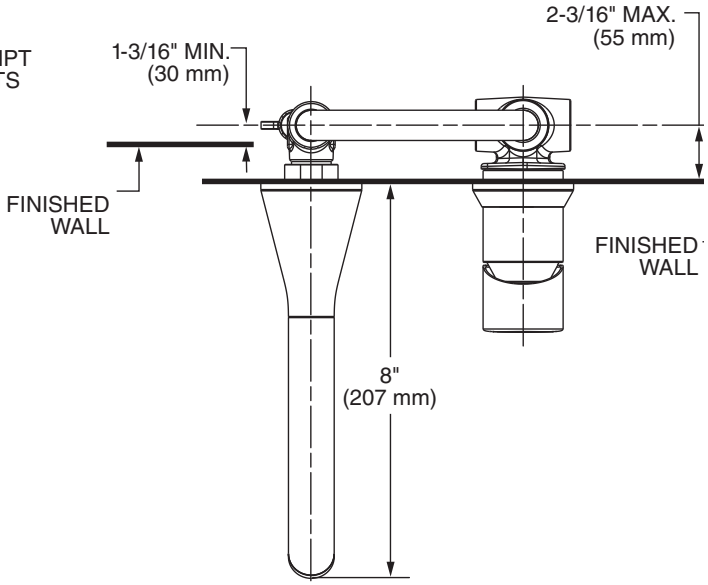


## GENERAL DESCRIPTION:

Single lever control faucet with cast brass valve body set 4 3/8" apart. 35mm washerless ceramic disc valve cartridge with integral hot limit safety stop. Metal spout and zinc lever handle. All brass grid drain body with 1-1/4" (32mm) tailpiece. 1.2 gpm/4.5 L/min. maximum flow rate.

## PRODUCT FEATURES:

**Brass Construction:** Durable. Easy to clean. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

## SUGGESTED SPECIFICATION

One-handle in-wall lavatory faucet shall feature cast brass valve body. Shall also feature a washerless ceramic disc valve cartridge with integral hot limit safety stop. Fitting shall be American Standard Model #7061461.XXX.


© 2022 AS America, Inc.

# Aspirations™
## Single Control Wall Mount Faucet

## CODES AND STANDARDS

These products meet or exceed the following codes and standards:

**ANSI A117.1**
**ASME A112.18.1**
**CSA B125.1**
**NSF/ANSI/CAN 61: Q<1**
**NSF/ANSI/CAN 372**

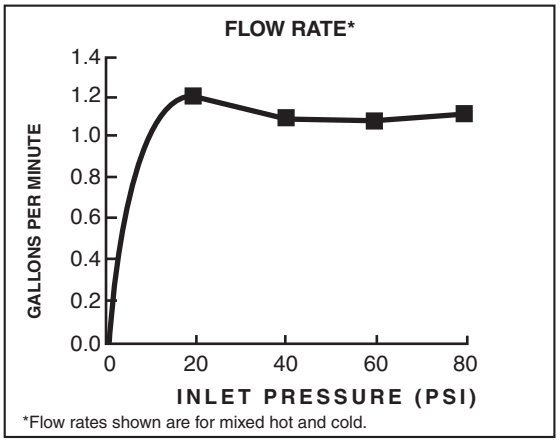

*Flow rates shown are for mixed hot and cold.

| Product Number | Description | Finish Options | | |
|---|---|---|---|---|
| | | Polished Chrome | PVD Brushed Nickel | Matte Black |
| | | 002 | 295 | 243 |
| 7061461 | Single Control Wall Mount Faucet ADA | ✓ | ✓ | ✓ |

ADA Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

PART OF LIXIL

© 2022 AS America, Inc.