
Document # PG01-007 Revised 05/25/10 Page 1/2



## Single, Distinctive Wall Oven




Product tolerances: ±1/16" (±1.6 mm) unless otherwise stated

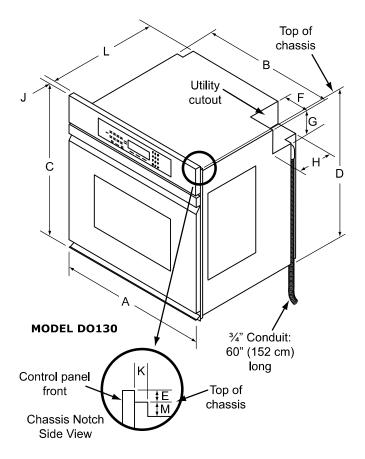

## **⚠** WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- This appliance must be installed in accordance with the accompanying installation instructions.



| (A) Overall<br>Width | (B) Chassis<br>Width | (C) Overall<br>Height | (D)* Chassis<br>Height | (E) Control<br>Panel<br>Overlay |
|----------------------|----------------------|-----------------------|------------------------|---------------------------------|
| 29 3/4"              | 28 3/8"              | 28 7/16"              | 27 1/2"                | 15/16"                          |
| (75.6 cm)            | (72.1 cm)            | (72 <u>.</u> 4 cm)    | (69.9 cm)              | (2.4 cm)                        |

<sup>\*</sup> To top of chassis notch behind control panel

|   | (F) Utility  | (G) Utility   | (H) Utility  | (J) Control | (K) Notch | (L) Chassis | (M) Notch |
|---|--------------|---------------|--------------|-------------|-----------|-------------|-----------|
|   | Cutout Width | Cutout Height | Cutout Depth | Panel Depth | Depth     | Depth       | Height    |
| Ī | 5"           | 5 ¼"          | 6"           | 1"          | 1 5/8"    | 24"         | 1"        |
|   | (12.7 cm)    | (13.3 cm)     | (15.2 cm)    | (2.5 cm)    | (4.1 cm)  | (61.0 cm)   | (2.5 cm)  |

| ELECTRICAL SPECIFICATIONS             |                      |  |
|---------------------------------------|----------------------|--|
| Dedicated Circuit<br>Requirements     | Total Connected Load |  |
| 240 Vac 60 Hz., 4-wire,***<br>30 Amp. | 5.3 kW (23 Amp.)     |  |

<sup>\*\*\*</sup> Two 120 Vac hot (L1 and L2), one neutral, one ground

The above specifications are for reference only. See the appliance data plate for exact specifications.



Phone: (800) 793-0093


Document # PG01-007 Revised 05/25/10 Page 2/2



## Single, Distinctive Wall Oven




Cabinet/countertop tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

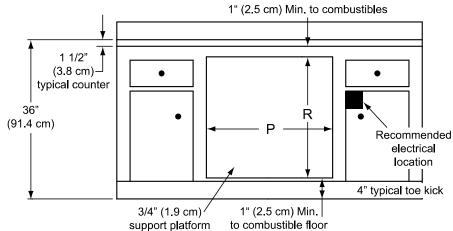

## **SINGLE WALL OVEN - INSTALLED UNDER COUNTER**

Minimum Interior Cabinet Depth: 24" (61.0 cm)

| (N) Minimum<br>Cabinet<br>Width | (P) Minimum<br>Cut Out Width | (R) Minimum<br>Cutout Height |  |
|---------------------------------|------------------------------|------------------------------|--|
| 30"                             | 28 ½"                        | 27 5/8"                      |  |
| (76.2 cm)                       | (72.4 cm)                    | (70.2 cm)                    |  |

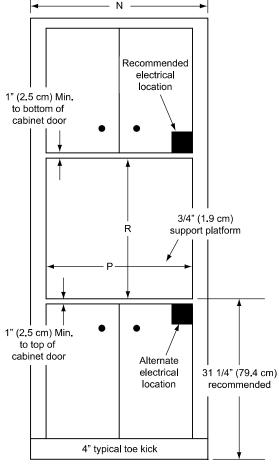

**SINGLE WALL OVEN - CUTOUT DIMENSIONS** 

Phone: (800) 793-0093