



Home Comfort

FRA08PZU1

Compact Slide-Out Chassis Air Conditioner/Heat Pump



Signature Features

Effortless™ Temperature Control

Our air conditioners maintain the preset room temperature, so you will remain comfortable at all times.

Supplemental Heating Option

Our versatile unit offers a supplemental heating capability, providing you with an additional heat source when needed.

Ready-Select® Controls

Easily select options with the touch of a button.

Remote Control

Allows you to precisely control the temperature and fan speed from across the room.

Product Dimensions

Height	15-3/8"
Width	22-5/8"
Depth	23-5/16"

More Easy-To-Use Features

Effortless™ Clean Filter

Our antibacterial filter reduces bacteria, room odors and other airborne particles for a cool, comfortable environment.

Multi-Speed Fan

Features three different fan speeds, for more cooling flexibility.

Sleep Mode

Quiet operation keeps you cool without keeping you awake. Plus, Sleep Mode gradually increases room temperature after being activated.

Quickly Cools

Quickly cool a room on hot days.

Comfort Control Design

Easily control the direction of your cool air, wherever your unit is.

Effortless™ Restart

Automatically resumes operating at its previous settings when power is restored to your unit.

Clean Filter Alert

Notifies you when your filter needs to be cleaned.

Power Cord

Comes with an extra long three-prong cord — makes extension cords unnecessary.

SpaceWise® Adjustable Design Optional Side Panels

Extend so you can adjust your unit to fit your window.


24-Hour On/Off Timer

Keep things cool on your schedule.


Performance	BTUs
Cool	8,000
Heat	3,500
Heat Pump	7,000

Performance	
BTU (Cool)	8,000
BTU (Heat)	3,500
BTU (Heat Pump)	7,000
Dehumidification (Pints/Hour)	1.5
Cool Area (Sq. Ft.)	350
Energy Efficiency Ratio	9.8
Electrical	
Volts	115
Amps (Cool)	7.4
Amps (Heat)	11.6
Amps (Heat Pump)	7.4
Watts (Cool)	815
Watts (Heat)	1,290
Watts (Heat Pump)	780
Length of Power Cord (Min./Max.)	6' / 6.5'
Plug Type (NEMA)	LC1I (5-15P)
Features	
Electronic Controls	Ready-Select® Controls
Fan Speeds (Cool/Fan/Heat)	3 / 3 / 1
Low Voltage Start-Up	Yes
Auto Cool Function	Yes
Energy Save	Yes
Sleep Mode	Yes
Filter Check	Yes
24-Hour On/Off Timer	Yes
Clean Air Ionizer	
Remote Control	Full-Function with Heat
Air CFM (High/Med/Low)	278 / 252 / 216
Air Direction Control	8-Way
Fresh Air/Exhaust Vent/Closed	No/No/Yes
Filter Type	Antibacterial Mesh
Filter Access	Tilt-Out
Slide-Out Chassis	Yes
Window Mounting Kit (Included)	Pleated Quick Mount
Warranty¹	Yes
Certifications	
Performance	AHAM
Specifications	
Refrigerant	R410a
Shipping Weight (Approx.)	89 Lbs.

¹Warranty 5 year sealed system/1 year full parts and labor.



Plug Type (NEMA)
5-15P

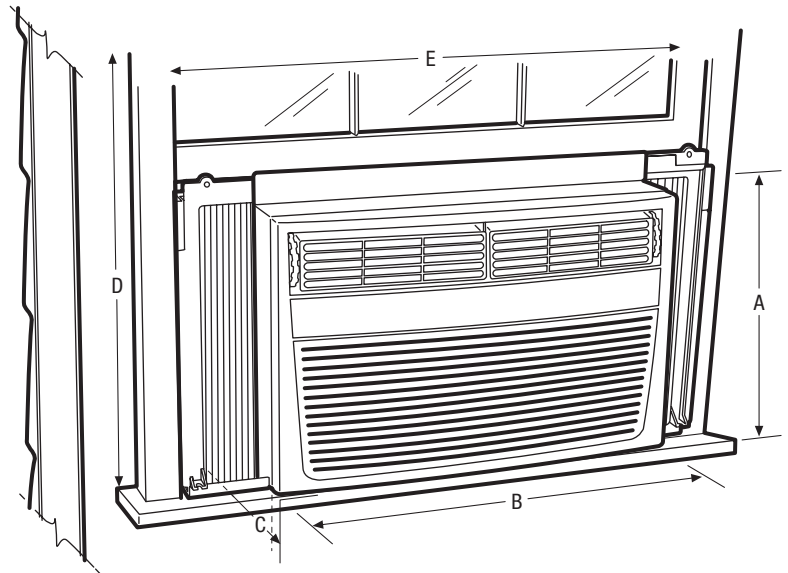

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions		Window Dimensions	
A - Height	15-3/8"	D - Height (Min.)	16-1/2"
B - Width	22-5/8"	E - Width (Min./Max.)	26-7/8" / 36"
C - Depth	23-5/16"	Wall Cutout Dimensions	
		Height	16-1/8"
		Width	23-3/16"
		Max. Wall Thickness	6-1/8"

Accessories information available on the web at frigidaire.com

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FRA08PZU1 02/13

© 2013 Electrolux Home Products, Inc.

Specifications subject to change.