

ASSEMBLY INSTRUCTIONS COASTER FINE FURNITURE



Fine Furniture for every stage of life

193675 Sideboard

REVISION 0: 01/10/2025

PAGE 1 OF 5

COASTERFURNITURE.COM

ASSEMBLY INSTRUCTIONS



ASSEMBLY TIPS:

- 1. Remove hardware from box and sort by size.
- 2. Please check to see that all hardware and parts are present prior to start of assembly.
- 3. Please follow attached instructions in the same sequence as numbered to assure fast & easy assembly.



WARNING!

- 1. Don't attempt to repair or modify parts that are broken or defective. Please contact the store immediately.
- 2. This product is for home use only and not intended for commercial establishments.




ASSEMBLY TIME

15 MINUTES

PARTS IDENTIFICATION

A SIDEBOARD



1PC

B LEG



4PCS

X KNOB WITH SCREW



4SETS

HARDWARE IDENTIFICATION

1 ALLEN WRENCH (M4 x 100mm - BLK)



1PC

2 BOLT (M6 x 50mm - RBW)



8PCS

3 LOCK WASHER (M6 - RBW)



8PCS

4 FLAT WASHER (M6 - RBW)




8PCS

NOTE:

Phillips head screw driver is required in the assembly process; however, manufacturer does not provide this item.




ASSEMBLY INSTRUCTIONS STEP 1

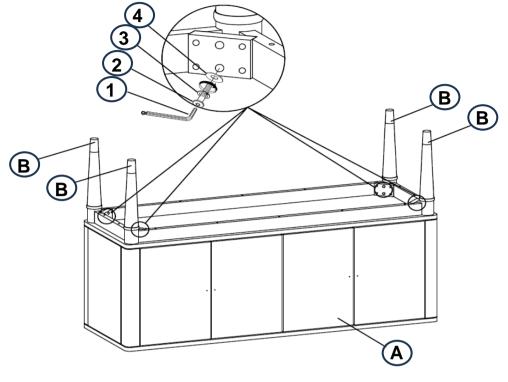

*Bottom View

STEP 2

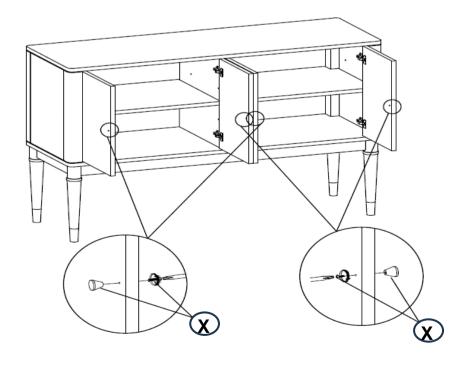


COASTERFURNITURE.COM




ASSEMBLY INSTRUCTIONS STEP 3

OPTIONAL ADJUSTABLE SHELF

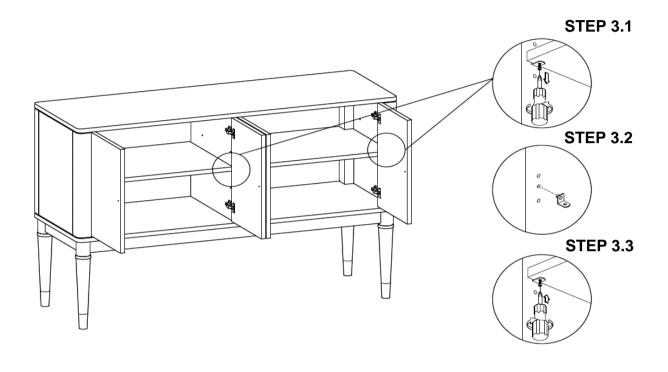

STEP 4 COMPLETE

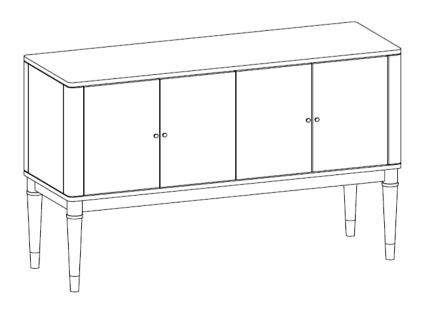

COASTERFURNITURE.COM

PAGE 4 OF 5



ANTI-TIPPING INSTALLATION INSTRUCTIONS FURNITURE TIPPING RESTRAINT

WARNING

Injury may result from tipping furniture.

This restraint may protect against tipping furniture.

Do not allow children to climb on furniture.


This restraint is not a substitute for proper adult supervision.

Failure to detach this restraint before moving the furniture may result in injury and damage.

This restraint must be screwed to a wood stud on the wall, using the long screw provided.


STEP 1

Secure the bracket to the back top of the unit, using the short screw provided, as shown in the drawing.




STEP 2

Locate the wood stud on the wall and secure the other bracket 2 inches below the back of the unit, using the long screw.

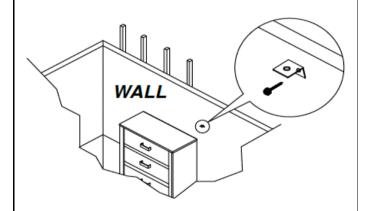


STEP 3

Place the furniture into position so both mounting brackets are vertically in line. Lace the threaded end of the restraint strap through the hole in each mounting bracket. Bring both ends together and rotate the thumb nut onto the threaded end until tight. Ensure that the restraint strap is securely laced and locked.

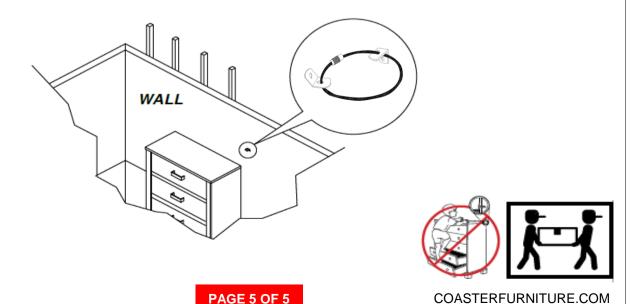



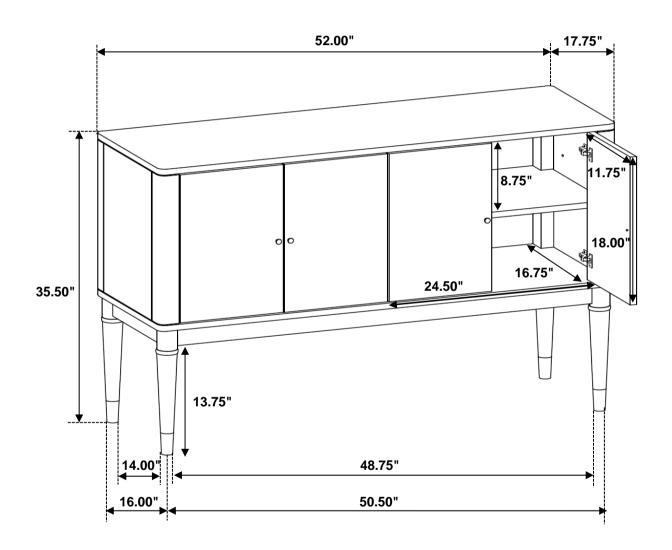

Note: Dimension tolerance ±5%