

30" WARMING DRAWER

MATTEO 700 SERIES



DESCRIPTION

The Matteo 700 series 30" warming drawer, featuring our exclusive matte black finish, redefines versatility in the kitchen. With its innovative true convection design, this drawer does more than just keep food warm—it also excels at slow cooking, proofing, dehydrating, and defrosting, all within a compact, fully enclosed space. The convection fan ensures even heat distribution from top to bottom, making it the perfect solution for keeping side dishes, pies, or bread at just the right temperature. Stylish, functional, and practical, the 700 series warming drawers are indispensable additions to any modern kitchen.

FEATURES

Knob Control
Heavy Duty full extension rails
Large capacity 1.9 cu. ft. (53.3 L)
True convection heating system
Even heat distribution
All stainless steel structure
Warming Temperature range: min. 90 °F up to 195 °F (min. 30 °C up to 90 °C)
Push latch system to open and close the drawer
2 Internal lights

FUNCTIONS

Pre-heat dishes
Pre-heat coffee cups
Keep warm ready food
Defrosting
Leavening dough
Slow cooking min. 90 °F up to 195 °F (min. 30 °C up to 90 °C)

MODEL CODE

F7MWD30MB1

- 

Keep Warm
- 

Defrost
- 

Proofing
- 

Push Opening
- 



Slow Cooking
- 

Sliding Telescopic Rails
- 

Americans with Disabilities Act †

30" WARMING DRAWER

MATTEO 700 SERIES

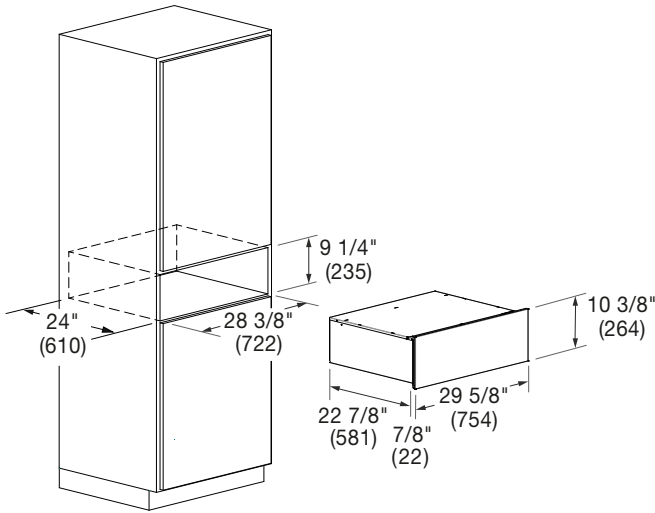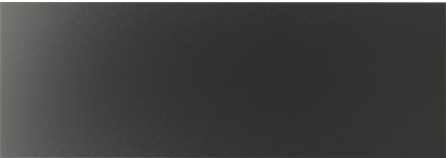

MODEL CODE	30" WARMING DRAWER F7MWD30MB1	
GENERAL DETAILS		
Finish	Matte Black	
Control Type	Electronic Knob	
Compatible Ovens	F7MSPD30MB1 - F7MSCO30MB1 - F7MSP30MB1	
Temperature (max), °F (°C)	195	(90)
Thermostat, °F (°C)	90 - 195	(30 - 90)
Interior Lights	2 x 20 W Halogen	
CAPACITY		
Volume (each), cu. ft. (L)	1.9	(53.3)
Useable Width, in. (mm)	24-3/8	(620)
Useable Height, in. (mm)	7-7/8	(200)
Useable Depth, in. (mm)	16-7/8	(430)
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	29-5/8	(754)
Product Height, in. (mm)	10-3/8	(264)
Product Depth, in. (mm)	22-7/8	(581)
Door Depth with Overlay	1	(23)
Cutout Width, in. (mm)	28-3/8	(722)
Cutout Height (min), in. (mm)	9 1/4	(235)
Cutout Depth (min), in. (mm)	24	(610)
Net Weight, lbs. (kg)	67.2	(30.5)
POWER / RATINGS		
Max power absorbed (W)	1100 W	
Power V (Hz)	120	(60)
Power Cable	NEMA 5-15P	
Power Cable Lenght, in. (mm)	86 5/8	(2200)
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.