

Built-In 18" Freezer with Internal Ice Maker

F 1413 SF









Features:


- MasterCool controls
- ClearView lighting system
- Drop and Lock Shelves
- SmartFresh storage drawers
- FullView storage drawers
- Ice maker
- RemoteVision capable
- Acoustic door and temperature alarm
- Optical door and temperature alarm
- Energy Star

SPECIFICATIONS	
F 1413 SF - Item 37141311USA - Left Hinged	
Overall Unit Width - Excluding Fascia Dimension	17 ³ / ₄ " (451 mm)
Overall Unit Height - Excluding Fascia Dimension	83 ¹ / ₂ " - 85 ³ / ₁₆ " (2121 mm - 2165 mm)
Overall Unit Depth - Excluding Fascia Dimension	24" (610 mm)
Overall Fascia Dimensions	18½" (470 mm) W x 84" - 85½% (2134 mm - 2176.5 mm) H x ¾" (19 mm) D
Niche	
Minimum Cabinet Opening Width	18" (457 mm)
Minimum Cabinet Opening Height	83 ⁵ / ₈ " (2124 mm)
Minimum Cabinet Opening Depth	24" (610 mm)
Plumbing	
Water Supply Requirements	Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 25 psi (1.7 bar) and may not exceed 80 psi (5.5 bar). If the pressure is higher than 80 psi (5.5 bar), a pressure reducing valve must be installed.
Water Connection Line	Standard 1/4" O.D flexible water line needed. The maximum outer diameter of the water pipe (without fittings): 3/8" (10 mm). (water line is not included).
Electrical	
Electrical Requirements - Volts/Amps	110V / 120V, 60Hz, 15 Amps In the case of side-by-side installations, a separate outlet must be used for each appliance.
Power Cord - Plug and length	Yes - NEMA 5-15 plug, 5 ft (1.52 m)
Shipping	
Shipping Weight	354 lbs (160.5 kg)
Shipping Dimensions	21 ¹ / ₄ " W x 89 ³ / ₄ " H x 29 ¹ / ₈ " D
Support	
Call Miele	800.843.7231
Miele Website	⁴www.mieleusa.com
20/20 Link	⁴2020technologies.com

insure proper fit and finish


· For Proud Installation - please adjust accordingly



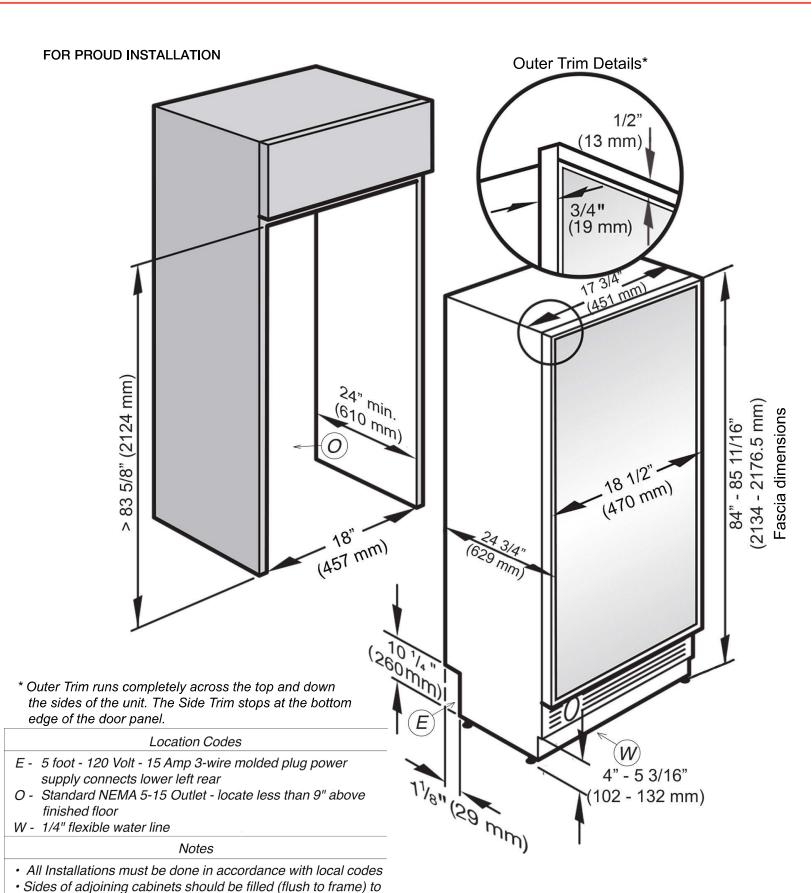




POWER SUPPLY AND WATER CONNECTION BACK VIEW

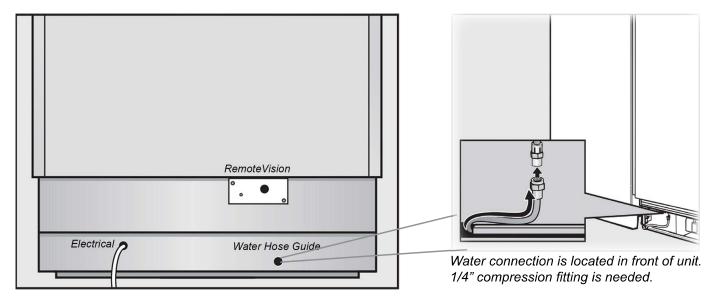

Electrical - 5 foot (1.52 m) - 120 Volt - 15 Amp - NEMA 5-15 molded plug Water line - 1/4" flexible water line - not included


DOOR PANEL DIMENSIONS WITHOUT OUTER TRIM

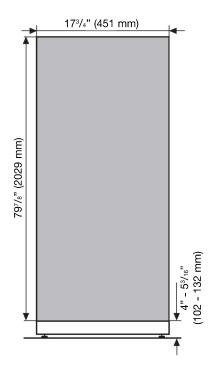



HINGING DETAILS

115° Door

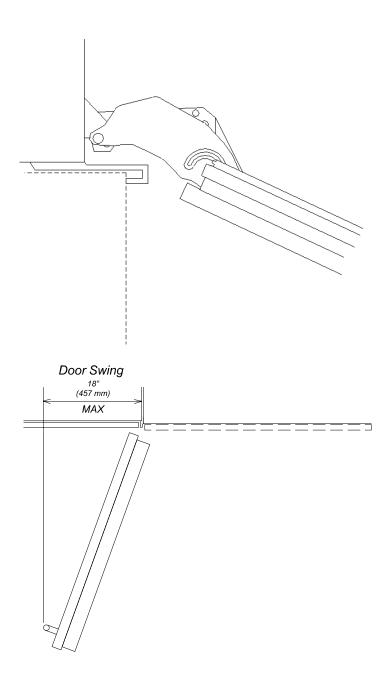

NOTE: Additional space needed depending on the thickness of front panels and handle used.

Freezer units cannot be stop pinned at 90°