
LG REFRIGERATION

LROFC1104V

Counter Depth Column Freezer, 11.4 cu.ft.

11.4 cu.ft. Capacity **Smart Inverter Compressor Multi-Air Flow** No Frost Cooling System SmartPull™ Handle **Reversible Door** Smart Diagnosis™ ENERGY STAR® Quali ied



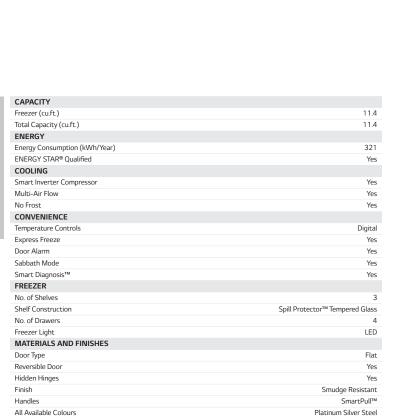





DIMENSIONS/CLEARANCES/WEIGHTS	
Depth with Handles	27 7/8"
Depth without Handles	26 1/4"
Depth without Door	23 5/8"
Depth (Total with Door Open)	48 1/4"
Height to Top of Case	73 1/4"
Height to Top of Door Hinge	73 1/4"
Width	23 7/16"
Installation Clearance	Back 2", Front 24 5/8"
Weight (Unit/Carton)	163 lbs / 181 lbs
Carton Dimensions (WxHxD)	25 15/16" x 76 1/16" x 30 3/16"
LIMITED WARRANTY	
Parts & Labour	1 Year
Sealed System	7 Years
Inverter Linear Compressor	10 Years
UPC CODES	
LROFC1104V (Platinum Silver Steel)	195174010440



*Refrigerator includes brackets that can be used to secure

multiple units together

Customizable Configuration

Installing the products as pairs

(Contact a LG Electronics service center, After initial product installation, all services requested by the customer will be charged.)

Installation components

Before installing the freezer and refrigerator in pairs, prepare the following components. The number of screws may vary according to the model.







2. Bracket frame B (1EA)
















7. Cap Door (2EA)

How to install the product as part of a pair

- Install the freezer and refrigerator side by side by referring to the basic installation sequence and reference dimensions below.
 [Basic installation order]
 - When installing 2 units: Freezer-Refrigerator [Reference dimension]




	Dimension (mm)
Α	minimum 50
В	16.5
С	11
D	110°
Е	1643


 If the appliance seems unsteady, or the doors do not close easily, adjust the appliance's tilt using the instructions below.
Turn the leveling leg clockwise to raise that side of the appliance or counterclockwise to lower it.




- **3.** If the door of the appliance is not level, adjust the difference in the height of the appliance door.
 - Open the door and use the spanner (1) to loosen the keeper nut by turning it to the left.
 - Use the spanner (2) to adjust the height by turning the adjustment hinge pin to the left or to the right

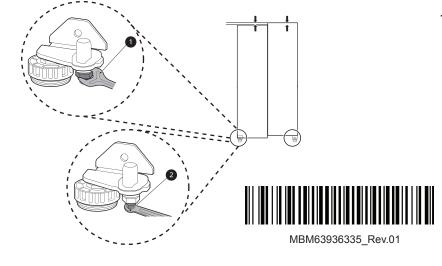


4. Remove the No. (4) screw from the radiation grill in the back of the product. Align the No. (1) bracket frame in the hole in the product and reassemble it using the No. (4) screw.



5. Align the No. (6) bracket frame with the hole in the top of the product and assemble it using the No. (5) screw.



6. Remove the No. (5) screw from the bottom of the front of the product. Align the No. (2) bracket frame with the hole in the product and reassemble it using the No. (5) screw.



7. Insert the No. (4) deco cover between the tops of the products. Next, insert the No. (5) deco case between the products (deco cover) slowly, starting from the top, until it is fully fitted.

