

Refrigeration Equipment Bar Equipment 2-door Refrigerator, 60" (R290) stainless steel door

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738306 (KCHBB60SS)

2-door back bar refrigerator
with stainless steel solid door,
60", R290 refrigerant
gas, +33/+41°C

Short Form Specification

Item No. _____

Back bar refrigerator. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel and doors in 430 stainless steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control.

Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


Construction

- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Optional Accessories

- two shelves for 60" back bar (one right and one left shelves) PNC 880609 ☐
- shelf clips PNC 880611 ☐

APPROVAL: _____

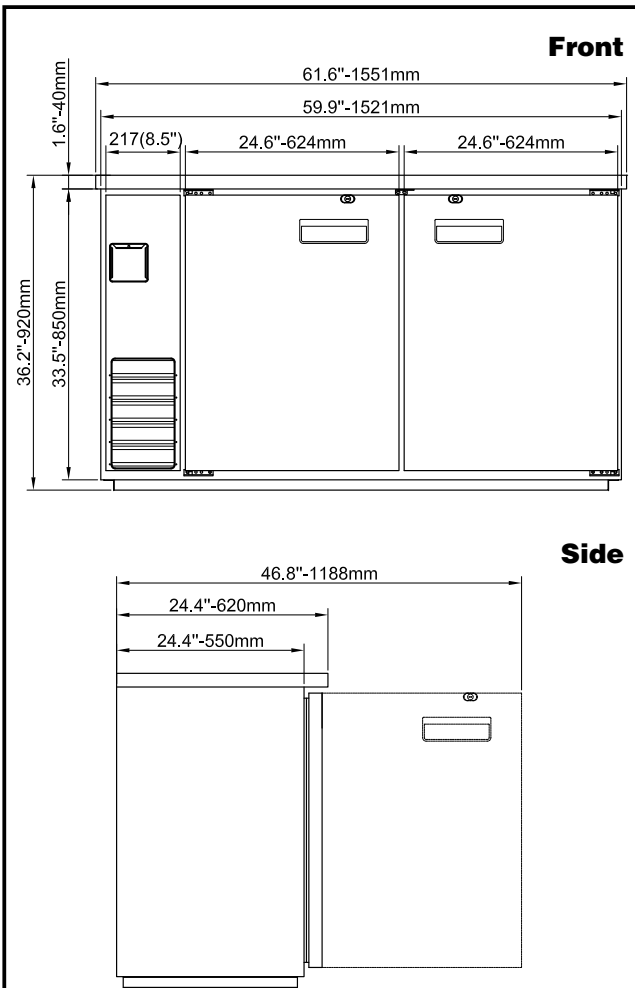

El = Electrical connection

Electric

Supply voltage:

738306 (KCHBB60SS) 115 V/1 ph/60 Hz

Electrical power, max:

0.3 kW

Current consumption:

3 Amps

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity: 16.6 cu.feet

Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Width:	61 1/16" (1551 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 3/16" (919.48 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	18 1/2"
Internal Dimensions (height):	28 15/16"
Internal Dimensions (width):	48 3/16"
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	320 lbs (145 kg)
Shipping volume:	40.11 ft ³ (1.14 m ³)
Number and type of grids (included):	4 - Vinyl-Coated Steel
Type of external material:	Stainless Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5
Refrigerant type:	R290
Refrigerant weight:	110 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube