



**738248 (KCHGM26R)**

1-Hinged Glass Door Full Height Merchandiser Refrigerator 28.5" Long

## Description

1-glass door refrigerator with exterior back panel, bottom panel, and top panel in galvanized steel, exterior side panels in painted steel; interior back, side, and top panels in painted aluminum, and internal bottom panel in 304 stainless steel. Durable and easy to clean for daily commercial use. Control with cabinet temperature display. Self-closing door feature lock and key. Electronic control.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

## Main Features

- External temperature display.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Adjustable shelves for flexible storage
- Decorative illuminated header, customizable for enhanced branding capability
- On/off switch controls interior LED lights
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Removable rubber bumper guards for airflow spacing and shock absorption

## Construction

- Painted black steel exterior, for durable and sleek modern finish
- Crystal-clear glass door delivers superior product visibility
- White aluminum interior, bright and clean polished look for elevated presentation
- Self closing doors.
- Lockable door.
- Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Front and rear ventilation panel design improves airflow for effective heat release from the refrigeration system.

## Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.
- 60 mm insulation for energy saving.

## Optional Accessories

PNC Code	Description
<b>Containers, Trays and Grids</b>	
880593	Shelf (Gray) for 26 Cu. Ft. Merchandiser (Glass Door)
880611	Shelf clips (4-pack)
880711	Shelf Label Support (Gray) for 26 Cu. Ft. Merchandiser (Glass Door) (570mm)
880733	Shelf (White) for 26 Cu. Ft. Merchandiser (Glass Door)
880736	Shelf Label Support (White) for 26 Cu. Ft. Merchandiser (Glass Door) (570mm)

# Technical specifications

## Electric

<b>Supply voltage:</b>	115 V/1 ph/60 Hz
<b>Electrical power max:</b>	0.31 kW
<b>Plug type:</b>	USA NEMA 5-15P
<b>Current consumption:</b>	3 Amps
<b>Compressor power:</b>	1/5 hp
<b>Power Cable Length:</b>	2500 mm

## Capacity:

<b>Gross capacity:</b>	25.9998 cu.feet
------------------------	-----------------

## Key Information:

<b>Number and type of grids (included):</b>	4 (588x664)
<b>Door hinges:</b>	Right Side
<b>External dimensions, Width:</b>	28 3/8" (720 mm)
<b>External dimensions, Depth:</b>	33 11/16" (856 mm)
<b>External dimensions, height:</b>	83 11/16" (2126 mm)
<b>Number and type of doors:</b>	1 Glass
<b>Internal Dimensions (depth):</b>	29 3/8" (746.76 mm)
<b>Internal Dimensions (height):</b>	52 3/8" (1330.96 mm)
<b>Internal Dimensions (width):</b>	23 13/16" (604.52 mm)
<b>Net weight:</b>	348 lbs (158 kg)
<b>Shipping width:</b>	29 15/16" (760 mm)
<b>Shipping depth:</b>	36 5/8" (931 mm)
<b>Shipping height:</b>	85 13/16" (2180 mm)
<b>Shipping weight:</b>	377 lbs (171 kg)
<b>Shipping volume:</b>	54.47 ft <sup>3</sup> (1.54 m <sup>3</sup> )
<b>Type of external material:</b>	Black Prepainted Steel
<b>Type of internal material:</b>	White Prepainted Aluminium
<b>Approvals</b>	ETL C&US;ETL SANITATION


## Refrigeration Data

<b>Operating temperature min.:</b>	32 °F (0 °C)
<b>Operating temperature max.:</b>	41 °F (5 °C)
<b>Defrost type:</b>	Auto Defrost
<b>Evaporator type</b>	Finned
<b>Refrigerant unit side:</b>	Bottom


## Sustainability

<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	85 g


Front

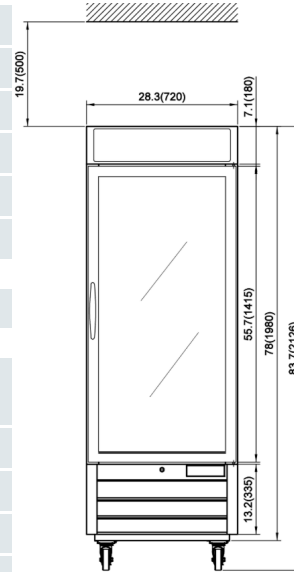

Side

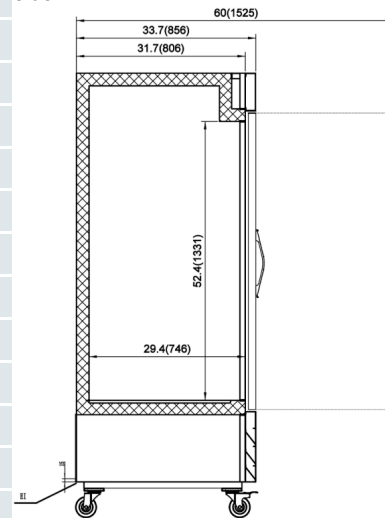

Top

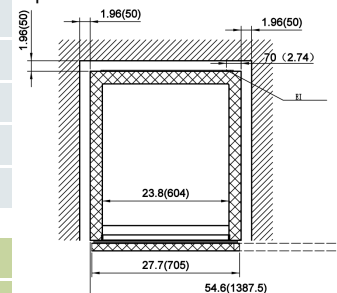

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

