

PCHBL630SS

30" WALL-MOUNT HOOD

YALE
APPLIANCE



FEATURES & BENEFITS



Stainless steel baffle slot filters - With a baffle shape and a mesh backing, it allows airflow while preventing grease from passing through. Grease is collected in the baffle cavities with high capacity.



LED lighting - High Quality LED with 20,000 hours of lifespan allows a significant energy saving.



Air flow control - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



GENERAL FEATURES

Standard Operating Mode	Ducted
Recirculating	Yes, Optional, *Accessories needed
Maximum CFM (Blower)	600 CFM
CFM Reduction Kit	Built in (Programmable)
Sones	0.4 - 5.2 Sones
Number of Speed Settings	4 Speeds
Motor Location	Integrated Motor in Hood Body
Number of Lights	2 LED Lights
Light Lumens	235 Lumens
Light Color	3000 Kelvin
Total Power of the Lamps	2.1 Watts
Damper Included	Yes
Grease Filter Material	Stainless Steel
Grease Filter Type	(2) Stainless Steel Baffle Slot Filters

TECHNICAL DETAILS

Watts	265W
Current	15 or 20 A
Volts	120V
Frequency	60HZ
Plug Type	Junction Box

WEIGHTS & DIMENSIONS

Overall Dimensions (HxWxD)	30"W x 19 11/16"D x 10 1/4"H
Minimum Mounting Height Above Gas / Electric Cooking Surface	30" Gas 24" Electric
Diameter of Air Duct Top	6" Round
Diameter of Air Duct Rear	NA

OPTIONAL ACCESSORIES

Long Chimney Ext.	#ACC02762 - Reaches 8'5" - 11'3" (ducted), 8'6" - 11'7" (recirculating)
-------------------	---

RECIRCULATING ACCESSORIES REQUIRED

Recirculating Kit	#ACC02766 (contains 6" deflector and 2 round carbon filters)
-------------------	--

WARRANTY

Limited Warranty Parts & Labor	5 Years
--------------------------------	---------




PCHBL630SS


30" WALL-MOUNT HOOD

HOOD DIMENSIONS


TOP VIEW

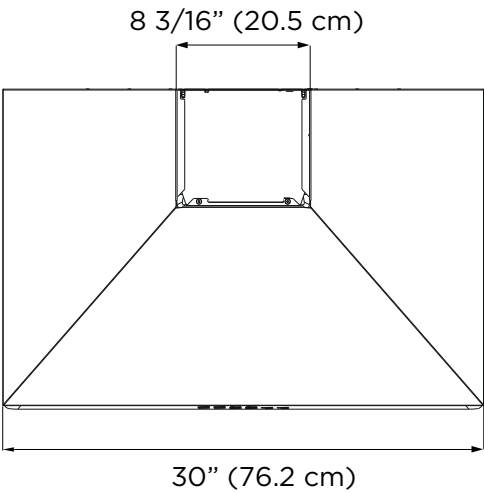

SIDE VIEW

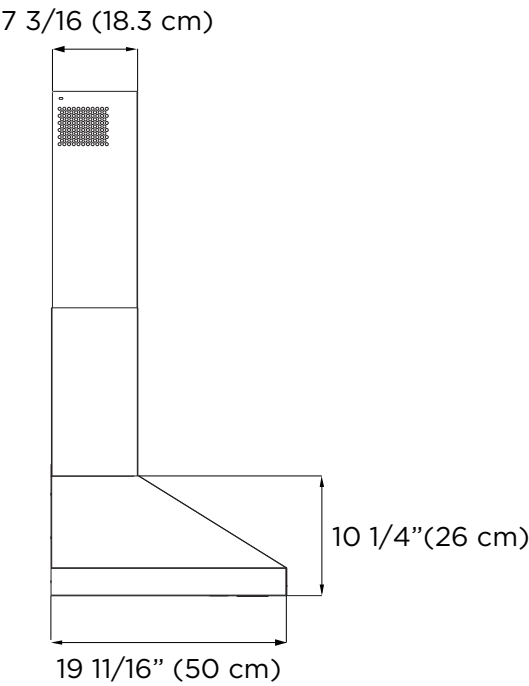

FRONT VIEW

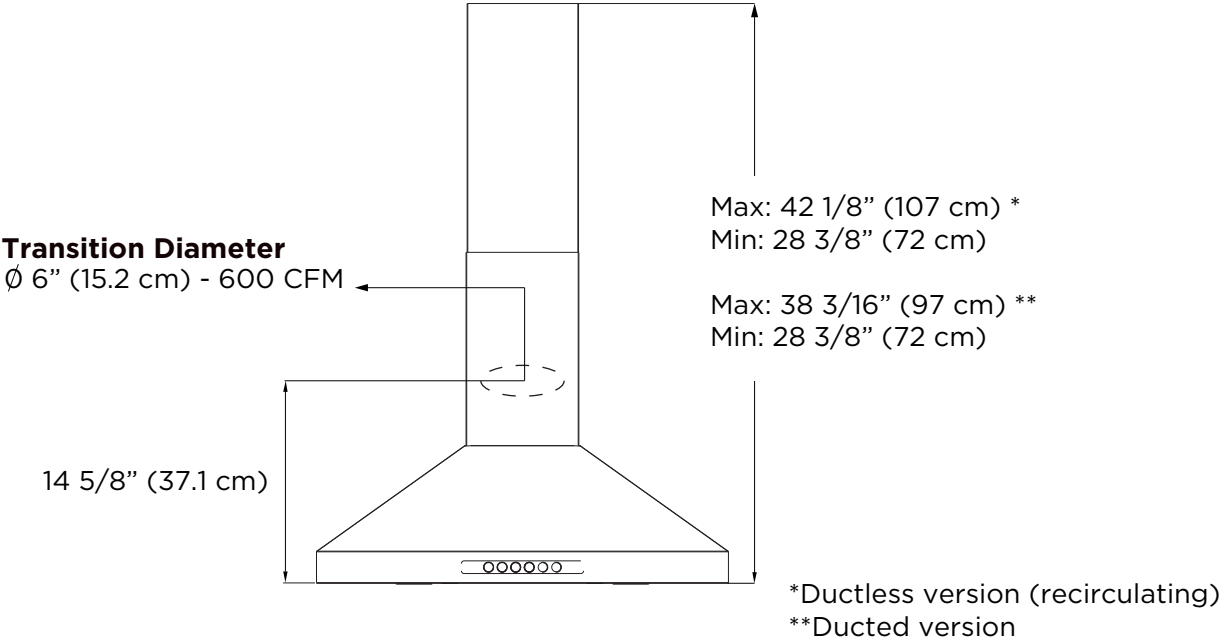

Specifications are for planning purposes only. Refer to installation instructions and consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product. Specifications are correct at time of printing. Yale Appliance reserves the right to change product specifications or design without notice.