

# DLE7400\_E / DLG7401\_E

## 7.3 cu.ft. Rear Control Dryer with EasyLoad™ Door

7.3 cu. ft. Ultra Large Capacity

EasyLoad™ Door

ThinQ® Technology with Proactive Customer Care

Sensor Dry

FlowSense™ Duct Clogging &amp; Lint Filter Indicators

ENERGY STAR® Certified

Aluminized Alloy Steel Drum

LoDecibel™ Quiet Operation

SmartDiagnosis™

Reversible Door

Wrinkle Care Option

## AVAILABLE COLORS



WHITE



GRAPHITE STEEL



### Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- Proactive Customer Care offers preventative maintenance tips



SUMMARY		FABRIC CARE FEATURES		POWER SOURCE	
Type	Rear Control Top Load Dryer	Sensor Dry	Yes	Ratings	CSA Listed
Capacity	7.3 cu. ft.	Precise Temperature Control with Variable Heater	Yes	Electrical Requirements / Type	<b>Electric:</b> 240V 30 Amps <b>Gas:</b> 120V, 15 Amps
Matching Washer	WT7405C_ / WT7400C_	CONVENIENCE FEATURES		BTU Rating	Gas: 20,000
Sensor Dry	Yes	3 Minute Installation Check	Yes	OPTIONS	
Color	White (W) / Graphite Steel (V)	LoDecibel™ Quiet Operation	Yes	LP Conversion Kit	383EEL3002D / LPK1
APPEARANCE		End of Cycle Signal	Yes	Side Venting Kit	383EEL9001B
EasyLoad™ Door	Yes	Drum Light	Yes	DIMENSIONS	
Intelligent Electronic Controls with LED Display	Yes	Reversible Door	Yes	Product (WxHxD)	27" x 44 1/4" x 29 1/2" (50 1/4" D with door open)
Dial-A-Cycle™	Yes	FlowSense™ Duct Clogging Indicator	Yes	Carton (WxHxD)	29 1/2" x 47 1/8" x 30 7/8"
ENERGY		Wrinkle Care Option	Yes	Weight (Product)	<b>Electric:</b> 129.8lbs. <b>Gas:</b> 132.5lbs.
ENERGY STAR® Qualified	Yes	Child Lock	Yes	Weight (Carton)	<b>Electric:</b> 149.6lbs. <b>Gas:</b> 152.3lbs.
DRYER PROGRAMS		Venting Option	<b>Electric:</b> 4 Way Venting <b>Gas:</b> 3 Way Venting	LIMITED WARRANTY	
No. of Programs	8	4 Adjustable Legs	Yes	Parts & Labor	1 Year
	Normal, Heavy Duty, Bedding, Delicates, Perm Press, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded (Manual Dry)	Remaining Time Display/Status Indicator(s)	Yes	UPC CODES	
DRYER OPTIONS		SMART FEATURES		DLE7400WE (Electric / White)	195174026649
No. of Options	12	LG ThinQ® Technology	Yes	DLG7401WE (Gas / White)	195174026656
	Wrinkle Care, Custom Program, PGM Save, Child Lock, More Time, Less Time, Signal, Damp Dry Signal, Energy Saver, Default On/Off, Wi-Fi Connect, Remote Start	Proactive Customer Care (PCC)	Yes	DLE7400VE (Electric / Graphite Steel)	195174026687
DRYER DETAILS		SmartDiagnosis™	Yes	DLG7401VE (Gas / Graphite Steel)	195174026694
Temperature Settings	High, Med.High, Medium, Low, Ultra Low	WiFi Connectivity	Yes		
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	Remote start and cycle monitor	Yes		
Manual Dry Times	60, 50, 40, 30, 20 min, More-Less	Energy Monitoring	Yes		
		MATERIALS AND FINISHES			
		Aluminized Alloy Steel Drum	Yes		
		Tub Rear	Painted		
		Cabinet	Painted Steel		
		Door / Trim	Solid / Silver painted		

# DLE7400\_E / DLG7401\_E

## 7.3 cu.ft.Rear Control Top Load Dryer


### QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

#### DIMENSIONS/CLEARANCES/WEIGHTS

A Width	27"
B Height	44 1/4"
C Depth	29 1/2"
D Depth with Door Open (in)	50 1/4"
Carton Dimensions (WxHxD)	29 1/2" x 47 1/8" x 30 7/8"
<b>ENERGY / RATINGS</b>	
ENERGY STAR® Qualified	Yes
Ratings	CSA Listed
Electrical Requirements / Type	Electric: 240V 30 Amps Gas: 120V, 15 Amps
BTU	20,000 Feet


#### DIMENSIONS AND CLEARANCES

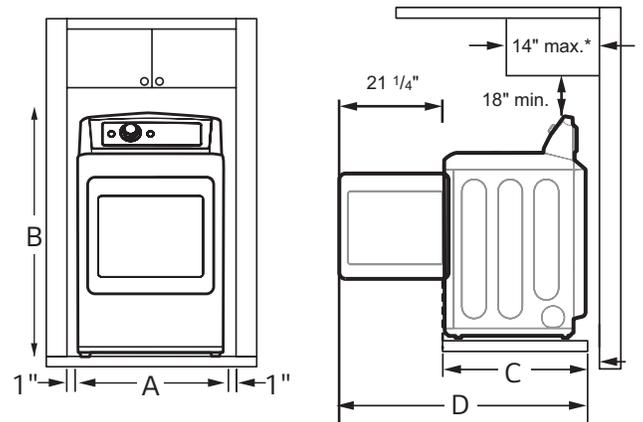

- Install the washing machine on a solid floor that is strong and rigid enough to support the weight of the washing machine, even when fully loaded, without flexing or bouncing. If the floor has too much flex, you may need to reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.

#### CONNECTING THE GAS SUPPLY



- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Use only a new stainless steel flexible connector and a new AGA-certified connector.
- A gas shutoff valve must be installed within 6 ft. (1.8 m) of the dryer.
- The dryer is configured for natural gas when shipped from the factory. Make sure that the dryer is equipped with the correct burner nozzle for the type of gas being used (natural gas or propane gas).
- If necessary, the correct nozzle (for the LP nozzle kit, order part number 383EEL3002D) should be installed by a qualified technician and the change should be noted on the dryer.
- All connections must be in accordance with local codes and regulations. Gas dryers MUST exhaust to the outdoors.

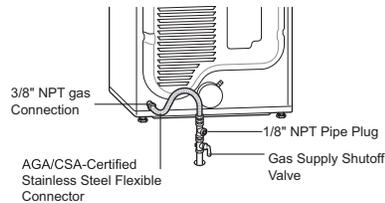

#### VENTING / DUCTWORK

**NOTE:** Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.



#### CONNECTING ELECTRIC DRYERS

- A **4-wire connection** is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996**.
- A **3-wire connection is NOT permitted** on new construction **after January 1, 1996**.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.



- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).
- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct	
 Recommended	0	65 ft.(19.8 m)	
	1	55 ft.(16.8 m)	
	2	47 ft.(14.3 m)	
	3	36 ft.(11.0 m)	
 a: 4" (10.2 cm)	4	28 ft.(8.5 m)	
	 Use only for short run installations b: 2.5" (6.35 cm)	0	55 ft.(16.8 m)
		1	47 ft.(14.3 m)
		2	41 ft.(12.5 m)
3		30 ft.(9.1 m)	
	4	22 ft.(6.7 m)	