
## SUMMIT

# FFRF36IF

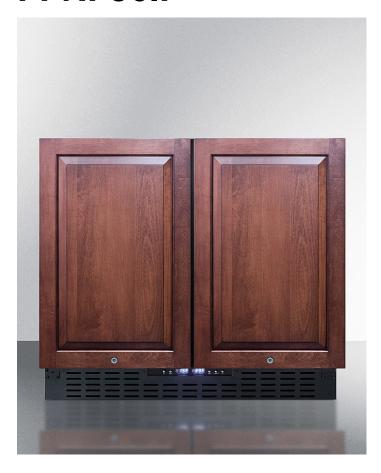

34.25" x 35.5" x 24.25" (H x W x D)

Commercially approved, frost-free, side-by-side refrigerator-freezer for built-in or freestanding use with two panel-ready doors, black cabinet, front-placed digital controls

#### **Highlights:**

Commercially listed to NSF-7 standards and meets UL-471 for use in foodservice applications

Unique space & energy-saving design features a full refrigerator and freezer compartment with single compressor operation

Versatile, all-in-one design allows for residential use

#### **Product Features:**

Commercially approved	ETL-S listed to NSF-7 standard and meets UL-471 for use in commercial settings  Front-breathing system allows the unit to be used built-in	
Built-in capable		
All-in-one design	Separate refrigerator and freezer sections with single compressor operation	
Panel-ready doors	Integrated stainless steel door frame accepts full overlay panels, allowing you to customize the refrigerator door or blend it into your cabinetry design; panel size: 17 9/16" W x 27 7/8" H and at least 3/4" thick; 10 lbs. maximum; customers provide their own handles	
Frost-free operation	No-frost operation ensures reduced maintenance in both the refrigerator and freezer compartments	
Digital thermostat	Digital control panel allows for easy temperature control, with a clear readout in Fahrenheit or Celsius	
LED lighting	Interior LED lighting in both sections offers an attractive and energy efficient presentation	
Adjustable shelves (5 placement options)	Refrigerator section includes three spill-proof glass shelves for easier cleaning, while the freezer includes three adjustable chrome shelves to ensure proper cold air circulation	
Convertible freezer	Freezer compartment temperature can be set to serve as a second refrigerator as needed	







### FFRF36IF Specifications:

Overview		
Height of Cabinet	34.25" (87 cm)	
Width	35.5" (90 cm)	
Depth	24.25" (62 cm)	
Depth with door at 90°	42.0" (107 cm)	
Capacity	5.8 cu.ft. (164 L)	
Defrost Type	Frost-Free	
Door	Stainless Steel	
Cabinet	Black	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Sanitation	ETL-S	
Energy Usage/Year	504.0kWh/year	
Amps	1.3	
Voltage/Frequency	115 V AC/60 Hz	
Weight	158.7 lbs. (72 kg)	
Shipping Weight	163.7 lbs. (74 kg)	
Estimated Time to Ship	2 to 4 days	
Parts & Labor Warranty	1 Year	
Compressor Warranty	5 Years	
Refrigerator-Freezer		
Door Swing	French	
Adjustable Shelves	Yes	
Interior Light	Yes	
Refrigerator - Interior Height	23.5" (60 cm)	
Refrigerator - Interior Width	12.75" (32 cm)	
Refrigerator - Interior Depth	16.75" (43 cm)	
Refrigerator - Capacity	20 4	
	2.9 cu.ft	
Refrigerator - Shelf Type	Z.9 cu.π Glass	
Refrigerator - Shelf Type	Glass	
Refrigerator - Shelf Type Refrigerator - Shelf Qty Refrigerator - Temperature	Glass 3	
Refrigerator - Shelf Type Refrigerator - Shelf Qty Refrigerator - Temperature Range Refrigerator - Refrigerant	Glass 3 36°F to 46°F	
Refrigerator - Shelf Type Refrigerator - Shelf Qty Refrigerator - Temperature Range Refrigerator - Refrigerant Type Refrigerator - Refrigerant	Glass 3 36°F to 46°F R600a	

Freezer - Interior Width	12.75" (32 cm)
Freezer - Interior Depth	16.75" (43 cm)
Freezer - Capacity	2.9 cu.ft
Freezer - Shelf Type	Chrome
Freezer - Shelf Qty	3
Thermostat Type	Digital
Fan Type	Interior and Exterior
Refrigerant Type	R600a
Refrigerant Amount	1.59 oz.
High Side PSI	150.0
Low Side PSI	50.0
Level Legs	2
Freezer - Temperature Range	-22°F to 46°F
Compressor Step Height	4.75" (12 cm)
Compressor Step Width	12.75" (32 cm)
Compressor Step Depth	4.25" (11 cm)

