30" Under-Cabinet Wall Hood

800 Series - Stainless Steel DPH30652UC





DPH30652UC Stainless Steel

Quickly and quietly clears the air of smoke and odors.

Features & Benefits

600 CFM centrifugal integrated blower included.

Allows you to adjust the performance of your hood to match the type of cooking.


Efficiently filters grease and other solid particles out of the extracted air.

Flexible design gives the ability to recirculate the air back into the kitchen.

Professional styling with deep capture area.

General Properties				
Operating mode	Convertible: ducted / recirculating			
Maximum CFM (blower)	600 CFM			
Number of speed settings	2-stage			
Motor location	Integrated motor in hood body			
Number of lights	2			
Bulb type	Incandescent			
Light lumens	380			
Light color	2700 K			
Total power of the lamps	80 W			
Damper included	Yes			
Grease filter material	Aluminum			
Grease filter type	Multilayer cassette			
Technical Details				
Watts	449 W			
Volts	120 V			
Frequency	60 Hz			
Plug type	No plug			

Dimensions & Weight								
Overall appliance dimensions (width of canopy included) (HxWxD)	11" x 30" x 23"							
Minimum distance above cooktop / range cooking surface	Min. 24" Electric / Min. 30" Gas							
Diameter of air duct top	8"							
Diameter of air duct back	8"							
Net weight	34 lbs							
Accessories - Optional								
Replacement charcoal filter	DHZ3052UC							
Recirculation kit	DRZ3052UC*							









Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

30" Under-Cabinet Wall Hood


800 Series - Stainless Steel DPH30652UC




HVI Performance Values

		Pressure (in. H2O)		Power (W)		CFM		Sones	
Exhaust	Duct Size	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed
Vertical	8"	0.1	0.013	445	174	500	170	12.5	2.0
Horizontal	8"	0.1	0.013	449	176	520	180	12.5	2.0

Installation Details

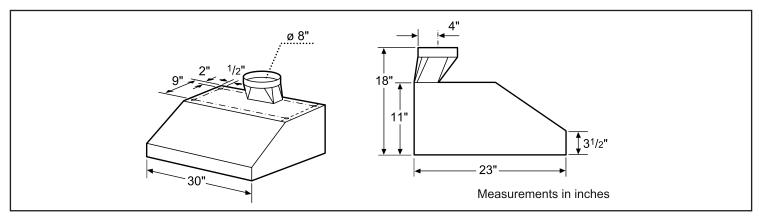

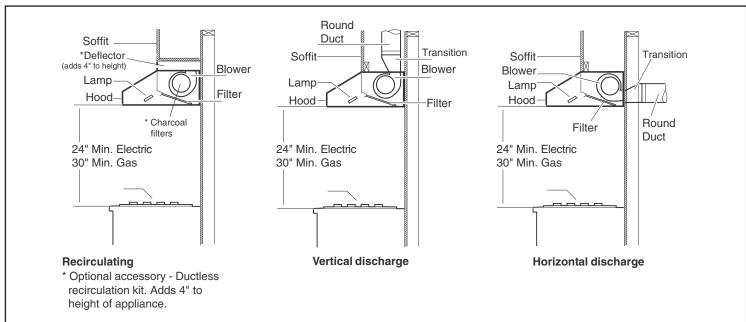

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.