SPRF34D7



34" x 23.63" x 23.75" (H x W x D)

Commercially approved two-drawer refrigerator-freezer for built-in or freestanding use, with digital thermostat, frost-free operation, panel-ready drawer fronts, and complete stainless steel construction

Highlights:

Commercially approved to NSF-7 standards

Flexible design allows built-in or freestanding use in 24" spaces

Unique two-drawer design features separate refrigerator and freezer compartments

Product Features:


24" Wide 2-Drawer Refrigerator-Freezer	Complete refrigeration storage solution with top drawer refrigerator and bottom drawer freezer
Commercially approved	ETL-S listed to NSF-7 Standards for use in commercial establishments
Built-in capable	Make the best use of space by installing this unit under the counter and flush with other cabinetry
Stainless steel construction	Interior and exterior are fully constructed from stainless steel to ensure lasting durability and easy cleanup
Panel-ready drawer fronts	Drawers accept overlay panels (size: 23.43" x 15" at 3/4" thick) to let you seamlessly blend the refrigerator into cabinetry design
Two sliding drawers	Smooth gliding stainless steel drawers for easy use
Frost-free operation	Minimum user maintenance with a fully no-frost operation system
Digital thermostat	Electronic controls located on the top drawer ensure easy temperature management, with an external readout of Celsius or Fahrenheit
LED lighting	Elegant LED lighting in a gentle white hue illuminates the refrigerator section for an easy view of the interior


SUMMIT

SPRF34D7 Specifications:

Overview	
Nominal Height	34.0" (86 cm)
Height of Cabinet	34.0" (86 cm)
Nominal Width	24.0" (61 cm)
Width	23.63" (60 cm)
Nominal Depth	24.0" (61 cm)
Depth	23.75" (60 cm)
Depth with Handle	25.13" (64 cm)
Depth with door at 90°	39.25" (100 cm)
Capacity	3.9 cu.ft. (110 L)
Defrost Type	Frost-Free
Door	Stainless Steel/Panel-Ready
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	380.0kWh/year
Amps	1.0
Voltage/Frequency	115 V AC/60 Hz
Weight	108.0 lbs. (49 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101107400
Refrigerator-Freezer	
Door Swing	Drawer
Interior Light	Yes
Refrigerator - Interior Height	10.0" (25 cm)
Refrigerator - Interior Width	18.75" (48 cm)
Refrigerator - Interior Depth	15.5" (39 cm)
Refrigerator - Temperature Range	36°F to 43°F
Freezer - Interior Height	9.25" (23 cm)
Freezer - Interior Width	18.75" (48 cm)
Freezer - Interior Depth	15.5" (39 cm)
Thermostat Type	Digital
Fan Type	Interior

Refrigerant Type	R600a
Refrigerant Amount	1.13 oz.
High Side PSI	270.0
Low Side PSI	105.0
Freezer - Temperature Range	-11°F to 11°F
Compressor Step Height	3.5" (9 cm)
Compressor Step Width	18.75" (48 cm)
Compressor Step Depth	4.0" (10 cm)
Sabbath Mode	Yes
Sound Level	34.2 dB

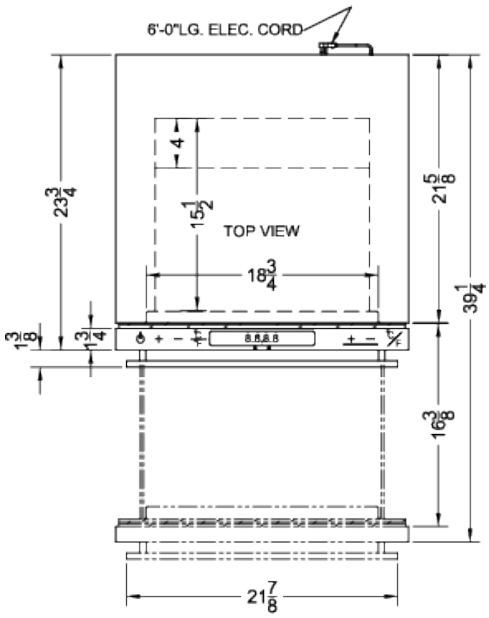

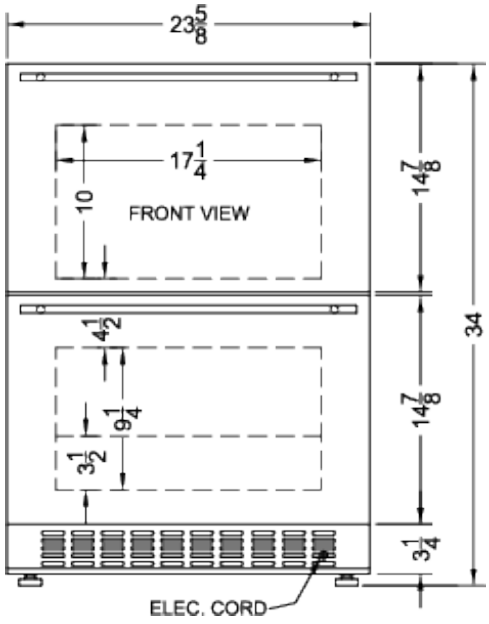

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**