

WD405CS / WD405CB

LG SIGNATURE 1.0 cu. ft. 29" SideKick™ Pedestal Washer

LG SIGNATURE

1.0 cu. ft. Right Size Capacity
Premium Brushed Platinum Steel
SmartDiagnosis™
Electronic Control Panel with Dual LED Display
Compatible with LG Signature Washer (WM9900HSA,
WM9901HBA)

Twin Wash®
Compatible

1.0 cu.ft.
Capacity



PRODUCT FEATURES

SUMMARY

Capacity (cu.ft.) 1.0 cu.ft.

APPEARANCE

Control & Display Electronic Control Panel with LED Display
Touch Buttons Yes

WASH PROGRAM

3 Motion Technology Yes
6
Number of Programs Normal, Intimates,
Hand Wash, Rinse+Spin,
Tub Clean, Downloaded

WASH OPTIONS

Number of Options 5
Warm Water, Rinse, Control Lock, Wi-Fi, Remote Start

WASHER DETAILS

No. of Temps 2
Warm, Cold
Twin Wash*Compatible Yes

CONVENIENCE FEATURES

End of Cycle Signal Yes
Auto Suds Removal Yes
Forced Drain System Yes
Child Lock Yes
Leveling Legs 4 Adjustable Legs
Smart Diagnosis (v3.0) Yes

MOTOR AND AGITATOR

Motor Type Direct Drive Motor
Motor Speed Variable
Max RPM 700

MATERIALS AND FINISHES

NeveRust® Stainless Steel Drum Yes
Cabinet VCM
Control Panel Plastics
Top Plate N/A
Door Rim Glass / Black
Door Cover Transparent Tinted Glass
All Available Colors Brushed Platinum Steel (S)
Brushed Black Steel (B)

POWER SOURCE

Rating UL Listed
Electrical Requirements 120V, 5 Amps
Type Electric

ACCESSORIES

Magnetic Remote Control N/A

DIMENSIONS

Product (WxHxD) 29" x 14 1/8" x 30 7/8"
(52 3/4" with drawer open)
Carton (WxHxD) 31 9/16" x 16 1/2" x 33 27/32"
Weight (Product/Carton) 108 / 118 lbs

LIMITED WARRANTY

Parts and Labor 1 Year
Direct Drive Motor 10 Years
Drum Limited Lifetime

UPC CODE

WD405CS 195174072271
WD405CB 195174119785

WD405CS/ WD405CB
LG SIGNATURE SideKick™ Pedestal Washer

IMPORTANT

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS	
Product (WxHxD)	29" x 14 1/8" x 30 7/8"
Depth with Drawer Open	52 3/4"
Carton Dimensions (in) (WxHxD)	31 9/16" x 16 1/2" x 33 27/32"
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 5 Amps

INSTALLATION

WARNING

- Two or more people are required when moving, unpacking, and stacking the washer. Failure to follow this warning may result in damage to property or serious bodily harm.
- Store and install the washer where it will not be exposed to weather or to temperatures below freezing. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- Properly ground the washer to conform with all electric governing codes and ordinances. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- To reduce the risk of electric shock, do not install the washer in humid spaces. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- To ensure proper air flow, do not block the large opening on the bottom of the washer with carpeting or other materials.
- Do not remove the ground prong. Do not use a 2-prong adapter or 2-wire extension cord. Failure to follow these warnings can cause serious injury, fire, electric shock, or death.

CAUTION

- This pedestal washer must be installed underneath a matching front-loading LG washing machine manufactured after 2009. (The 29" wide machine must be stacked under a 29" wide LG front-loading washer. The 27" wide machine must be stacked under a 27" wide LG front-loading washer.)
- The pedestal washer will not work as a standalone unit.
- The pedestal washer must be stacked under an LG brand appliance in order to operate properly..

Power Outlet


- The power outlet must be within 60 in. (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.

Flooring

- To minimize noise and vibration, the washer MUST be installed on a solidly constructed floor.
- Allowable slope under the entire washer is a maximum 1 inch. difference from side to side or from front to back.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.



PRODUCT DIMENSIONS

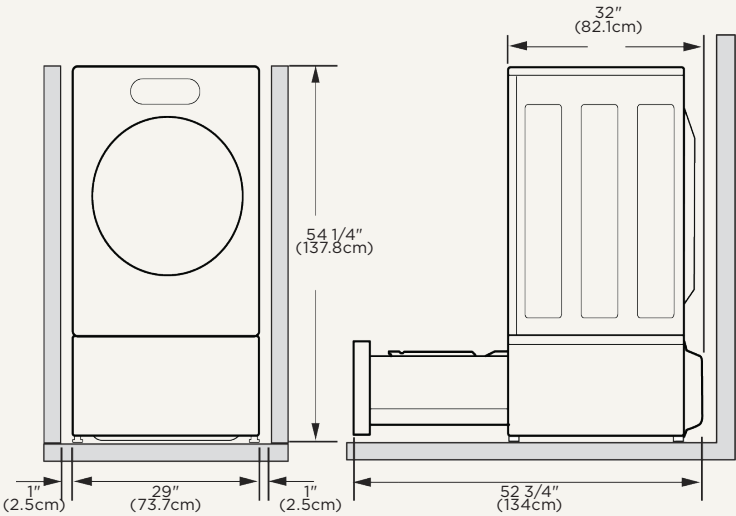


- To ensure sufficient clearance for water lines and airflow, allow minimum clearances of at least 1 in. (2.5 cm) at the sides and 4 in. (10 cm) behind the unit. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

CONNECTING THE DRAIN HOSE


Please read the Owner's Manual installation instructions first after purchasing this product or transporting it to another location.

CONNECTING THE WATER LINES WITH FULL-SIZE APPLIANCES

- Front-loading washer and pedestal washer with dryer.




- Front-loading washer and pedestal washer with Turbo Steam dryer




CONNECTING THE DRAIN HOSE WITH FULL-SIZE WASHER


- Front-loading washer and pedestal washer with dryer.



- Front-loading washer and pedestal washer with hybrid dryer



DETAIL VIEW OF DRAIN CONNECTOR CONNECTION



For narrow standpipes, insert hybrid dryer drain hose in center of drain connector. DO NOT insert dryer drain hose further than 1 inch (2.5 cm). Use tie straps to keep hoses in place.