CIT365TB

36-INCH INDUCTION COOKTOP MASTERPIECE® SERIES, BLACK GLASS, FRAMELESS









FEATURES & BENEFITS

- ★ Large 13" round heating element and the most powerful (5,500 W) in its class
- Industry exclusive triple zone element allows you to match element size to various sized cookware
 - PowerBoost® feature increases element power by up to 50%, saving time to heat up pots or cook large quantities
 - Each element has its own shut-off timer, making it easier to coordinate the cooking of multiple dishes
 - Illuminated touch controls with 17 power settings is highly precise and allows for easy cleaning

ACCESSORIES (OPTIONAL)



CHEFSPAN13 16" Round Skillet



CHEFSPAN08 10" Stainless Steel Pan


GENERAL PROPERTIES	
Controls	Touch Controls
ELEMENT PERFORMANCE	
Power of Front Left Heating Element	1,800 W
Power of Front Left Heating Element (In Boost)	3,100 W
Power of Back Left Heating Element	1,800 W
Power of Back Left Heating Element (In Boost)	3,100 W
Power of Center Heating Element	3,300 / 2,600 / 2,200 W
Power of Center Heating Element (In Boost)	5,500 / 4,400 / 3,700 W
Power of Front Right Heating Element	2,200 W
Power of Front Right Heating Element (In Boost)	3,700 W
Power of Back Right Heating Element	1,400 W
Power of Back Right Heating Element (In Boost)	2,200 W
Burners With Booster	All 5
ELEMENT SIZE	
Dimension of Front Left Heating Element	7"
Dimension of Back Left Heating Element	7"
Dimension of Center Heating Element	13", 11", 9"
Dimension of Back Right Heating Element	6"
Dimension of Front Right Heating Element	9"
TECHNICAL DETAILS	
Watts (W)	11,100 W
Circuit Breaker (A)	50 A
Volts (V)	208 / 240 V
Frequency (Hz)	50 / 60 Hz
Plug Type	No Plug
Conduit	39" Flexible 3-Wire
Energy Source	Electric
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD) (in)	3/8"+3 7/8" × 37" × 21 1/4"
Required Cutout Size (HxWxD) (in)	3 7/8 " × 34 3/4 " × 19 7/8 "
Minimum Distance From Counter Front (in)	2 1/2 "
Minimum Distance From Rear Wall (in)	2 3/8"
Net Weight (lbs)	52 lbs
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year

Page 1 of 2 10 / 17



36-INCH COOKTOP AND CUTOUT DIMENSIONS

IMPORTANT: This Thermador 36" Induction Cooktop is not approved to be installed above a wall oven.

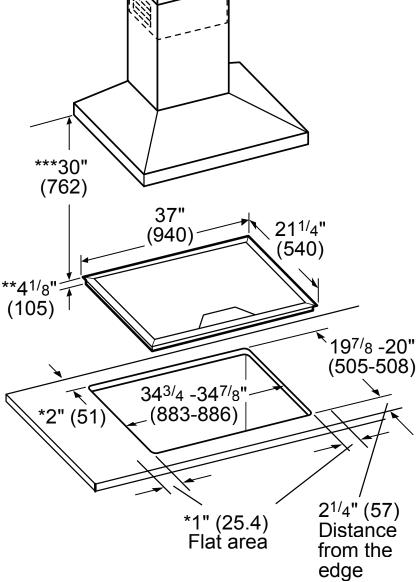

- * Minimum distance from the cutout to the wall
- ** Installed depth includes1" (26 mm) air clearance
- *** Minimum distance between surface of the cooktop and lower edge of the exhaust hood.

NOTE: The work surface should be horizontal and level. The stability of the countertop should be confirmed even after making the cutout.

Measurements in inches(mm in brackets)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 2 of 2