

PUCCM630S1

Canopy Hood

YALE
APPLIANCE




This model, with its pyramid shaped angles and stainless steel finish, makes a striking visual statement to any kitchen. Available in 30", features Black panel touch controls, LED lighting and 3-speed blower. It also features a telescopic chimney for up to 9'1" ceilings.

Designed for standard ducted installation it can also be installed as a recirculating system using the kit available as an accessory.

**MOUNTING
HEIGHT RANGE**

$\frac{1}{2} \leq 24" \leq 30"$

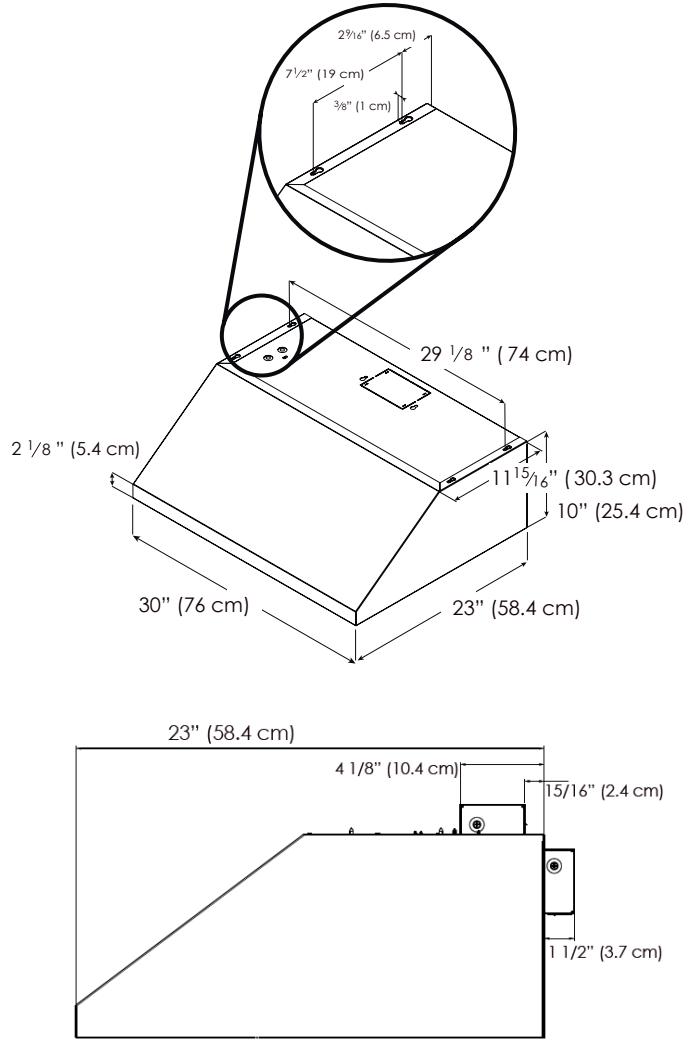

SPECIFICATIONS

Width:	30" Unit
Model:	PUCCM630S1
Dimensions:	30"W x 23"D x 10" H
Blower Type(internal):**	600 CFM(4-speed)
Noise (sones):**	2.0 - 7.0 Sones
Finish:	Stainless Steel
Controls:	Fully retractable rotating knobs with white backlighting
Illumination: (replaceable lamps 1 intensity)	2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp
Grease Filter:	(2) Grease Collecting Stainless Steel Baffle
Duct Transition:	3 1/4" x 10" rectangular with Backdraft damper (top or rear)
Installation Type:	Ducted or Recirculating with Kit
Mounting Height Range:	Electric ≥ 24", Gas ≥ 30"
Electrical:	120V - 60 Hz, 457 Watts
ACCESSORIES:	
Long Chimney Ext 6":	ACC02159
Long Chimney with grates:	ACC0207173
Long Chimney Ext 12":	ACC02160
Stainless Steel Backsplash:	ACC0142864
Recirculating Kit:	ACC02770 (contains 2 round carbon filters & cabinet grate)
Incline Blower Shell Kit:	ACC0205342 (600 CFM, 6" duct size)

WARRANTY: Two (2) years parts & in-home labor

FEATURES



QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking. Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with 600 CFM blower.

AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.



* The product images shown are for illustration purposes only and may not be an exact representation of the product.
 ** CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.