



**VG 264 214CA**

Stainless steel control panel  
 Natural gas  
 Width 24" (60 cm)

**Installation accessories**

**SH 260 000**

Hinge holder for mounting of  
 appliance cover VD 201  
 (order separately, order two)

**VV 200 014**

Connecting strip for combination  
 with other Vario cooktops

**Optional accessories**

**VD 201 014**

Brushed stainless steel appliance  
 cover (order two covers)  
 Cast-iron pan supports have to  
 be removed before cover can  
 be closed

**200 series gas cooktop**

**VG 264**

- Can be combined with cooktops of the Vario 200 series.
- Electric ignition of all burners. Simply press the knob, turn it and hold it there until a stable flame burns.
- Generous control panel for comfortable and secure operation.

Equipped for natural gas. Jets supplied for conversion to LP gas. (LP kit part# 419839)

**Cooking zones**

4 gas burners and pans suitable for pots up to max.  $\varnothing$  8 1/16":  
 2 high-output burners (560-2,800 W, 1,900 - 9,500 BTU).  
 2 standard burners (380-1,900 W, 1,300 - 6,500 BTU).

**Features**

Brushed stainless steel cooktop.  
 Automatic quick ignition.  
 Cast-iron pan support, also suitable for small pans.  
 Enameled burner cover.  
 All-gas valve with fine control

**Safety**

Safety thermocouple ignition.



**Planning notes**

The gas cooktop is equipped with a 55" connecting cable and grounded plug.  
 A minimum clearance of 4" from adjacent heat-sensitive cabinet or contact surfaces must be observed or thermal insulation must be installed.  
 Appliance clicks into place when inserted in the work top from above.

**Rating**

Total rating: 32,000 BTU  
 Total Amps: 1  
 120V / 60Hz

**Gas connection**

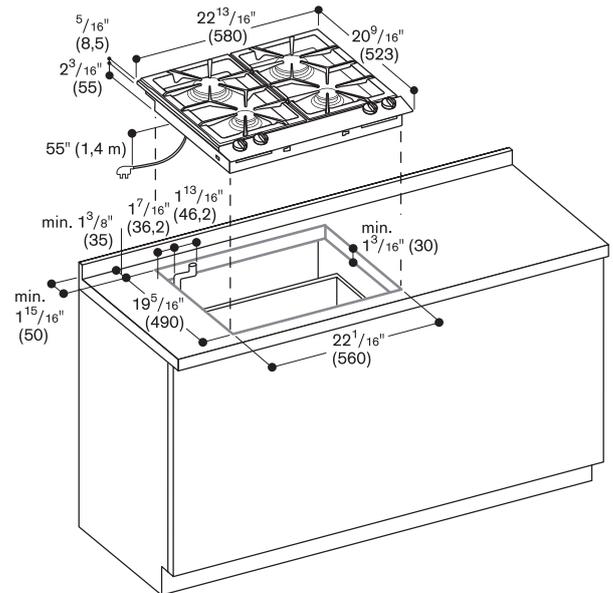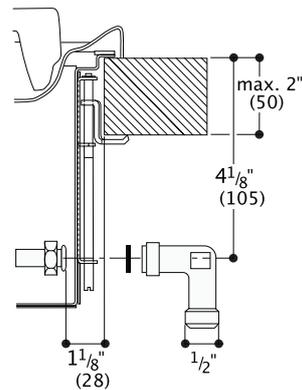

Numbers indicated inside parenthesis ( ) = mm