


FEATURES

- Tubular handle to match Wolf M series ovens and transitional products.
- Standard or flush inset installation.
- Crafted of heavy-duty stainless steel.
- Combines convection and steam heat to achieve superior results.
- Convection with twelve cooking modes—steam, reheat, auto steam bake, convection, convection humid, convection steam, Gourmet, slow roast, recipes, my recipes, keep warm and cleanse.
- Gourmet and recipes modes for quick, convenient meal preparation.
- Operating time, delayed start and descaling features.
- Four-level rack guides with two adjustable oven racks.
- Large viewing window and halogen interior lighting.
- Temperature probe, perforated and solid stainless steel pans.

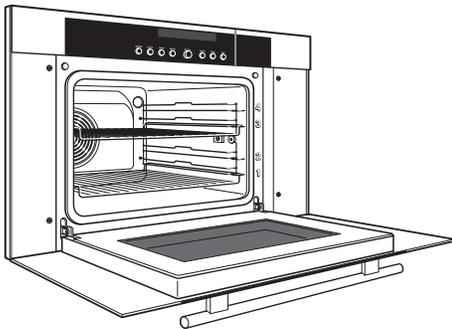

Model CSO30TM/S/TH

MODEL

Transitional

CSO30TM/S/TH



Interior (CSO24TE/S/TH shown).


ACCESSORIES

- Perforated stainless steel pans:
12³/₄" x 1¹/₂" x 7"
12³/₄" x 2¹/₂" x 7"
17³/₄" x 1¹/₄" x 15"
- Solid stainless steel pans:
12³/₄" x 1¹/₂" x 7"
12³/₄" x 1¹/₄" x 14"
17³/₄" x 1¹/₄" x 15"
- Porcelain baking sheet.
- Full-extension and standard oven racks.
- Descaling solution.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

SPECIFICATIONS	
PRODUCT	
Dimensions	29 ⁷ / ₈ "W x 17 ⁷ / ₈ "H x 21 ¹ / ₂ "D
Weight	80 lb
OVEN INTERIOR	
Capacity	1.8 cu ft
Interior	17 ⁷ / ₈ "W x 11"H x 15 ³ / ₄ "D
ELECTRICAL	
Supply	240/208 VAC, 60 Hz
Service	20 amp circuit
Power Cord	6'
POWER RATING	
Maximum	3800 W

DIMENSIONS

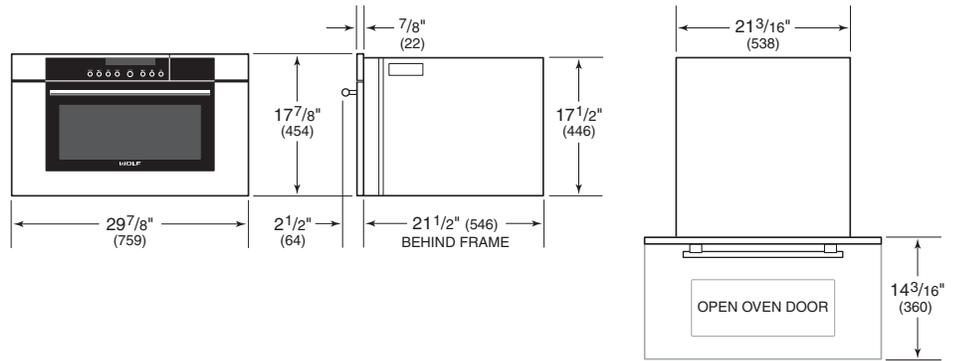

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8$ " (3). Dimensions in parentheses are millimeters unless otherwise specified.

STANDARD INSTALLATION



NOTE: 24" (610) and 30" (762) models require the same opening dimensions.
Electrical supply must be located in adjacent cabinet within 3' (9 m) of opening.

FLUSH INSET INSTALLATION

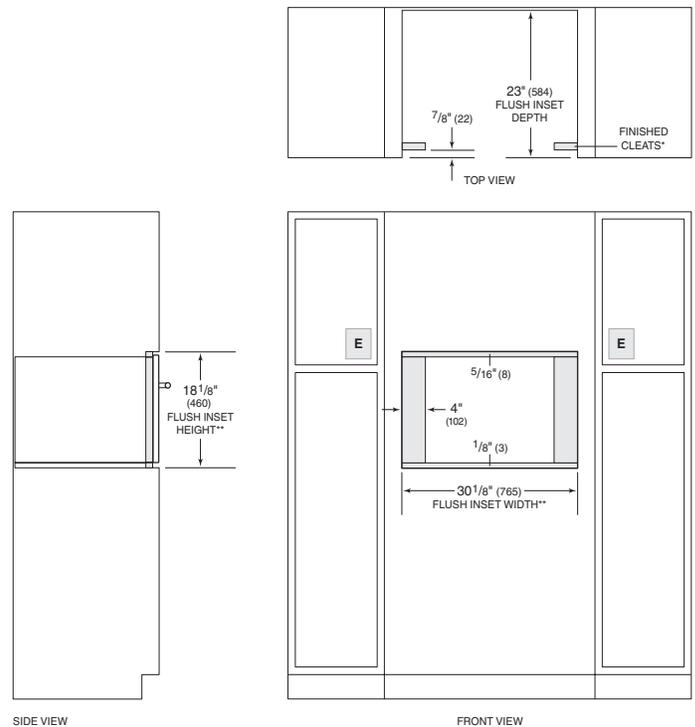

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
NOTE: Electrical supply must be located in adjacent cabinet within 3' (9 m) of opening.