

ES-A2315Z0-1



**Hisense**

# Quick Setup Guide

Before using the Smart Mini Projector, please read this guide carefully and keep it for future reference.

**English**

© 2023 Hisense Company Ltd. All Rights Reserved.

All material in this Quick Setup Guide is the property of Hisense Company Ltd. and its subsidiaries, and is protected under US, CANADA, MEXICO and International copyright and/or other intellectual property laws. Reproduction or transmission of the materials, in whole or in part, in any manner, electronic, print, or otherwise, without the prior written consent of Hisense Company Ltd. is a violation of Hisense Company Ltd. rights under the aforementioned laws.

No part of this publication may be stored, reproduced, transmitted or distributed, in whole or in part, in any manner, electronic or otherwise, whether or not for a charge or other or no consideration, without the prior written permission of Hisense Company Ltd.

Requests for permission to store, reproduce, transmit or distribute materials may be made to one of the following addresses:

U.S.A. Hisense USA Corporation  
105 Satellite BLVD Suite I, Suwanee, GA 30024

**MEXICO IMPORTER:**

Hisense Mexico S. de R.L. de C.V.  
Bldv. Miguel de Cervantes Saavedra No 301  
Torre Norte Piso 2, Col. Ampliación Granada  
Miguel Hidalgo, Ciudad de México, C.P. 11520  
RFC: HME110512IY3  
TEL: (52) (55) 5531-3515

**CANADA**

Hisense Canada Co., Ltd  
2283 Argentia Road, Unit 16  
Mississauga, ON, Canada  
L5N 5Z2

Hisense, and any and all other Hisense product names, logo's, slogans or marks are registered trademarks of Hisense Company Ltd. and its subsidiaries. All other trademarks are the property of their respective holders.

## Register Your Device!

Because we value your business, we want to keep you in the know of 'all things Hisense'. Using your mobile phone, scan the Registration page QR code to register your Device. Depending on the make and model of your phone, you may need to download a QR code scanning app.

U.S.



<http://www.hisense-usa.com/support/register>

Mexico



<https://hisense.com.mx/support/register>

Canada



[http://www.hisense- canada.com/support/  
productReg.asp](http://www.hisense-canada.com/support/productReg.asp)

### **Disclaimer:**

Subscriptions or other payments may be required to access content through some applications. Some or all of the included or downloaded application services in this Hisense device may not function depending on the Internet connection, local limitations of included applications or other reasons outside of Hisense's control. HISENSE EXPRESSLY DISCLAIMS RESPONSIBILITY FOR ANY APPLICATION SERVICE FROM FUNCTIONING AT ANY TIME, FOR CONTENT IN ANY APPLICATION SERVICE, FOR DISRUPTIONS OF SERVICE, LOCAL OR REGIONAL LIMITATIONS, WARRANTIES OF TITLE, NO INFRINGEMENT, AND FOR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. By purchasing this device, you accept such Disclaimer without any claim on Hisense at any time.

## Important Safety Information



### SAFETY WARNINGS

**Do not look directly at the lens when this device is on!**

- This product comes with a laser module. Do not tear or modify this device in any manner; otherwise, it may result in personal injury.

RG1 IEC 62471-5: 2015

CLASS 1 LASER PRODUCT IEC 60825-1: 2014

As with any bright light source, DO NOT STARE INTO THE BEAM

$\lambda = 458\sim 472\text{nm}/519\sim 531\text{nm}/635\sim 651\text{nm}$

Wavelength 458~472nm/519~531nm/635~651nm

Caution—use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

The Device Complies with 21 CFR 1040.10 and 1040.11 except for conformance as a Risk Group[0,1 or 2-Select appropriate RG]LIP as defined in IEC 62471-5: Ed.1.0. For more information see Laser Notice No.57, dated May 8, 2019.

- If this device requires a repair, please wear laser eye protection with an optical density OD that is 4 or higher and has a wave length of 458-651 nm.
- Do not place any water-containing vessel on this device, such as cosmetics or liquid medicine.

- If any object or water enters this device, please unplug this device and contact the service staff of Hisense.
- Do not place any exposed fire source (e.g. burning candle) on this device. Keep away from high temperature and heat.
- Do not expose the battery to direct sunlight or candle light.
- Keep air vents on both sides clear from any objects to prevent the device from overheating inside.
- To avoid a short circuit, product damage or electric shock, do not use any sharp object or metal to touch the ports or other openings on the device.
- If this device has been in a warm environment, allow any built-up condensation to evaporate first BEFORE you switch the device on.
- Do not allow a child to stand on or climb up this device.
- Do NOT place any object above or in front of the lens because the laser light could cause the object to become flammable.
- Clean the lens periodically with a clean cloth and make sure the device is turned off before you start.

## Low Blue light Content

- The long-term exposure to blue light may damage your eyes, in particular the retina, causing visual fatigue or eye strain. Children are particularly vulnerable to excessive blue light and the damage to them is irreversible. The product can decrease blue light ratio to reduce blue light hazard.

## Health recommendations

- Avoid long time continuous use product, ensure adequate break time.
- Looking at distant objects or exercises for the eye after use product.


## Packaged Contents

- Smart Mini Projector
- 1 Remote Control
- 2 AAA Batteries
- 1 Power Cord
- 1 Power Adapter
- Quick Setup Guide
- Important Safety Information & Warranty Card
- 1 HDMI Extension Adapter

### NOTE:

- The accessories may be different from the list above due to different models, countries/regions. Please refer to the actual accessory bag.
- Screen is not included.

## Smart Mini Projector Diagram



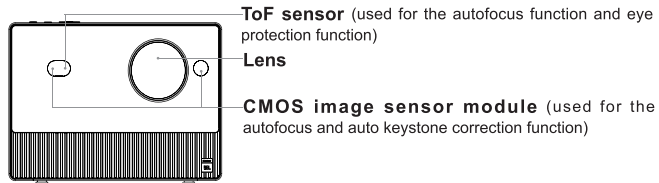


### Detection range :


1. CMOS image sensor module: DFOV:78°, HFOV:70°, VFOV:43°
2. Time-of-Flight Sensor: 400mm-2000mm, FOV:27°

### NOTE:

- The rated detection range of sensors may vary with different testing environments and conditions under different test product.
- Risks are inevitable in the usage of the projector even with eye protection function on. Children must be accompanied by adults when using it.
- Product image is only for reference, actual product may vary in appearance.

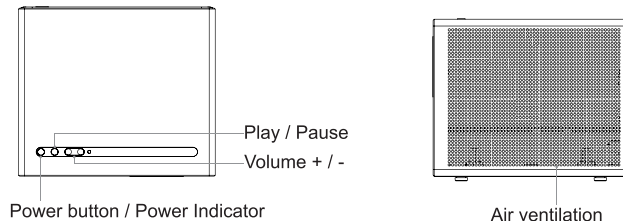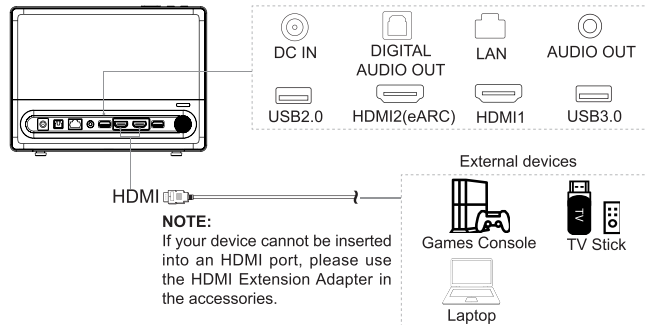

## Use Your Remote

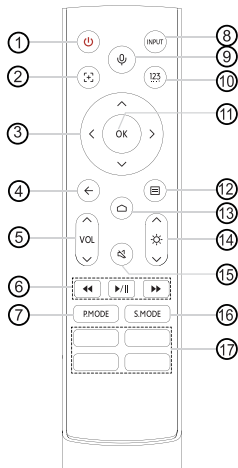

- |                                                   |                                                                      |
|---------------------------------------------------|----------------------------------------------------------------------|
| ① Power on/Standby                                | ⑨ Activate the microphone                                            |
| ② Press to enable automatic focus                 | ⑩ Input numbers and special function buttons                         |
| ③ D-pad (up/down/left/right navigation buttons)   | ⑪ Confirmation button                                                |
| ④ Return to the previous place in the menu or app | ⑫ Press to enter Menu<br>Press and hold to pair the bluetooth remote |
| ⑤ Volume (up/down)                                | ⑬ Display the Home screen                                            |
| ⑥ Media content control function buttons          | ⑭ Adjust brightness                                                  |
| ⑦ Quick access to picture mode                    | ⑮ Press to Mute or restore sound                                     |
| ⑧ Change input source                             | ⑯ Quick access to sound mode                                         |
|                                                   | ⑰ Quick access buttons to apps                                       |

### NOTE:

- The included remote will vary depending on models, countries/regions. Check information according to the actual remote in the accessory bag.
- Insert two AAA size batteries. Make sure to match the (+) and (-) ends of the batteries with the (+) and (-) ends indicated in the battery compartment.
- The remote control can work at a distance of up to 8 metres in front of the device.

# 1 Basic Operation

## Turning the device on or off


1. Plug the power cord into a wall outlet.
2. Press the  button on the remote to turn on the device. When you turn it on for the first time, follow the instructions displayed on the screen and configure the device's basic settings.

### NOTE:


- When the device is started up, you can press the  button on the remote to turn it into standby mode; When the device is in standby mode, you can press the  button on the remote to turn on the device.
- Plug the power cord off a wall outlet when you do not use the device for a long time.
- Please wait at least 10 seconds to turn on the device again when it is shut down.

 **WARNING:** Insufficient ventilation space will cause this device to overheat or become damaged.

- Do not block the air vents or place any object on this device.
- Do not place this device in any narrow, enclosed or poorly ventilated space.



- At a minimum, leave the amount of space shown in the diagram below for this device to have proper ventilation.



## 2 Automatic Focus

When the automatic focus function is enabled, the device can automatically adjust the focus to make your projector picture clear.

- Enable automatic focus function by pressing the  button on the remote.
- You can enable manual focus function by pressing and holding the  button, and manually adjust the focus by pressing the D-pad on the remote.

## 3 Automatic Correction

Press Home button on your remote, and select  **Settings** > **Projector** > **Auto Correction**.

The device can perform automatic keystone correction on the projected screen and automatically changes the screen shape into a rectangle.


## 4 More Settings

Press Home button on your remote, select  **Settings** to enter the Settings Menu to set up your device.

### NOTE:

- For detailed instructions, please refer to the E-Manual.
- Parts of the software function changes with the system upgrade.

## 5 Image Size and Projection Distance

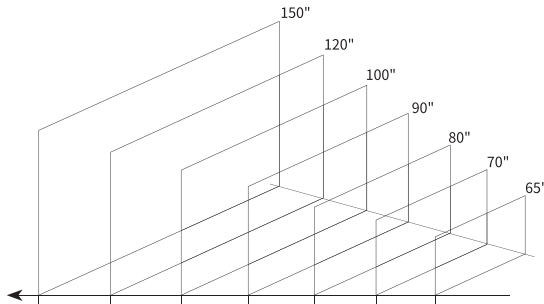

| Screen Size         | 150" | 120" | 100" | 90"  | 80"  | 70"  | 65"  |
|---------------------|------|------|------|------|------|------|------|
| Projection Distance |      |      |      |      |      |      |      |
| mm                  | 3985 | 3188 | 2657 | 2391 | 2125 | 1860 | 1727 |
| inch                | 157  | 126  | 105  | 94   | 84   | 73   | 68   |

## Text-to-Speech (TTS)

Text-to-Speech (TTS) can help you to navigate the menus on the screen.

Text-to-Speech can convert written text into voice text to help visually impaired people listen to the information they are unable to read.

1. Press the Home button on your remote.
2. Next, select  **Settings** to enter the Settings Menu.
3. Select **Accessibility > Voice Guide**.

When Voice Guide is turned on, then the contents of each menu displayed can be broadcasted out.

<https://www.hisense-usa.com/hisense-laser-cinema-c1-text-to-speech>



## Maintenance

- Do not touch this device when it is running or just turned off because it may be hot.
- Do not wipe this device with oil because it may deteriorate the exterior or damage the paint. Contact with rubber or ethylene products for a long time may cause stains on this device.
- If the outside of the device is dirty, turn off the device and wipe with a dampened soft cloth.
- Do not touch the lens with your hands.
- Do not touch or wipe the lens with ordinary cleaning cloth. Use a dust blower to remove the dust on the lens. Grease, dirt and fingerprints should be cleaned carefully by the professional by using optical cleaning cloth, lens wiping paper or professional cleaning solutions to avoid destroying the optical filming and affecting the image quality.
- To turn off this device, press the Power button on the remote control. Do not cut off the power directly when the device is working.

## Quick Problem-Solving Tips

When you experience an issue with your Projector, please turn it off and on again. If this does not resolve the problem, then refer to the tips below.

### 1. When turn on projector, there is a delay for a few seconds before the picture appears

- This is normal because your Projector is initializing and searching for previous setting information.

### 2. No sound or picture

- Check if the power cord is plugged into a powered AC outlet.
- Press the Power button on the remote control to activate the unit from 'Standby' mode.
- Check the volume settings or 'Mute' mode is set to On.

### 3. Some irregular shadow appear on the edge of the picture after keystone correction

- Hisense projectors use digital correction, so the true resolution fills on the actual display area and leaves some surrounding area unused after a keystone correction is completed.

### 4. When projector is moved, automatic keystone correction function does not work properly

- Make sure that the Auto Shift Correction function is turned on in projector settings.
- Make sure that no obstacle is in front of the projection lens or camera module.

### 5. Remote control does not work properly

- Check if the battery power is normal.
- Take out the batteries, press any key for 1~2 seconds, and insert them back.
- In special cases, press and hold [  ] button to pair.

If you still have other questions, please log in to the following website and find local CUSTOMER CENTER Service Hot-line for help.

<https://global.hisense.com/support/customer-center/>

## Product Specifications

|                               |                                                                                                           |
|-------------------------------|-----------------------------------------------------------------------------------------------------------|
| Model Name                    | C1                                                                                                        |
| Dimension (W × H × D)         | 9.6 × 8.5 × 7 inches<br>(245 × 216 × 179 mm)                                                              |
| Weight                        | 10.1 lbs (4.6 kg)                                                                                         |
| Active Screen Size (Diagonal) | 65 ~ 150 inches                                                                                           |
| Screen resolution             | 3840 × 2160                                                                                               |
| Audio power                   | 2 × 10 W                                                                                                  |
| Power consumption             | 179.93 W                                                                                                  |
| Power supply                  | 100-240V~ 60/50Hz Max 2.5A                                                                                |
| Power input                   | 19V $\approx$ 9.47A                                                                                       |
| Environmental conditions      | Temperature: 41°F - 95°F (5°C - 35°C)<br>Humidity: 25% - 75% RH<br>Atmospheric pressure: 86 kPa - 106 kPa |
| Storage Temperature           | 5°F to 113°F (-15°C to 45°C)                                                                              |
| Storage Humidity              | 10% to 70%, non-condensing                                                                                |

### Disclaimer:

All products, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

## Certification and Compliance

### FCC Notice

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or Smart Mini Projector reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/Smart Mini Projector technician for help.

The Wi-Fi Module complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR SMART MINI PROJECTOR INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

## Declaration of Conformity

Trade Name: Hisense

Model: C1

Responsible Party: Hisense USA Corporation

Address: 105 Satellite BLVD Suite I, Suwanee, GA 30024

Telephone Number: 1-888-935-8880

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Dolby, Dolby Vision, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2022 Dolby Laboratories. All rights reserved.



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.



©2023. All rights reserved. Hisense and the Hisense logo are registered trademarks of Hisense. Other brand and product names are registered trademarks of their respective owners.