

ASSEMBLY INSTRUCTIONS COASTER FINE FURNITURE



Fine Furniture for every stage of life

950318 <u>Bar Cabinet</u>

REVISION 0: 05/16/2023

PAGE 1 OF 5

COASTERFURNITURE.COM



ASSEMBLY INSTRUCTIONS

ASSEMBLY TIPS:

- 1. Remove hardware from box and sort by size.
- 2. Please check to see that all hardware and parts are present prior to start of assembly.
- 3. Please follow attached instructions in the same sequence as numbered to assure fast & easy assembly.



WARNING!

- 1. Don't attempt to repair or modify parts that are broken or defective. Please contact the store immediately.
- 2. This product is for home use only and not intended for commercial establishments.



ASSEMBLY TIME

5 MINUTES

PARTS IDENTIFICATION

TAKTO IDENTIFICATION					
A	CABINET		1PC		
В	LEG FRAME		2PCS		
С	LEG FRAME SUPPORT		4PCS		
Y	HANDLE WITH SCREW	(†)11000 (†)11000	2SETS		

HARDWARE IDENTIFICATION

1	BOLT (M6 x 16mm - SIL)		24PCS
2	ALLEN WRENCH (M4 X 70mm - BLK)		1PC
3	FLAT WASHER (M8 X 20mm - SIL)	\bigcirc	24PCS


NOTE:

Phillips head screw driver is required in the assembly process; however, manufacturer does not provide this item.


ASSEMBLY INSTRUCTIONS




STEP 1

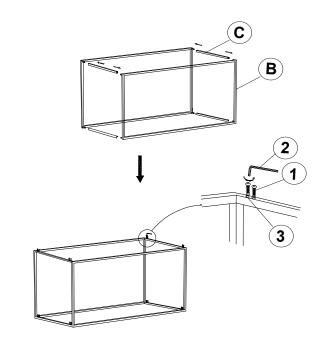


STEP 2

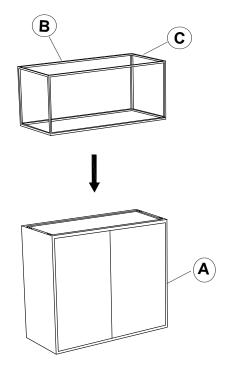

STEP 3

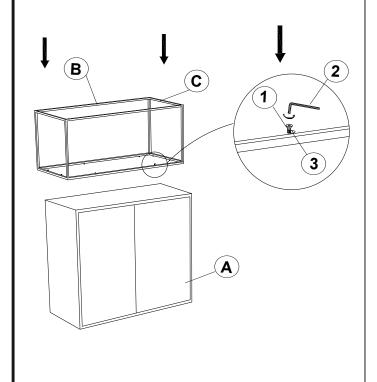

STEP 4

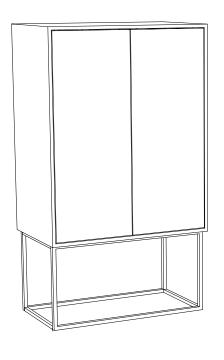


PAGE 3 OF 5


COASTER FINE FURNITURE

ASSEMBLY INSTRUCTIONS

STEP 5

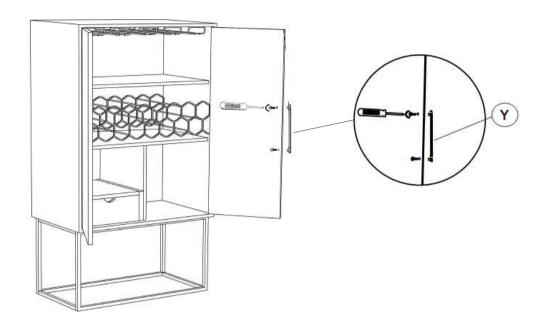

STEP 6 COMPLETE







ANTI-TIPPING INSTALLMENT INSTRUCTIONS FURNITURE TIPPING RESTRAINT

WARNING

Injury may result from tipping furniture.


This restraint may protect against tipping furniture.

Do not allow children to climb on furniture.

This restraint is not a substitute for proper adult supervision.

Failure to detach this restraint before moving the furniture may result in injury and damage.


- 1. Attach one of the mounting brackets securely to the back edge of the furniture. Use the short screws.
- 2. Determine where the furniture is to be placed and mark location on the wall for the mounting bracket screw hole approximately 2" below the bracket mounted to the edge of the furniture.
- 3. Drill two 3/16" holes in the wall. Press the plastic wall plugs into the holes and gently tap until the flanges on the wall plugs are against the wall surface.
- 4. Position the bracket over the wall plugs and use the long screws to securely attach the bracket to the wall.
- 5. Place the furniture so the bracket on the back edge is in line with the bracket on the wall.
- 6. Lace an end of the cable tie down through each bracket. Bring both ends together and slide the beaded end of the cable tie through the keyhole shaped slot on the other end until snug. Pull down on the beaded end until it snap locks into the keyhole slot.
- 7. To double lock return the beaded end back through the keyhole as shown.
- 8. Check to make sure the cable tie is securely laced and locked to the brackets.

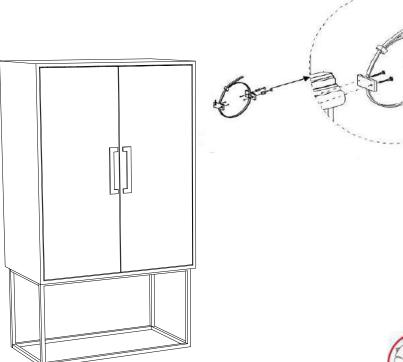








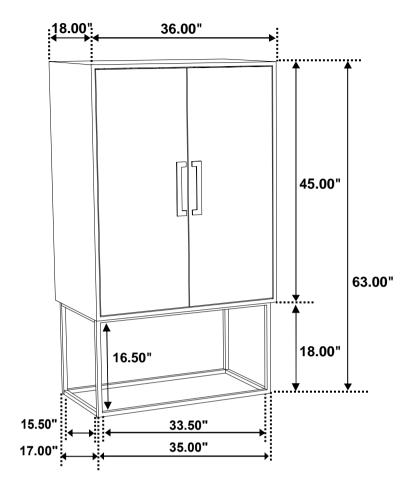

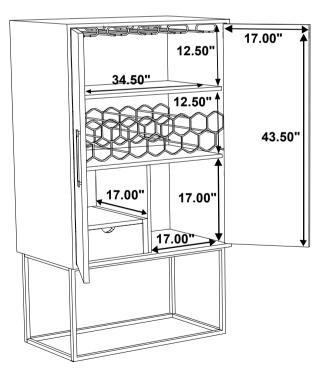

Note: Dimension tolerance ±5%