

## Refrigeration Equipment Pizza Preparation Table, 2 Door with 9GN 1/3 containers - Stainless Steel (R290)

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738253 (KCHPT72.9)

2-door pizza preparation table, 72", R290 refrigerant gas, +33/+41°F, stainless steel

### Short Form Specification

#### Item No.

2-door pizza refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x70.79x19.53 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.


### Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 9 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Optional Accessories

- shelf for 72" pizza counter PNC 880602 ☐
- shelf clips PNC 880611 ☐

APPROVAL: \_\_\_\_\_

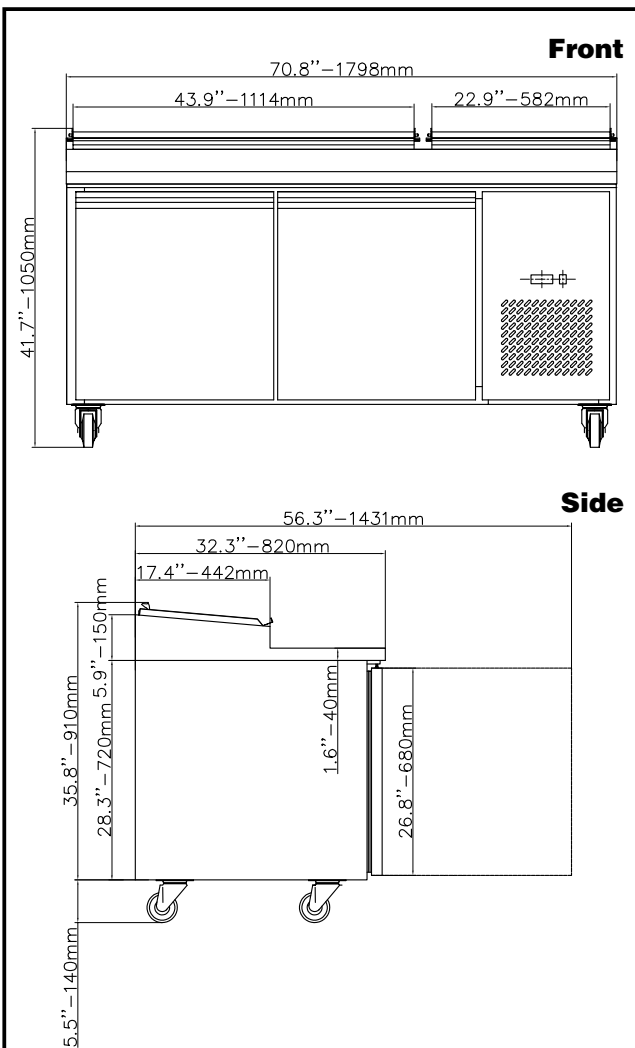

El = Electrical connection

## Electric

### Supply voltage:

738253 (KCHPT72.9) 115 V/1 ph/60 Hz

### Electrical power, max:

0.8 kW

### Current consumption:

7.5 Amps

### Plug type:

NEMA 5-15

## Capacity:

### Gross capacity:

22 cu.feet

## Key Information:

### Door hinges:

1 Left+1 Right

### External dimensions, Width:

70 13/16" (1798 mm)

### External dimensions, Depth:

32 1/4" (820 mm)

### External dimensions, Height:

41 5/16" (1050 mm)

### Number and type of doors:

2 Full

### Internal Dimensions (depth):

22 13/16"

### Internal Dimensions (height):

26 3/16"

### Internal Dimensions (width):

48 7/16"

### Shipping height:

44 1/2" (1130 mm)

### Shipping weight:

434 lbs (197 kg)

### Shipping volume:

63.65 ft<sup>3</sup> (1.8 m<sup>3</sup>)

### Type of grids (included):

Vinyl-Coated steel

### Type of external material:

Stainless Steel

### Type of internal material:

304 AISI

### Warranty:

3 / 5 years

## Refrigeration Data

### Compressor power:

### Refrigerant type:

R290

### Refrigerant weight:

105 g

### Operating temperature min.:

32 °F

### Operating temperature max.:

41 °F

### Condenser type:

Fin & tube

### Defrost type:

Auto Defrost