

18" OVERLAY BUILT-IN DISHWASHER



CODE ID

18" OVERLAY DISHWASHER

F4DWS18FI1



Sound Level 49 dB(A)



Steel Tub



Fast Wash Cycle



1/2 Load Cycle



Delayed Start



China and Crystal Cycle

SPECIFICATIONS


10 Place settings
6 Programs
Sound level 49 dB(A)
Super active drying
Fully built-in top control
2 Foldable racks upper basket
Flow through heater
3 way Euro filtering system
Adjustable hinge system
Front adjustable rear feet
Airbreak with drain backsiphonage preventer
Overflow & leakage protection



This product meets ADA (Americans with Disabilities Act) requirements. Please check with your local municipality's codes and stipulations for additional details to ensure compliance.

DISTINTO

18" INTEGRATED DISHWASHER

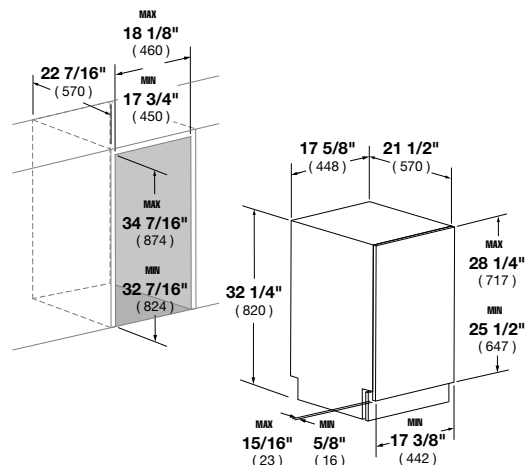

CODE ID	18" BUILT-IN DISHWASHER F4DWS18FI1
Finish	Panel Ready
CONTROL PANEL	
Position	Top of door
Type	Electronic
DISPLAY	
Rinse Aid Indicator	Electronic with White Color
LED Spot	•
MAIN FEATURES	
Loading Capacity (Place Settings)	10
Tub Material	Stainless Steel
Inner Door Material	Stainless Steel
Overflow Protection	•
Delay Timer	1 - 19 hours
3-way Euro Filter	•
Flow Through Heater	•
Silent Operation	49 dB(A)
FUNCTIONS	
Hi-Temp Options	•
Half Load (3 Modes)	•
Sanitize Option	•
Extra Drying Option	•
End of Cycle Indicator	•
Buzzer	•
Extra Fast	•
PROGRAMS	
Number of Programs	6
Regular	•
Auto	•
Intensive	•
Delicate	•
Super	•
Rinse	•
TECHNICAL FEATURES	
Permissible Water Pressure	4.35 - 145 psi (0.3 - 10 bars)
Electrical Connection	120V, 12A, 60Hz
Total Power	1400 W (watts)
Heater Power	1100 W (watts)
Shipped Power Connector	NEMA 5-15P connector
RACK SYSTEM	
Cutlery Basket	•
Upper Rack (Inset Shelves)	•
Adjustable Upper Rack	Adjustable when loaded
ENVIRONMENTAL STANDARDS	
ENERGY STAR® Qualified	•
Energy Consumption, Wh/year	250
Water Consumption gal/cycle	3.2
RoHS compliant (Lead Free)	•
DIMENSIONS/WEIGHT	
Product Height, in. (mm)	32-1/4 (820)
Product Width, in. (mm)	17-5/8 (448)
Product Depth, in. (mm)	21-1/2 (570)
Cutout Height, in. (mm) (min - max)	32-7/16 - 34-7/16 (824 - 874)
Cutout Width, in. (mm) (min - max)	17-3/4 - 18-1/8 (450 - 460)
Cutout Depth, in. (mm)	22-7/16 (570)
Panel Height, in. (mm) (min - max)	25-1/2 - 28-1/4 (647 - 717)
Panel Width, in. (mm) (min)	17-3/8 (442)
Panel Depth, in. (mm) (min - max)	5/8 - 15/16 (16 - 23)
Product Weight, lbs. (kg)	78 (35.5)
INSTRUCTIONS FOR USE	
Use & Care Manual / Installation Manual	English / Spanish / French