



**VP 230 620**

Black control panel  
Width 12" (28 cm)

**Included accessories**

1 spatula

**Installation accessories**

**VV 200 010**

Stainless steel connection strip for combination with other Vario appliances of the 200 series

**VV 200 020**

Black connection strip for combination with other Vario appliances of the 200 series

**Optional accessories**

**VD 200 020**

Black appliance cover

**Vario 200 series Teppan Yaki**

**VP 230**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation
- Cooking directly on the metal surface, without any pots or pans
- Exact temperature control up to 480 °F
- Keeping warm setting

**Cooking zones**

Useable area: 9 7/32 " x 15 25/32" (234 x 401 mm).

**Operation**

Control knobs with illuminated ring.  
Integrated control panel.  
Electronic temperature control from 240 °F to 480 °F.

**Features**

Heating element with 1800 W.  
Keeping warm setting.  
Cleaning setting.  
Stainless steel frame seamlessly welded with the stainless steel surface.

**Safety**


Pre-heat and residual heat indicator.  
Operation indicator.  
Safety shut-off.

**Planning notes**

The distance from the upper edge of the work surface to the upper edge of the intermediate shelf must be at least 6" (150 mm).  
Appliance can be snapped into the countertop from above.  
A minimum lateral clearance of at least 1 3/16" (30 mm) from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Intermediate shelf required; after installation, this shelf must only be removed using tools to guarantee the touch protection from below.  
Appliance weight: approx. 22 lbs (10kg).

**Rating**

Total rating: 1.8 kW.  
Total Amps: 10 A.  
208 – 240 V / 60 Hz  
Plan for a 59" connecting cable without plug (hardwire required).

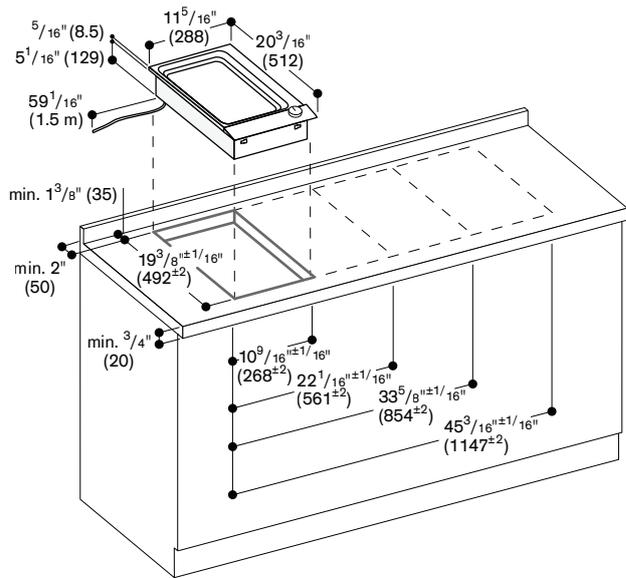

Numbers indicated  
inside parenthesis ( ) = mm