


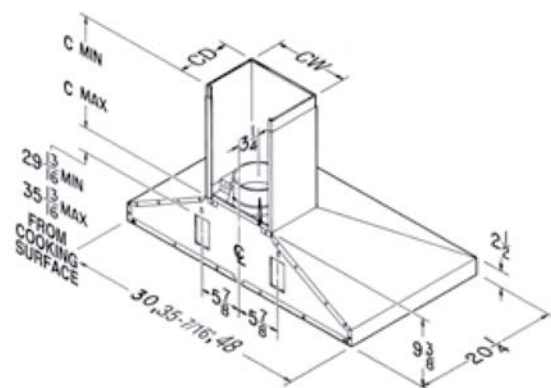
# Broan Elite 61000/61000EX

A flawless look. A lasting impression. Beautiful stainless steel construction in a wall mounted design.



	<b>STAINLESS</b>
	<b>INTERNAL BLOWER</b>
	30" 613004 35-7/16" 619004 48" 614804
	<b>EXTERNAL BLOWER</b>
	35-7/16" 619004EX 48" 614804EX

- Seamless corners for easy cleaning.
- Concealed three-speed slide control (EX models have variable speed control).
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- The 61000EX models are designed to operate with the Broan Elite External blowers, providing a choice of four Exterior models: 600, 900, 1200 or 1500 CFM, or four In-Line models: 280, 600, 800 or 1100 CFM
- <300 CFM with optional ARP6 (See below).
- Two 20-watt (four in 48") halogen lamps included (one level).
- Available in 30", 35-7/16" (90 cm) or 48" sizes.
- Ducted/non-ducted telescopic flues fit 8' to 9' ceilings.
- Convertible to ducted or non-ducted operation\*\* (excludes 48" model).
- Easily removable, dishwasher-safe, stainless steel grease filters.
- Optional ducted flue extension for up to 10' ceilings (units using flue extensions are for ducted applications only).



## SPECIFICATIONS

Width	CFM	Blower	Sones	Volts	Amps	Duct	Flue Extension*	Non-ducted Filter	Make-Up Air Damper
30"	450 <sup>+</sup>	Internal	9	120	3.1	6" RD	RFX6104	ROUNDFILTER	MD6TU, MD8TU, MD10TU
35-7/16"			9						
48"	900		9.5		6.3	8" RD	RFX6104EX	—	
35-7/16"	†	External†	—		0.5***				
48"			0.8***						

	C MIN	C MAX	CD	CW
613004	25-5/8"	45-1/2"	6-5/8"	9-1/4"
619004				
619004EX				
614804	22"	37"	10-3/8"	12-3/4"
614804EX				

\* Optional ducted flue extension for 10' ceiling.

\*\* Requires a non-ducted filter kit, purchase separately. Round filter or SB0899736.

\*\*\* Hood amps w/o blower, for total system amps, combine hood w/ External blower amps.

† External blowers sold separately.

+ 299 CFM max with ARP6 reducer plate option.