accucold

ARS3ML



34" x 18.5" x 19" (H x W x D)

Performance series Med-Lab 3 cu.ft. counter height all-refrigerator with hospital grade cord with 'green dot' plug and antimicrobial silver-ion handle

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Additional sensor reads interior air temperature for superior temperature control

Product Features:


Purpose-built design	Designed and purpose-built to meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications
+/-1ºC Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +10ºC
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce germ spread
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)


ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**

accucold

ARS3ML Specifications:

Overview	
Height of Cabinet	34.0" (86 cm)
Width	18.5" (47 cm)
Width with Door Open	19.0" (48 cm)
Depth	19.0" (48 cm)
Depth with Handle	20.75" (53 cm)
Depth with door at 90°	36.0" (91 cm)
Capacity	3.0 cu.ft. (85 L)
Defrost Type	Automatic
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	0.6
Voltage/Frequency	115 V AC/60 Hz
Weight	85.0 lbs. (39 kg)
Shipping Weight	92.0 lbs. (42 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101062631
Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	Wire
Shelf Qty	4
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R600a
Refrigerant Amount	1.06oz.
Interior Light	Yes
Temperature Range	2 to 10ºC
Dimensions	
Interior Height	28.38" (72 cm)
Interior Width	15.25" (39 cm)
Interior Depth	11.75" (30 cm)
Compressor Step Height	8.0" (20 cm)
Compressor Step Width	15.25" (39 cm)
Compressor Step Depth	3.75" (10 cm)

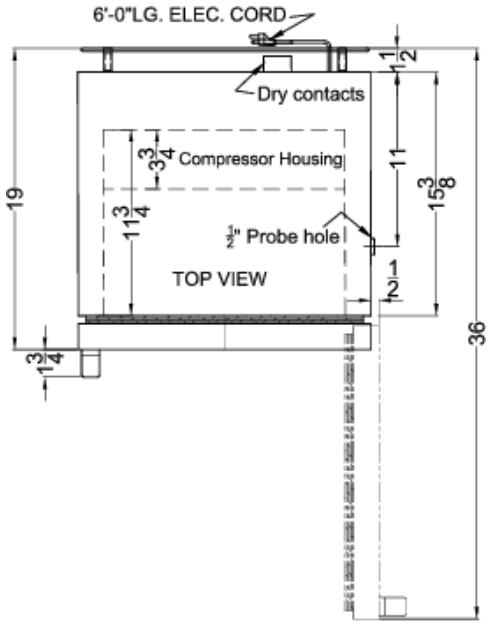

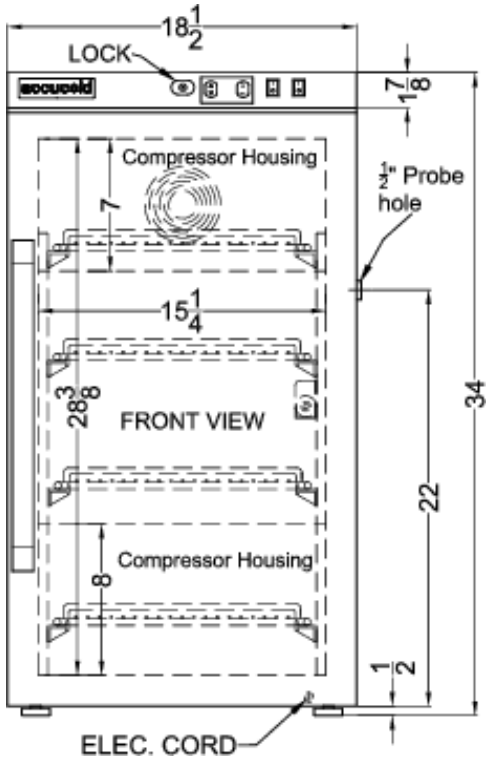

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**